

Bussmann

MAXI® Fuseholders


HHX

Description

- In-Line Fuseholders for MAXI® Fuses.
- Voltage Rating: 32Vdc maximum
- Current Rating: See Table
- · Firewall mounting hole permits two or more holders to be mounted together. Cover comes with a removable strap.

Ordering

Specify packaging and product code

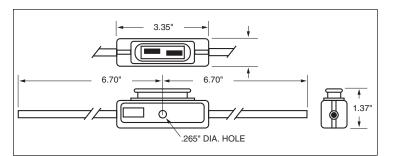



Catalog			Electrical	Maximum Continuous
Code	Description	Fuse Size	Connection	Current Rating
HHX	Black fuseholder w/cover	20-60A	#6 red lead wire;	48A*
HHX-B	Black fuseholder - Body only		5" length with blunt ends	
HHX-C	Black cover only			

* or 80% of fuse rating, whichever is less

A fuse must be properly and fully inserted into the holder to provide a solid connection. Poor or improper insertion of the fuse can result in failure of the fuse and holder, thus not protecting the device for which it was intended.

PACKAGING CODE		
Packaging Code	Description	
BK	100 pieces in a box	



Visit us on the web at: www.cooperbussmann.com

OC-2600 3/07

© Cooper Electronic Technologies 2007 **Cooper Electronic Technologies** 1225 Broken Sound Parkway NW Suite F Boca Raton, FL 33487-3533 Tel: 1-561-998-4100 Fax: 1-561-241-6640 Toll Free: 1-888-414-2645

North America Cooper Bussmann P.O. Box 14460 St. Louis, MO 63178-4460 Tel: 1-636-394-2877 Fax: 1-800-544-2570

Europe jies |Cooper Electronic Technologies **Cooper Electronic Technologies** Cooper (UK) Limited Burton-on-the-Wolds Leicestershire • LE12 5TH UK Tel: +44 (0) 1509 882 737 Fax: +44 (0) 1509 882 786

Avda. Santa Eulalia, 290

Fax: +34 937 362 719

Terrassa, (Barcelona), Spain Tel: +34 937 362 812 +34 937 362 813

08223

Asia Pacific Cooper Electronic Technologies 406-01 Pacific Tech Centre Singapore 159303 Tel: +65 278 6151 Fax: +65 270 4160

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton: ВК/ННХ ВК/ННХ-В ННХ-20Т