


- 1 USE A P.C.B. WHOSE SURFACES ARE TREATED WITH SOLDER RESIST. SHOW P.C.B LAYOUT FROM THE CONNECTOR-MOUNTING SURFACE SIDE. NUMBER THE CONTACTS IN THE P.C.B OR CONNECTOR CONSECUTIVELY FROM THE -BSC- SIDE.
 - 2
 - 3
 - 4 WHEN SCREWING THE CONNECTOR TO THE P.C.B, USE M2 SCREW, NUT AND WASHERS.
- △ HOUSING MATERIAL : GLASS 20% FILLED P.B.T RESIN (UL94-V0). COLOR:BLACK
 △ CONTACT MATERIAL : PHOSPHOR BRONZE.
 △ FINISH : NICKEL 0.00127 MIN THK OVERALL SELECTIVE GOLD 0.00076 MIN THK ON CONTACT AREA AND TIN 0.001MIN THK ON TINE AREA.
 △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	6	8	96	47	59.61	63.86	67.09	73.09
OBSOLETE	6	6	48	23	29.21	33.38	36.61	42.61
	6	5	34	16	20.32	24.49	27.72	33.72
	6	4	60	29	36.83	41.00	44.23	50.23
OBSOLETE	6	3	50	24	30.48	34.65	37.88	43.88
	6	2	40	19	24.13	28.30	31.53	37.53
OBSOLETE	6	1	30	14	17.78	21.95	25.18	31.18
	P/N	POS	n	A	B	C	D	

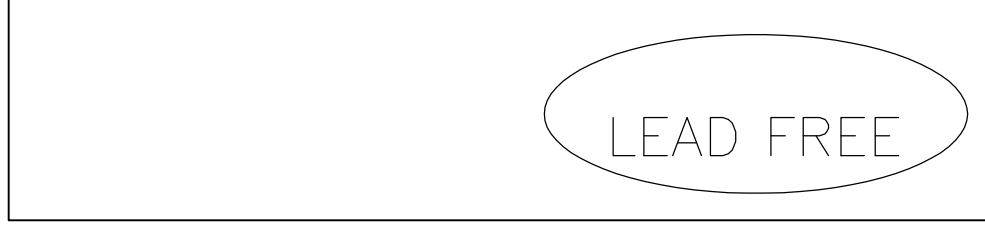

GENERAL TOLERANCE

$10 \geq : \pm 0.2$
 $30 \geq > 10 : \pm 0.25$
 $100 \geq > 30 : \pm 0.3$
 ANGLES: $\pm 3^\circ$

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -
FINISH	参照 △

MATERIAL 参照 △△

STE TE Connectivity

PLUG ASSY HORIZONTAL
AMPLIMITE .050 SERIES I B-TO-B CONN.

108-10036

APVD I.ENOMOTO

APVD 23AUG2004

APVD 23AUG2004

NAME

SIZE A3 CAGE CODE 00779 DRAWING NO C-5173277 RESTRICTED TO

CUSTOMER DRAWING SCALE 2:1 SHEET 2 OF 2 REV B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-5173277-2](#)