


CARRIER STRIP PROGRESSION





- NOTES:
1. MATERIAL: BRASS
 2. FINISH: 20 MICRORINCH / (0.5 MICROMETER) MIN. PREPLATED HOT TIN DIP FINISH.
 3. PRODUCT SPECIFICATION: PS-43374-001.
 4. PACKAGING: TERMINALS WOUND ON 24" REELS WITH PAPER INTERLEAF, 3000 PER REEL.
 5. THIS TERMINAL INTENDED FOR USE WITH TWO 20 AWG STRANDED WIRES, UL STYLE 1007 OR 1015.
 6. TERMINAL MATES TO .125/3.18 WIDE X .020/0.51 THICK FLAT BLADE TERMINALS. MATING TERMINAL: 43178 SERIES
 7. SEE PRODUCT SPECIFICATION FOR INSULATOR HOUSINGS USED WITH TERMINAL.

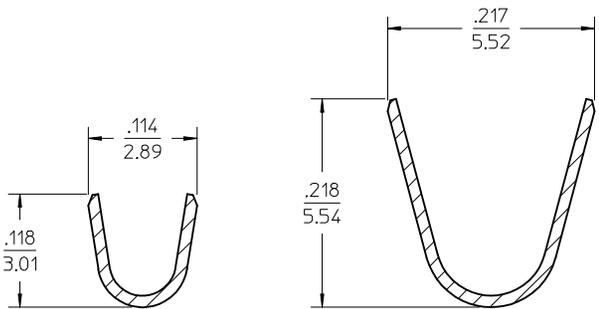

SECTION S-S
CONDUCTOR CRIMP


SECTION R-R
INSULATION CRIMP

CORRECT TOLERANCE EC NO: UCP2014-5466 DRWN:JDOX 2014/07/09 CHKD:ANDERSON 2014/07/09 APPR:FSMLTH 2014/07/17	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 10:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY BWIRKUS	DATE 1-25-2010	TITLE TERMINAL, FEM, 2X20 AWG FOR .125/(3.18) WIDE TAB W/O TPA; UL1007, 1015			
		4 PLACES ± --- ± ---			CHECKED BY BWIRUS	DATE 1-25-2010				
		3 PLACES ± --- ± .010			APPROVED BY APATEL	DATE 1-25-2010				
2 PLACES ± 0.25 ± .014			MATERIAL NO. 433745001		DOCUMENT NO. SD-43374-331		SHEET NO. 1 OF 1			
1 PLACE ± 0.35 ± ---			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							
0 PLACE ± --- ± ---			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

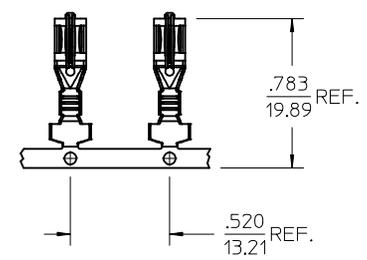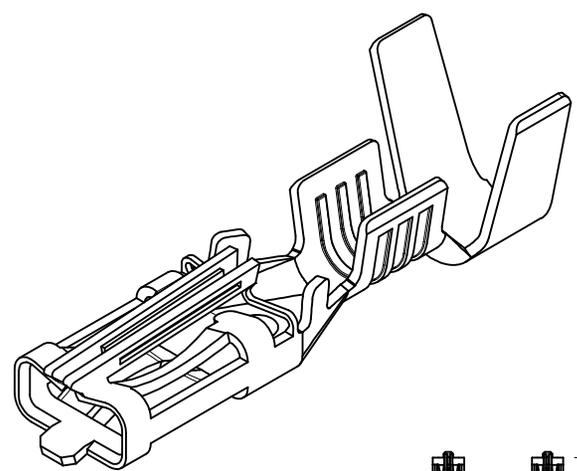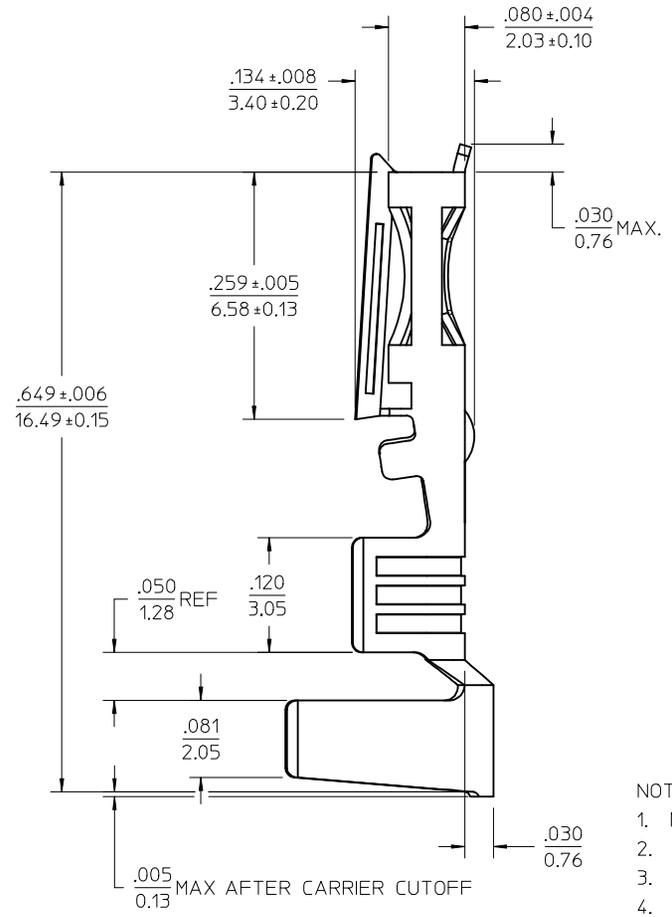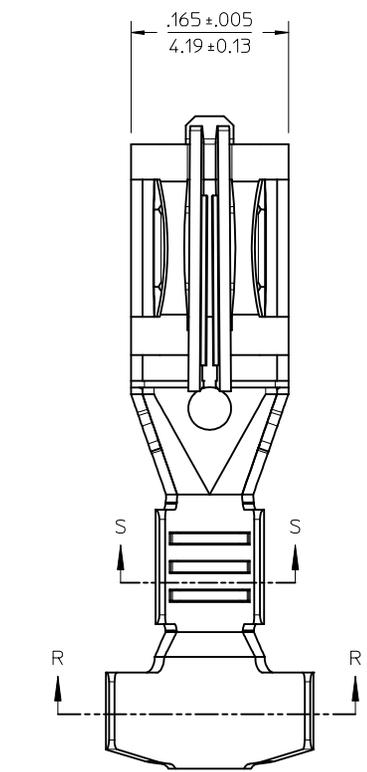

CARRIER STRIP PROGRESSION

- NOTES:
1. MATERIAL: BRASS
 2. FINISH: 20 MICRORINCH / (0.5 MICROMETER) MIN. PREPLATED HOT TIN DIP FINISH.
 3. PRODUCT SPECIFICATION: PS-43374-001.
 4. PACKAGING: TERMINALS WOUND ON 24" REELS WITH PAPER INTERLEAF, 3000 PER REEL.
 5. THIS TERMINAL INTENDED FOR USE WITH TWO 20 AWG STRANDED WIRES, UL STYLE 1007 OR 1015.
 6. TERMINAL MATES TO .125/3.18 WIDE X .020/0.51 THICK FLAT BLADE TERMINALS. MATING TERMINAL: 43178 SERIES
 7. SEE PRODUCT SPECIFICATION FOR INSULATOR HOUSINGS USED WITH TERMINAL.

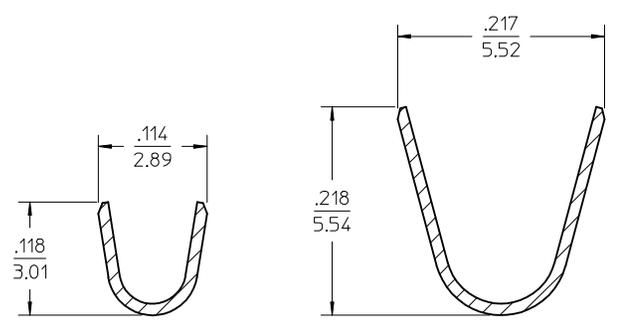

SECTION S-S
CONDUCTOR CRIMP

SECTION R-R
INSULATION CRIMP

CORRECT TOLERANCE EC NO: UCP2014-5466 DRWN:JDOX 2014/07/09 CHKD:ANDERSON 2014/07/09 APPR:FSMLTH 2014/07/17	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 10:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		
			mm	INCH	DRAWN BY BWIRKUS	DATE 1-25-2010	TITLE TERMINAL, FEM, 2X20 AWG FOR .125/(3.18) WIDE TAB W/O TPA; UL1007, 1015			
		4 PLACES ± --- ± ---			CHECKED BY BWIRUS	DATE 1-25-2010				
		3 PLACES ± --- ± .010			APPROVED BY APATEL	DATE 1-25-2010	molex			
2 PLACES ± 0.25 ± .014	ANGULAR ±1/2°		MATERIAL NO. 433745001	DOCUMENT NO. SD-43374-331		SHEET NO. 1 OF 1				
1 PLACE ± 0.35 ± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
0 PLACE ± --- ± ---	REV A2									