CMR1-02 CMR1-06 CMR1-04 CMR1-10

SURFACE MOUNT SILICON GENERAL PURPOSE RECTIFIERS 1.0 AMP, 200 THRU 1000 VOLT



www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMR1-02 series 1.0 Amp surface mount silicon rectifier is a highly reliable component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications.

MARKING CODE: SEE MARKING CODE TABLE ON FOLLOWING PAGE



FEATURES:

- Special selections available
- · High reliability
- · Glass passivated chip

• "C" bend construction provides strain relief when mounted on pc board

MAXIMUM RATINGS: (T_A=25°C unless otherwise noted)

	SYMBOL	CMR1-02	CMR1-04	CMR1-06	CMR1-10	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	200	400	600	1000	V
DC Blocking Voltage	V_{R}	200	400	600	1000	V
RMS Reverse Voltage	V _{R(RMS)}	140	280	420	700	V
Average Forward Current (T _A =75°C)	lo		1.	.0		Α
Peak Forward Surge Current, tp=8.3ms	IFSM		3	0		Α
Operating and Storage Junction Temperature	T _J , T _{stg}		-65 to	+175		°C
Thermal Resistance	$\Theta_{,\mathrm{II}}$		2	0		°C/W


SYMBOL	TEST CONDITIONS	MAX	UNITS
I_{R}	V_R =Rated V_{RRM}	10	μΑ
I_{R}	V _R =Rated V _{RRM} , T _A =125°C	50	μΑ
V_{F}	I _F =1.0A	1.1	V

CMR1-02 CMR1-06 CMR1-04 CMR1-10

SURFACE MOUNT SILICON GENERAL PURPOSE RECTIFIERS 1.0 AMP, 200 THRU 1000 VOLT



SMB CASE - MECHANICAL OUTLINE

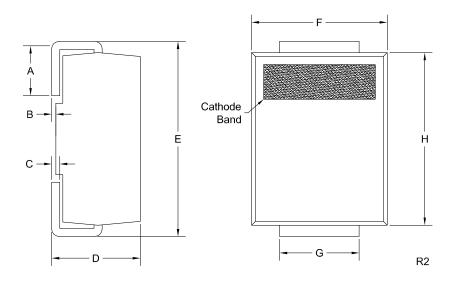

DEVICE	MARKING CODE		
CMR1-02	C02		
CMR1-04	C04		
CMR1-06	C06		
CMR1-10	C10		

DIMENSIONS						
	INCHES		MILLIMETERS			
SYMBOL	MIN	MAX	MIN	MAX		
Α	0.030	0.060	0.76	1.52		
В	0.000	0.008	0.00	0.20		
С	0.006	0.012	0.15	0.30		
D	0.086	0.096	2.18	2.44		
E	0.200	0.220	5.08	5.59		
F	0.130	0.150	3.30	3.81		
G	0.077	0.083	1.96	2.11		
Н	0.160	0.191	4.06	4.85		

SMB (REV: R2)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- · Inventory bonding
- · Consolidated shipping options

- · Custom bar coding for shipments
- · Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free guick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- · Custom electrical curves
- · Environmental regulation compliance
- · Customer specific screening
- · Up-screening capabilities

- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- · Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

- 1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
- 2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA

Main Tel: (631) 435-1110 Main Fax: (631) 435-1824

Support Team Fax: (631) 435-3388

www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

Worldwide Distributors:

www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms

www.centralsemi.com (001)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Central Semiconductor:

<u>CMR1-02 TR13</u> <u>CMR1-04M TR13</u> <u>CMR1-10M TR13</u> <u>CMR1-10 TR13</u> <u>CMR1-02M TR13</u> <u>CMR1-06M TR13</u> <u>CMR1-06M TR13</u> <u>CMR1-06 TR13</u> <u>CMR1-06 M BK</u> <u>CMR1-04 M BK</u> <u>CMR1-02 M BK</u> <u>CMR1-02 BK</u> <u>CMR1-06 BK</u> <u>CMR1-04 BK</u> <u>CMR1-04 BK</u> <u>CMR1-10 BK</u>