

Low Dropout Voltage Regulator


■ GENERAL DESCRIPTION

The NJU7250 series is low dropout voltage and high precision positive voltage regulator with ON/OFF control.

This IC is suitable for the battery items because of low operating current and 150mA output current.

Furthermore, this series is packaged with MTP5.

■ PACKAGE OUTLINE




NJU7250F

■ FEATURES

- Low Operating Current 35 μ A
- Output Current 150mA
- High Precision Output $V_o \pm 2\%$
- Low Dropout Voltage 0.2V typ. @ $I_o=100\text{mA}$, $2.8 \leq V_o \leq 3.3\text{V}$
- Standby Function Active High
- Short Current Protection
- C-MOS Technology
- Package Outline SOT-23-5

■ PIN CONFIGURATION




NJU7250F

Pin Function

1. V_{IN}
2. GND
3. STB(Active High)
4. NC
5. V_{OUT}

■ EQUIVALENT CIRCUIT

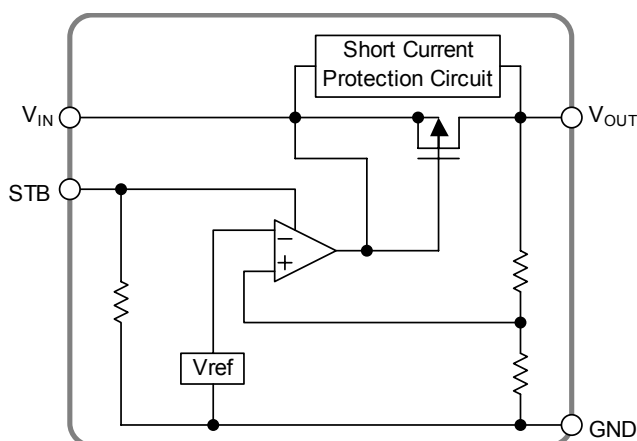

NJU7250

■ OUTPUT VOLTAGE RANK LIST

Device Name	Output Voltage
NJU7250F25	2.5V
NJU7250F27	2.7V
NJU7250F28	2.8V
NJU7250F29	2.9V
NJU7250F30	3.0V
NJU7250F32	3.2V
NJU7250F33	3.3V

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	+9	V
Control Voltage	V_{CONT}	GND-0.3~ $V_{IN}+0.3$	V
Output Voltage	V_O	GND-0.3~ $V_{IN}+0.3$	V
Output Current	I_O	200	mA
Power Dissipation	P_D	250(*1)	mW
		500(*2)	
Operating Temperature	T_{opr}	- 40~+85	°C
Storage Temperature	T_{stg}	- 40~+150	°C

(*1): Device itself.

(*2): Mounted on glass epoxy board based on EIA/JEDEC. (114.3x76.2x1.6mm: 2Layers)

■ ELECTRICAL CHARACTERISTICS ($C_{IN}=0.1\mu F$, $C_O=2.2\mu F$, $T_a=25^\circ C$)

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Output Voltage	V_O	$V_{IN} = V_O + 1V$, $1mA \leq I_O \leq 30mA$	-2.0%	-	+2.0%	V
Output Current	I_O	$1.5 \leq V_O \leq 1.7$, $V_{IN} = V_O + 1V$	100	-	-	mA
		$1.8 \leq V_O \leq 5.0$, $V_{IN} = V_O + 1V$	150	-	-	
Dropout Voltage	ΔV_{IO}	$2.5 \leq V_O \leq 2.7$, $I_O = 100mA$	-	0.24	0.35	
		$2.8 \leq V_O \leq 3.3$, $I_O = 100mA$	-	0.20	0.30	
Operating Current	I_Q	$V_{IN} = V_O + 1V$, $V_{CONT(ON)} = V_{IN}$	-	35	70	μA
Standby Current	$I_{Q(OFF)}$	$V_{IN} = V_O + 1V$, $V_{CONT(OFF)} = GND$	-	0.1	1.0	μA
Load Regulation	$\Delta V_O / \Delta I_O$	$V_{IN} = V_O + 1V$, $1mA \leq I_O \leq 80mA$	-	12	40	mV
Line Regulation	$\Delta V_O / (\Delta V_{IN} \cdot V_O)$	$V_{IN} = V_O + 0.5V \sim 8V$, $I_O = 30mA$	-	0.05	0.20	%/V
Output Voltage Temperature Coefficient	$\Delta V_O / \Delta T$	$-40 \leq T_a \leq +85^\circ C$, $I_O = 10mA$	-	± 100	-	ppm/°C
Input Voltage	V_{IN}		-	-	8	V
Short Current Limit	I_{LIM}	$V_O = 0V$	-	50	-	mA
Pull-down Resistance	RPD		2.5	5	10	M Ω
H Level Control Voltage	$V_{CONT(ON)}$		1.5	-	V_{IN}	V
L Level Control Voltage	$V_{CONT(OFF)}$		0	-	0.25	V
Output Noise Voltage	V_{NO}	$f=10Hz$	-	30	-	$\mu V/rms$

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJU7250F32-TE1](#) [NJU7250F28-TE1](#) [NJU7250F30-TE1](#) [NJU7250F33-TE1](#) [NJU7250F27-TE1](#) [NJU7250F25-TE1](#)
[NJU7250F29-TE1](#)