

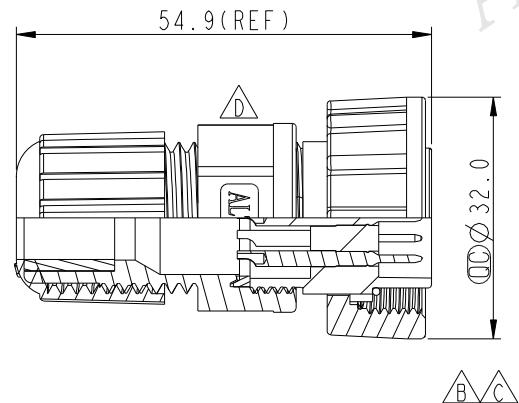




1	2	3	4	5	6	7	8	
F	E	D	C	REV.	ECN NO.	DATE	SIGN	DESCRIPTION
				B		2007/02/08	ZangXiaoRong	Change 18.0 to 18.5mm.
				C	LENIIC0005	2011/11/30	Vicky	REF. TO ECR/N.NOTE.
				D	LENI580257	2015/04/28	Jinhai	Change Logo

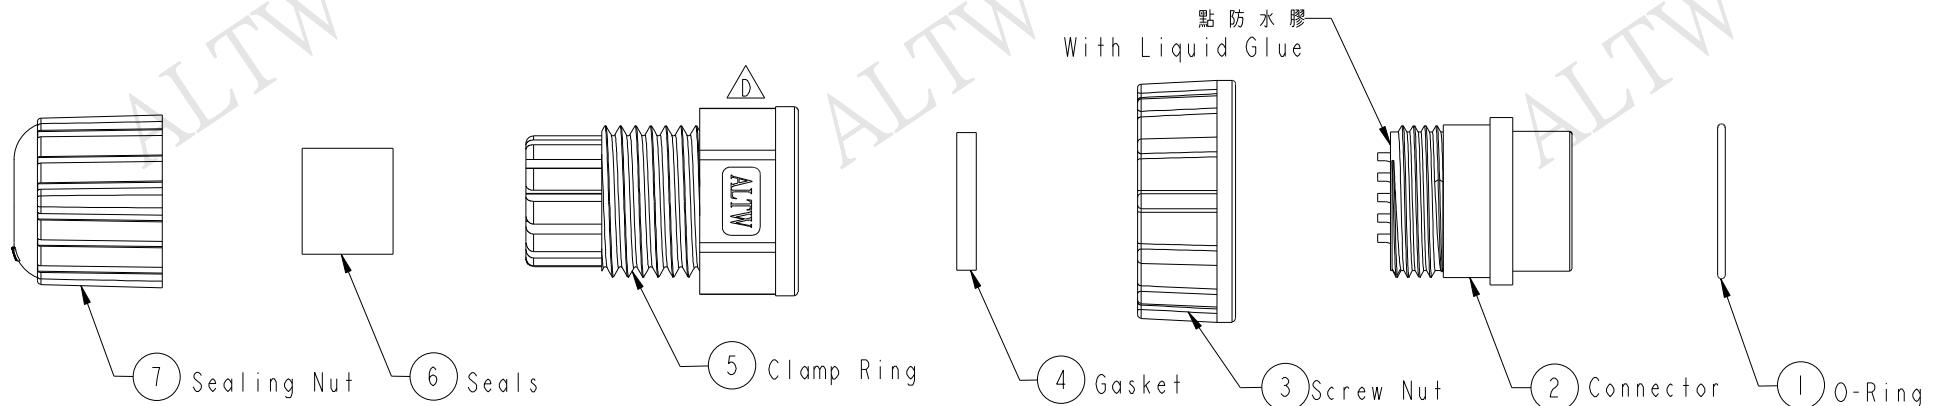

Pin Assignments
Front View 前視圖

Note:

- * (D) Important Dimension.
- * (C) Waterproof Rate: IP67
- * Connector: Nylon+GF, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * Ring: EPDM, Black
- * Screw Nut: Nylon+GF, Black.
- * Gasket: Black, Silicone
- * Clamp Ring: Black, Nylon+GF
- * Seals: EPDM, Black.
- * Sealing Nut: Nylon, Black.
- * Seals For Cable OD: Ø5.5mm~10.8mm
(防水墊圈線徑:)Ø5.5mm~10.8mm
- * One Set Unassembled in One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)

UNIT:mm		
TOLERANCE	±0.25	
.X	±0.1	
.XX	±0.05	
.XXX	±0.05	
ANGLES	±1°	

TITLE: Screw Type Conn. For Field Installation 180° 18Pin Female Connector Male Pin(5A)			
SCALE	SIZE	SHEET	OF
1:1	A4	1	1
REV. D	WC-REV. A.2	(QC): Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DD-18BFMA-SL7001	DRAWN BY	Jinhai	DATE	2015-04-28
DWG NO	DD-18BFMA-SL7001	CHECKED BY	Tom	DATE	2015-04-28
CUSTOMER	ALTW	APPROVED BY	Jerry	DATE	2015-04-28

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[DD-18BFMA-SL7001](#)