


**SERIES: VYB10W-T | DESCRIPTION: DC-DC CONVERTER**
**FEATURES**

- chassis mount with screw terminal connectors
- up to 10 W output
- compact size
- 4:1 input range (9 ~ 36 V, 18 ~ 72 V)
- single and dual outputs
- 1,500 V isolation
- short circuit protection
- wide temperature operation (-40 ~ 85°C)
- efficiency up to 83%



| MODEL                        | input voltage range (Vdc) | output voltage (Vdc) | output current |          | output power max (W) | ripple <sup>1</sup> max (mVp-p) | noise <sup>1</sup> max (mVp-p) | efficiency typ (%) |
|------------------------------|---------------------------|----------------------|----------------|----------|----------------------|---------------------------------|--------------------------------|--------------------|
|                              |                           |                      | min (mA)       | max (mA) |                      |                                 |                                |                    |
| VYB10W-Q24-S3-T <sup>2</sup> | 9 ~ 36                    | 3.3                  | 240            | 2,400    | 8                    | 50                              | 150                            | 76                 |
| VYB10W-Q24-S5-T              | 9 ~ 36                    | 5                    | 200            | 2,000    | 10                   | 50                              | 150                            | 79                 |
| VYB10W-Q24-S12-T             | 9 ~ 36                    | 12                   | 83             | 833      | 10                   | 50                              | 150                            | 81                 |
| VYB10W-Q24-S15-T             | 9 ~ 36                    | 15                   | 67             | 666      | 10                   | 50                              | 150                            | 82                 |
| VYB10W-Q24-D5-T              | 9 ~ 36                    | ±5                   | ±100           | ±1,000   | 10                   | 50                              | 150                            | 80                 |
| VYB10W-Q24-D12-T             | 9 ~ 36                    | ±12                  | ±42            | ±416     | 10                   | 50                              | 150                            | 82                 |
| VYB10W-Q24-D15-T             | 9 ~ 36                    | ±15                  | ±33            | ±333     | 10                   | 50                              | 150                            | 83                 |
| VYB10W-Q48-S3-T <sup>2</sup> | 18 ~ 72                   | 3.3                  | 240            | 2,400    | 8                    | 50                              | 150                            | 77                 |
| VYB10W-Q48-S5-T <sup>2</sup> | 18 ~ 72                   | 5                    | 200            | 2,000    | 10                   | 50                              | 150                            | 78                 |
| VYB10W-Q48-S12-T             | 18 ~ 72                   | 12                   | 83             | 833      | 10                   | 50                              | 150                            | 82                 |
| VYB10W-Q48-S15-T             | 18 ~ 72                   | 15                   | 67             | 666      | 10                   | 50                              | 150                            | 83                 |
| VYB10W-Q48-D5-T <sup>2</sup> | 18 ~ 72                   | ±5                   | ±100           | ±1,000   | 10                   | 50                              | 150                            | 78                 |
| VYB10W-Q48-D12-T             | 18 ~ 72                   | ±12                  | ±42            | ±416     | 10                   | 50                              | 150                            | 82                 |
| VYB10W-Q48-D15-T             | 18 ~ 72                   | ±15                  | ±33            | ±333     | 10                   | 50                              | 150                            | 83                 |

Notes: 1. Ripple and noise are measured at 20 MHz BW with 10µF tantalum capacitor and 1µF ceramic capacitor across output  
2. PWM mode, others PFM mode

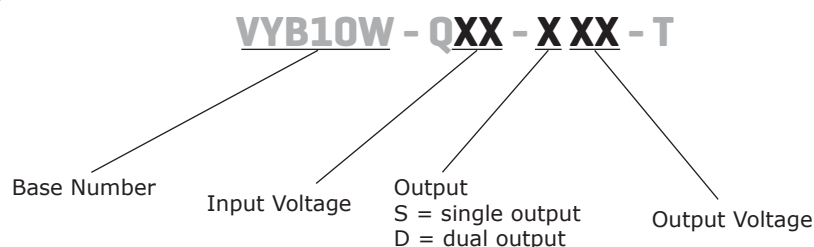**PART NUMBER KEY**


## INPUT

| parameter               | conditions/description | min | typ | max | units |
|-------------------------|------------------------|-----|-----|-----|-------|
| operating input voltage |                        | 9   | 24  | 36  | Vdc   |
|                         |                        | 18  | 48  | 72  | Vdc   |

## OUTPUT

| parameter               | conditions/description   | min | typ  | max             | units |
|-------------------------|--|-----|------|-----------------|-------|
| line regulation         | measured from low line to high line  |     | ±0.2 | ±0.5            | %     |
| load regulation         | measured from 10% to full load   |     | ±0.5 | ±1 <sup>1</sup> | %     |
| voltage accuracy        | positive, refer to recommended circuit<br>negative, refer to recommended circuit |     | ±1   | ±3              | %     |
|                         |  |     | ±3   | ±5              | %     |
| switching frequency     | 100% load, input voltage range   |     | 300  |                 | kHz   |
| temperature coefficient |  |     |      | ±0.03           | %/°C  |

Notes: 1. Dual output models unbalanced load: ±5%

## PROTECTIONS

| parameter                | conditions/description         | min | typ | max | units |
|--------------------------|--------------------------------|-----|-----|-----|-------|
| short circuit protection | continuous, automatic recovery |     |     |     |       |

## SAFETY AND COMPLIANCE


| parameter             | conditions/description           | min       | typ   | max | units |
|-----------------------|----------------------------------|-----------|-------|-----|-------|
| isolation voltage     | tested for 1 minute at 1 mA max. | 1,500     |       |     | Vdc   |
| isolation resistance  | at 500 Vdc                       | 1,000     |       |     | MΩ    |
| isolation capacitance | input to output, 100 kHz / 1 V   |           | 1,000 |     | pF    |
| RoHS compliant        | yes                              |           |       |     |       |
| MTBF                  |                                  | 1,000,000 |       |     | hours |

## ENVIRONMENTAL

| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | see derating curve     | -40 |     | 100 | °C    |
| storage temperature   |                        | -55 |     | 125 | °C    |
| storage humidity      | non-condensing         |     |     | 95  | %     |
| temperature rise      | 100% load              |     | 40  |     | °C    |

## DERATING CURVES

output power vs. ambient temperature

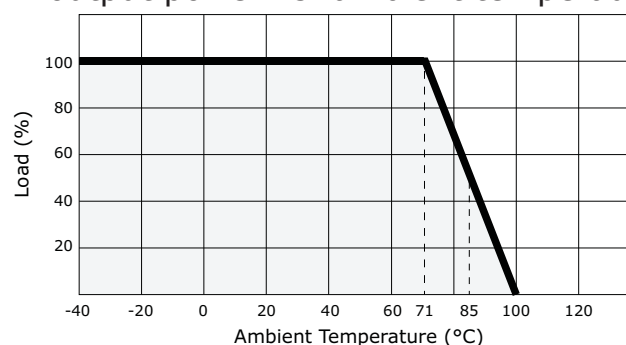

## MECHANICAL



| parameter     | conditions/description                       | min | typ | max | units |
|---------------|--|-----|-----|-----|-------|
| dimensions    | 55.0 x 52.3 x 19.1 (2.17 x 2.06 x 0.75 inch) |     |     |     | mm    |
| case material | aluminum                                     |     |     |     |       |
| weight        |  |     | 50  |     | g     |

## MECHANICAL DRAWING

units: mm [inch]

tolerance:  $\pm 0.5$  [ $\pm 0.020$ ] unless otherwise specified

screw terminals: Degson Electronics terminal block part number DG301-5.0-04P-12 or equivalent (4 pin, M2.5 screw) 5.0 mm spacing DIN rail mounting kit available (part # STK-DIN)

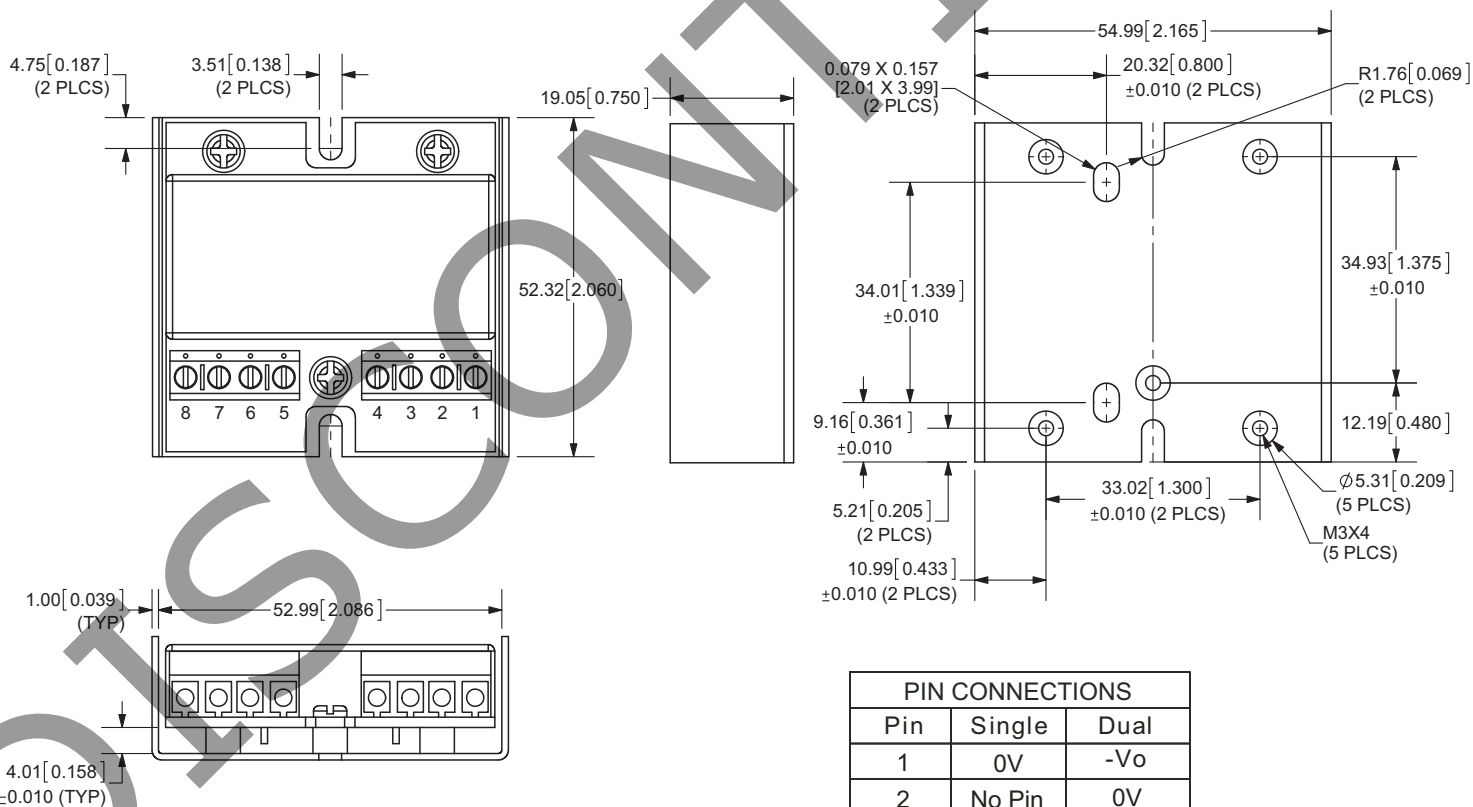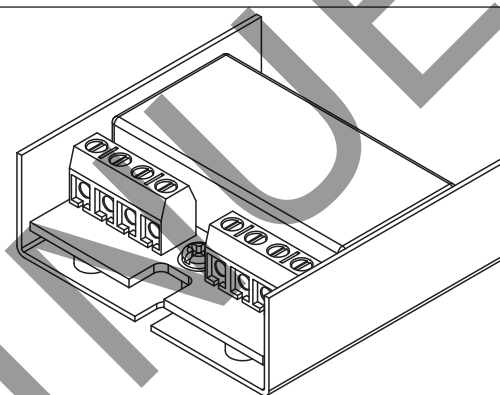

| PIN CONNECTIONS |        |        |
|-----------------|--------|--------|
| Pin             | Single | Dual   |
| 1               | 0V     | -Vo    |
| 2               | No Pin | 0V     |
| 3               | +Vo    | +Vo    |
| 4               | No Pin | No Pin |
| 5               | Case   | Case   |
| 6               | No Pin | No Pin |
| 7               | Vin    | Vin    |
| 8               | GND    | GND    |


## APPLICATION NOTES

### 1. Requirement on Output Load

In order to ensure the product operates efficiently and reliably, make sure the specified range of input voltage is not exceeded and the minimum output load is not less than 10% load. If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading.

### 2. Recommended Circuit

The VYB10W series has been tested according to the following recommended testing circuit. This series should be tested under load. (see Figure 1)

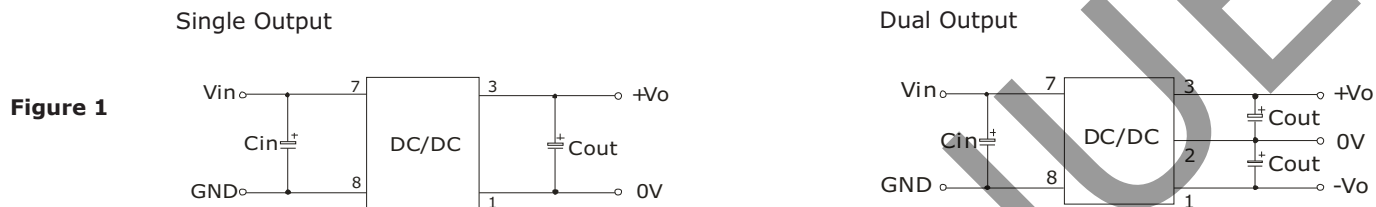

If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. If the capacitance is too big, a startup problem might arise. The maximum allowable capacitance to ensure safe and reliable operation is listed in Table 1.

General:

Cin: 10 ~ 47  $\mu$ F  
 Cout: 10  $\mu$ F / 100 mA

Table 1

| Single Vout (Vdc) | Cout ( $\mu$ F) | Dual Vout (Vdc) | Cout ( $\mu$ F) |
|-------------------|-----------------|-----------------|-----------------|
| 3.3               | 2,200           | --              | --              |
| 5                 | 1,000           | $\pm$ 5         | 680             |
| 12                | 470             | $\pm$ 12        | 330             |
| 15                | 330             | $\pm$ 15        | 220             |

### 3. Input Current

When using an unstable power source, please ensure the output voltage and ripple voltage do not exceed indexes of the converter. The preceding power source must be able to provide for converter sufficient starting current  $I_p$ .

General:  $I_p \leq 1.6 * I_{in-max}$




Figure 2

Notes: 1. Operation under minimum load will not damage the converter; however, they may not meet all specifications listed.  
 2. All specifications measured at:  $T_a=25^\circ\text{C}$ , humidity<75%, nominal input voltage and rated output load, unless otherwise specified.  
 3. No parallel connection

## REVISION HISTORY

| rev. | description                                 | date       |
|------|---|------------|
| 1.0  | initial release                             | 08/08/2011 |
| 1.01 | V-Infinity branding removed                 | 08/29/2012 |
| 1.02 | removed on/off control option, updated spec | 04/05/2013 |

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.