
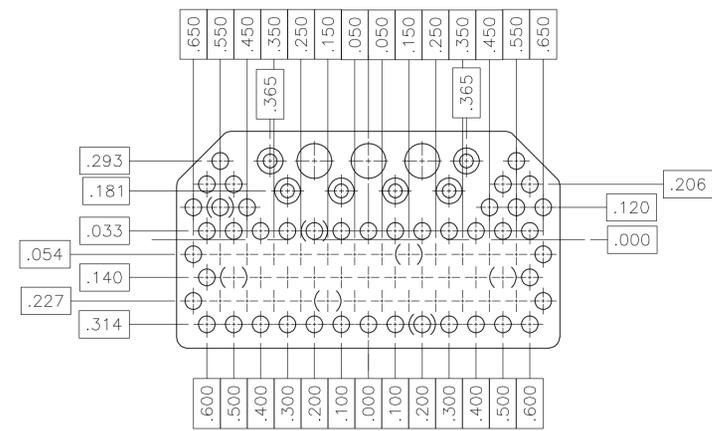


FEMALE JACKSCREW
 #10-24, DOUBLE LEAD
 THREAD, SELF-LOCKING

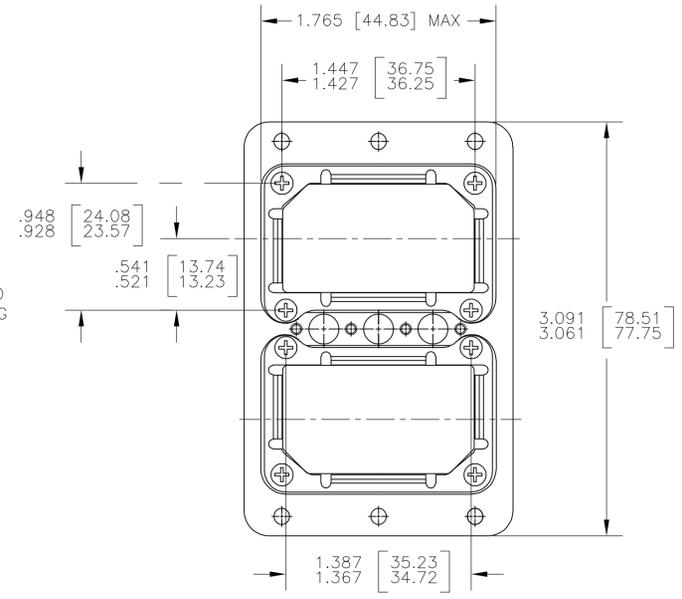

- INDICATES SIZE 22 CAVITIES (79 PLACES)
- ⊙ INDICATES SIZE 20 CAVITIES (6 PLACES)
- INDICATES SIZE 16 CAVITIES (3 PLACES)

	INSERT ARRANGEMENT														
	C2	C3	8	C8	D8	26	32C2	33C4	40	40C1	45	57	67	88	106
A MAX	1.076 [27.33]	1.076 [27.33]	1.525 [38.74]	1.512 [38.40]	1.525 [38.74]	1.525 [38.74]	1.700 [43.18]	1.700 [43.18]	1.474 [37.44]	1.700 [43.18]	1.525 [38.74]	1.525 [38.74]	1.525 [38.74]	1.598 [40.59]	1.279 [32.49]
E MAX	1.076 [27.33]	1.076 [27.33]	1.450 [36.83]	1.076 [27.33]	1.450 [36.83]	1.450 [36.83]	1.450 [36.83]	1.450 [36.83]	1.450 [36.83]	1.450 [36.83]	1.450 [36.83]	1.450 [36.83]	1.450 [36.83]	1.450 [36.83]	1.230 [31.24]

"B" \triangle 4				"C"				"D" \triangle 4			
22	20	16	12	22	20	16	12	22	20	16	12
.238 [6.04]	.170 [4.32]	.205 [5.21]	.205 [5.21]	.175 [4.45]	.081 [2.06]	.081 [2.06]	.081 [2.06]	.250 [6.35]	.346 [8.79]	.165 [4.19]	.165 [4.19]
.192 [4.88]	.115 [2.92]	.148 [3.71]	.148 [3.71]	.137 [3.48]	.048 [1.22]	.048 [1.22]	.048 [1.22]	.205 [5.21]	.241 [6.12]	.104 [2.64]	.104 [2.64]

1 MATERIAL & FINISH
 SHELL: DIE CAST ALUM. ALLOY PER FED SPEC QQ-A-591
 FINISH: CAD. PLATED PER QQ-P-416, TYPE 1, CLASS 2
 YELLOW CHROMATE CONVERSION.
 INSULATOR, HARD: EPOXY PER MIL-M-24325.
 INSULATOR, SOFT: FLUOROSILICONE RUBBER, COLOR: BLUE.
 GROMMET PROTECTOR: ALUM. ALLOY, FINISH: BLUE EPOXY.
 SCREWS AND WASHERS: STAINLESS STEEL, PASSIVATE
 JACKSCREW: STAINLESS STEEL
 POLARIZING SCREWS: STAINLESS STEEL
 POLARIZING KEYS: ALUMINUM ALLOY
 FINISH: CAD PLATE PER QQ-P-416 TYPE 1,
 CLASS 2, YELLOW CHROMATE CONVERSION
 DUST CAP: CLEAR VINYL

2 CONTACTS SHOWN IN POSITION FOR ILLUSTRATION ONLY, ARE INCLUDED IN A CONTAINER WITHIN CONNECTOR PACKAGE FOR SHIPMENT.

3. CONNECTOR MEETS AMP PRODUCT SPEC 108-10,019.

4 FOR CONTACT SIZE 22 DIMENSION "B" REPRESENTS PIN CONTACTS & DIMENSION "D" REPRESENTS SOCKET CONTACTS.

5. ALL METRIC DIMENSIONS ARE SHOWN IN PARENTHESIS.

6. FOR MATING CONNECTOR SEE 211027.

PART NO.	ARRANGEMENT	
	MODULE A	MODULE B
211026-1	88P	88P

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN TERESA HECK 4-2-82	Tyco Electronics Corporation Harrisburg, PA 17105-3608
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	CHK L LAWYER 4-27-82	
MATERIAL	FINISH	APVD L LAWYER 4-27-82	NAME RECEPTACLE CONNECTOR INSTALLATION (WITH CENTER FEMALE JACKSCREW)
		SIZE A1 CASE CODE 00779 DRAWING NO. C=211026	RESTRICTED TO
		CUSTOMER DRAWING	SCALE 1:1 SHEET 1 OF 1 REV D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[211026-1](#)