


LOC		DIST		REVISIONS				
AD	39	P	LTR	DESCRIPTION	DATE	DWN	APVD	
			0	RELEASED	12-NOV-96	EB	GD	

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [0.000015] GOLD ON CONTACT AREA, OVER 0.00127 [0.000050] NICKEL, ENTIRE POST.

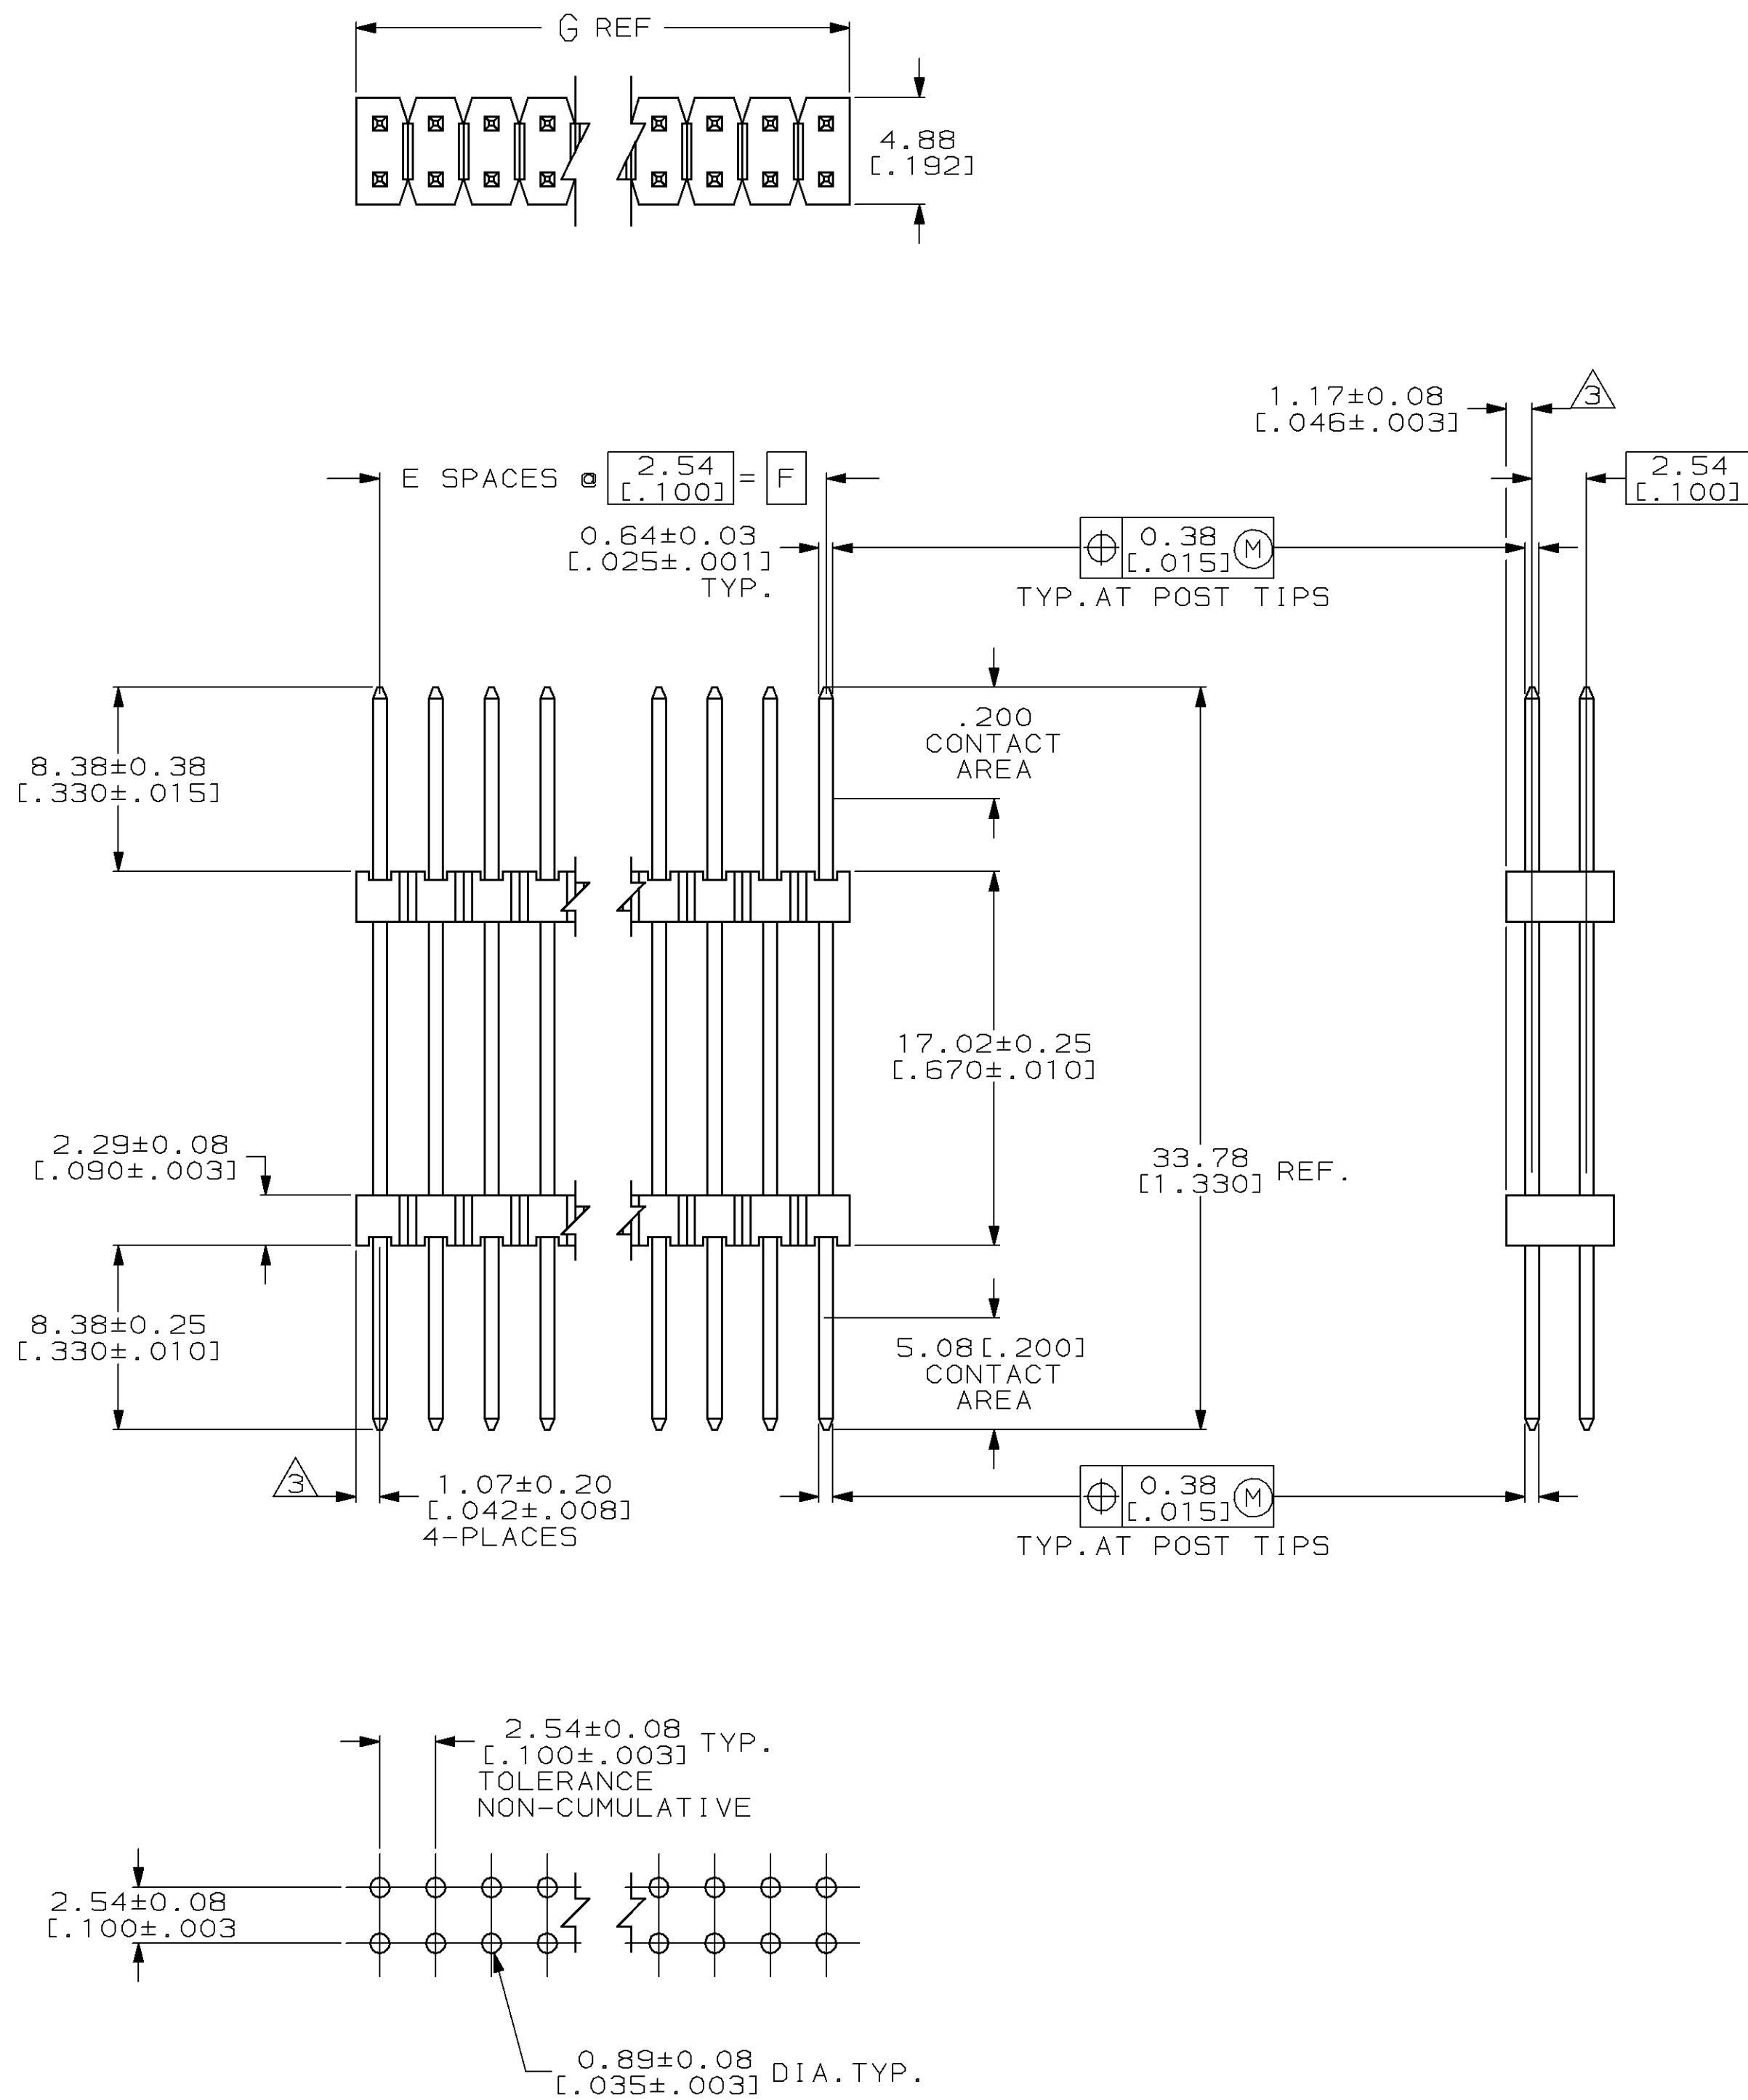

01.19	99.06	39	80	4-146507-0
[3.984]	[3.900]			
98.65	96.52	38	78	3-146507-9
[3.884]	[3.800]			
96.11	93.98	37	76	3-146507-8
[3.784]	[3.700]			
93.57	91.44	36	74	3-146507-7
[3.684]	[3.600]			
91.03	88.90	35	72	3-146507-6
[3.584]	[3.500]			
88.49	86.36	34	70	3-146507-5
[3.484]	[3.400]			
85.95	83.82	33	68	3-146507-4
[3.384]	[3.300]			
83.41	81.28	32	66	3-146507-3
[3.284]	[3.200]			
80.87	78.74	31	64	3-146507-2
[3.184]	[3.100]			
78.33	76.20	30	62	3-146507-1
[3.084]	[3.000]			
75.79	73.66	29	60	3-146507-0
[2.984]	[2.900]			
73.25	71.12	28	58	2-146507-9
[2.884]	[2.800]			
70.71	68.58	27	56	2-146507-8
[2.784]	[2.700]			
68.17	66.04	26	54	2-146507-7
[2.684]	[2.600]			
65.63	63.50	25	52	2-146507-6
[2.584]	[2.500]			
63.09	60.96	24	50	2-146507-5
[2.484]	[2.400]			
60.55	58.42	23	48	2-146507-4
[2.384]	[2.300]			
58.01	55.88	22	46	2-146507-3
[2.284]	[2.200]			
55.47	53.34	21	44	2-146507-2
[2.184]	[2.100]			
52.93	50.80	20	42	2-146507-1
[2.084]	[2.000]			
50.39	48.26	19	40	2-146507-0
[1.984]	[1.900]			
47.85	45.72	18	38	1-146507-9
[1.884]	[1.800]			
45.31	43.18	17	36	1-146507-8
[1.784]	[1.700]			
42.77	40.64	16	34	1-146507-7
[1.684]	[1.600]			
40.23	38.10	15	32	1-146507-6
[1.584]	[1.500]			
37.69	35.56	14	30	1-146507-5
[1.484]	[1.400]			
35.15	33.02	13	28	1-146507-4
[1.384]	[1.300]			
32.61	30.48	12	26	1-146507-3
[1.284]	[1.200]			
30.07	27.94	11	24	1-146507-2
[1.184]	[1.100]			
27.53	25.40	10	22	1-146507-1
[1.084]	[1.000]			
24.99	22.86	9	20	1-146507-0
[.984]	[.900]			
22.45	20.32	8	18	146507-9
[.884]	[.800]			
19.91	17.78	7	16	146507-8
[.784]	[.700]			
17.37	15.24	6	14	146507-7
[.684]	[.600]			
14.83	12.70	5	12	146507-6
[.584]	[.500]			
12.29	10.16	4	10	146507-5
[.484]	[.400]			
9.75	7.62	3	8	146507-4
[.384]	[.300]			
7.21	5.08	2	6	146507-3
[.284]	[.200]			
4.67	2.54	1	4	146507-2
[.184]	[.100]			
2.13	-	-	2	146507-1
[.084]	-			
G	F	E	NO. OF POSITIONS	PART NUMBER

[illegible]

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[146507-2](#)