


HONEYWELL
PART NUMBER
64AT34 SERIES CHART 2

REV	DOCUMENT	CHANGED BY	CHECK
8	0018728	LKM 17FEB06	VA

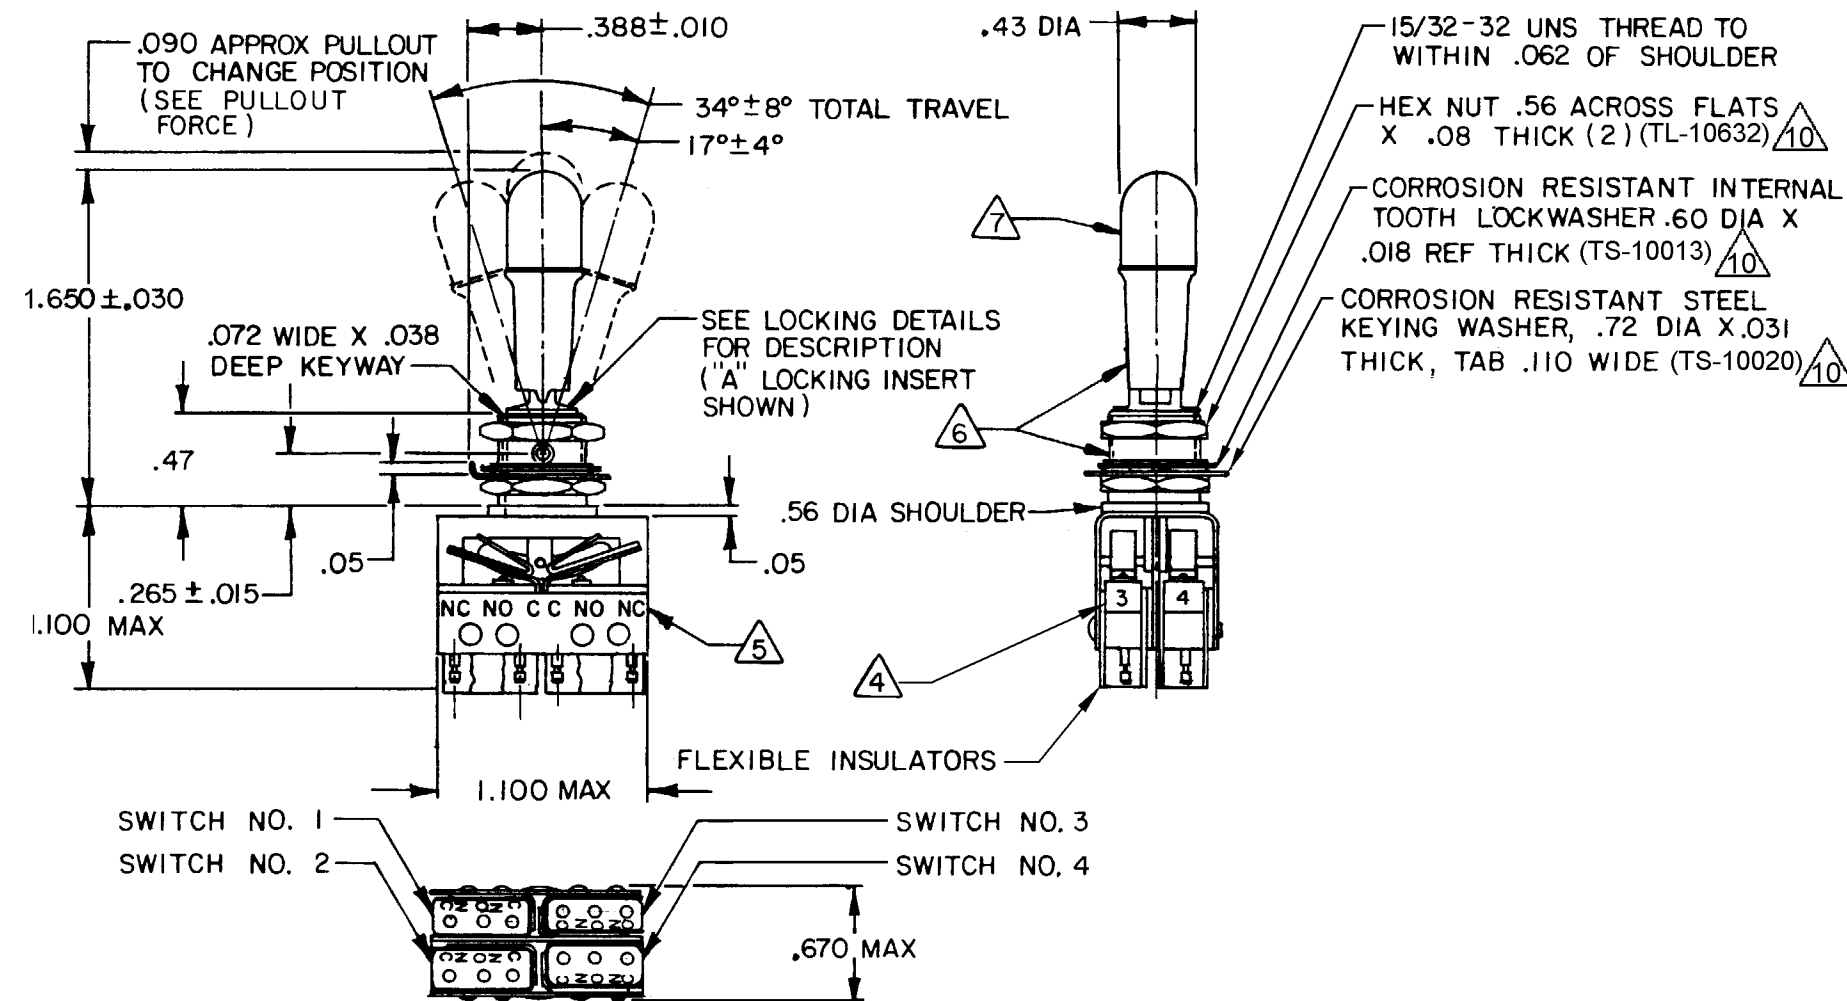

CATALOG LISTING	KEYWAY POSITION		CENTER POSITION		OPPOSITE KEYWAY POSITION		RECOMMENDED LOCKING COMBINATIONS
	C-NC	C-NO	C-NC	C-NO	C-NC	C-NO	
64AT34-1	1,2	3,4	ALL	NONE	3,4	1,2	A,B,D,E,F,G,H J,K,L,M,N,P
64AT34-3	1,2	3,4	NONE	NONE	3,4	1,2	D,F,G
64AT34-5	1,2*	3,4*	ALL	NONE	3,4	1,2	E,F,K,L,M,N
64AT34-7	1,2*	3,4*	ALL	NONE	3,4*	1,2*	E,L,N
64AT34-514	1,2	3,4	ALL	NONE	3,4*	1,2*	B,E,G,L,N,P

* ASTERISK DENOTES MOMENTARY POSITION

CAT. LISTING	"A"	"B"	"D"	"E"
64AT34-1A				
64AT34-1B				
64AT34-1D				
64AT34-1E				
64AT34-1F				
64AT34-1G				
64AT34-1H				
64AT34-1J				
64AT34-1K				
64AT34-1L				
64AT34-1M				
64AT34-1N				
64AT34-1P				
64AT34-3D FAA-PMA				
64AT34-3F				
64AT34-3G				
64AT34-5E				
64AT34-5F				
64AT34-5K				
64AT34-5L				
64AT34-5M				
64AT34-5N				
64AT34-7E				
64AT34-7L				
64AT34-7N				
64AT34-514B				
64AT34-514E				
64AT34-514G				
64AT34-514L				
64AT34-514N				
64AT34-514P				

- NOTES
- UNIT INCLUDES "23SX" TYPE (GOLD CONTACT) BASIC SWITCH (4) (MEETS REQUIREMENTS OF MIL-PRF-8805)
 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
 - PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES
 - SWITCH NUMBERS STAMPED ON END OF BASIC SWITCHES
 - TERMINAL DESIGNATION STAMPED ON BOTH SIDES OF UNIT
 - DULL FINISH ON LEVER AND BUSHING
 - FLAT WHITE RESILIENT SILICONE (50 DUROMETER APPROX)
 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING (SEE CHART FOR RECOMMENDED LOCKING COMBINATIONS)
 - FOR REPLACEMENT BUTTON SEE MICRO SWITCH CAT. LIST. 15PA90-6W
 - HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET 15PA313-AT PER MIL-PRF-8805
 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA313-AT
 - FOR MANUFACTURING DETAIL SEE THE CORRESPONDING ASSEMBLY DRAWING FOR EACH LISTING FOR FAA-PMA.

<table border="1"> <thead> <tr> <th>CHARACTERISTICS</th> <th>ELECTRICAL DATA</th> </tr> </thead> <tbody> <tr> <td>PULLOUT FORCE --- 3 LB MIN - 5 LB MAX</td> <td>CONTACT ARRANGEMENT S P D T (4)</td> </tr> <tr> <td></td> <td>30 VOLTS DC RATING</td> </tr> <tr> <td></td> <td>INDUCTIVE ---SEA LEVEL--- 1/2 AMP 50,000 FT --- 1/2 AMP</td> </tr> <tr> <td></td> <td>RESISTIVE ---SEA LEVEL--- 1 AMP 50,000 FT --- 1 AMP</td> </tr> <tr> <td></td> <td>MAXIMUM INRUSH --- 2 AMP</td> </tr> </tbody> </table>	CHARACTERISTICS	ELECTRICAL DATA	PULLOUT FORCE --- 3 LB MIN - 5 LB MAX	CONTACT ARRANGEMENT S P D T (4)		30 VOLTS DC RATING		INDUCTIVE ---SEA LEVEL--- 1/2 AMP 50,000 FT --- 1/2 AMP		RESISTIVE ---SEA LEVEL--- 1 AMP 50,000 FT --- 1 AMP		MAXIMUM INRUSH --- 2 AMP	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION	DRAWN SLB 21JUN82 CHECK CEB 28JUN82 THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY RASTER	Honeywell TITLE ASSEMBLY - TOGGLE SWITCH SIZE C TYPE I DRAWING NAME 64AT34 SERIES CHART 2 REV 8 SCALE FULL WEIGHT .09 LB EST SHEET 1 OF 1
	CHARACTERISTICS	ELECTRICAL DATA													
PULLOUT FORCE --- 3 LB MIN - 5 LB MAX	CONTACT ARRANGEMENT S P D T (4)														
	30 VOLTS DC RATING														
	INDUCTIVE ---SEA LEVEL--- 1/2 AMP 50,000 FT --- 1/2 AMP														
	RESISTIVE ---SEA LEVEL--- 1 AMP 50,000 FT --- 1 AMP														
	MAXIMUM INRUSH --- 2 AMP														