


New
BK210A
A size (HR17/50)

Old
(HHR210A)

Standard type



■ Dimensions (with tube)

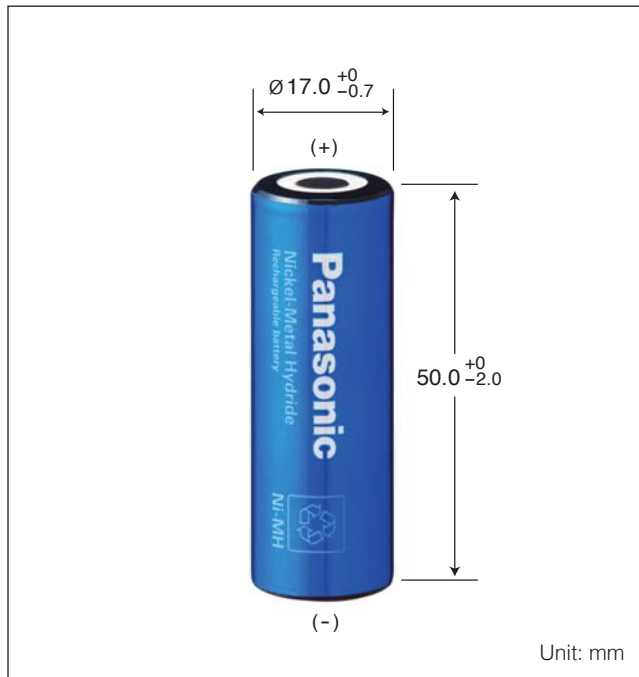


■ Specifications

Diameter	17.0 +0 / -0.7 mm
Height	50.0 +0 / -2.0 mm
Approximate Weight	38 g



Nominal Voltage		1.2 V	
Discharge Capacity	Average ^{*1}	2200 mAh	
	Rated (min.)	2100 mAh	
Approx. Internal impedance at 1000Hz at charged state.		20 mΩ	
Charge	Standard	210 mA X 16 hrs.	
	Rapid ^{*3}	2100 mA X 1.2 hrs.	
Ambient Temperature	Charge	Standard	0 °C to 45 °C
		Rapid	0 °C to 40 °C
	Discharge		-10 °C to 65 °C
	Storage	<1 year	-20 °C to 35 °C
<6 months		-20 °C to 45 °C	
<1 month		-20 °C to 55 °C	
<1 week		-20 °C to 65 °C	

*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It.
 *2 For reference only.
 *3 Need specially designed control system. Please contact Panasonic for details.

■ Typical charge characteristics

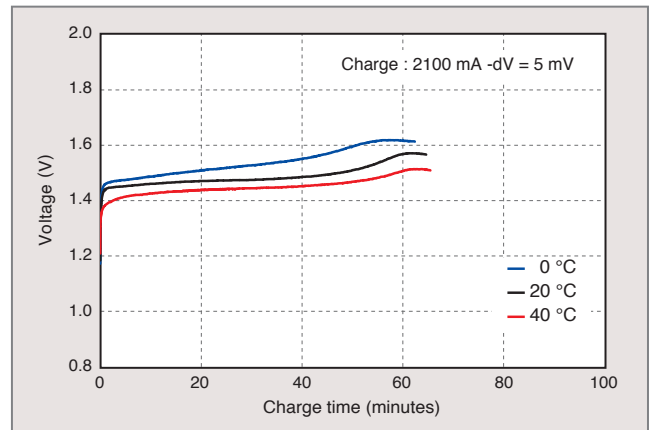

■ Typical discharge characteristics

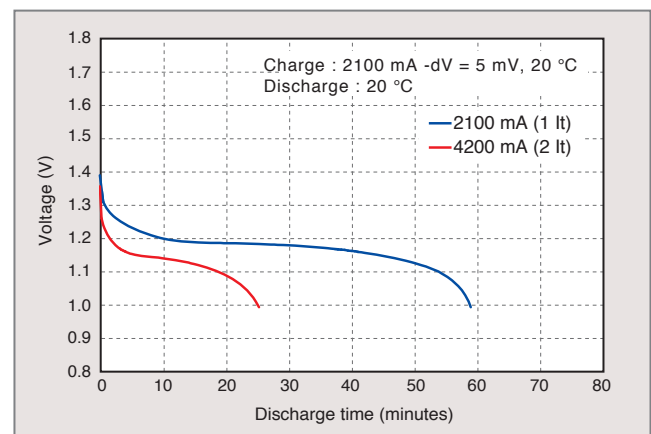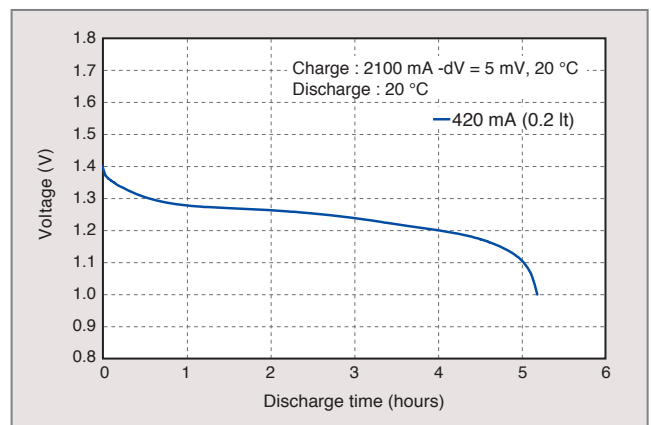

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panasonic:](#)

[HHR-210AB18](#) [HHR-210AHA01](#)