


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	2/0 STR/FLEX
Wire Type	Stranded Copper: Class B & C Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	1-9/16 in.
Stud Size	1/4 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BLACK
Panduit Die Index No. on Barrel	P45
Alternate Industry Die Index No. () on Barrel	(13)



Technical drawing of a Panduit 2/0 STR/FLEX LCBX2/0-14F cable. The drawing includes the following dimensions and labels:

- Overall Width:** $.96 \pm .04$
- Wire Inspection Window:** Indicated by a label pointing to the curved section on the right.
- Distance from Left Edge to Center:** $.35 \pm .04$
- Center Hole Diameter:** $.27 \pm .02$ DIA
- Text on Cable Body:** PANDUIT, 2/0 STR/FLEX, LCBX2/0-14F
- Bottom View Dimensions:**
 - Top Flange Width:** $.78 \pm .04$
 - Flange Thickness:** $.13 \pm .01$
 - Corner Radius:** $90^\circ \pm 5^\circ$
 - Reference Height 1:** 2.18 REF
 - Reference Height 2:** $1.50 \pm .04$
 - Reference Height 3:** $.51 \pm .01$
 - Reference Height 4:** $.64 \pm .01$
 - Reference Width:** 1.67 REF
 - Beveled Wire Entry:** Indicated by a label pointing to the beveled section on the right.

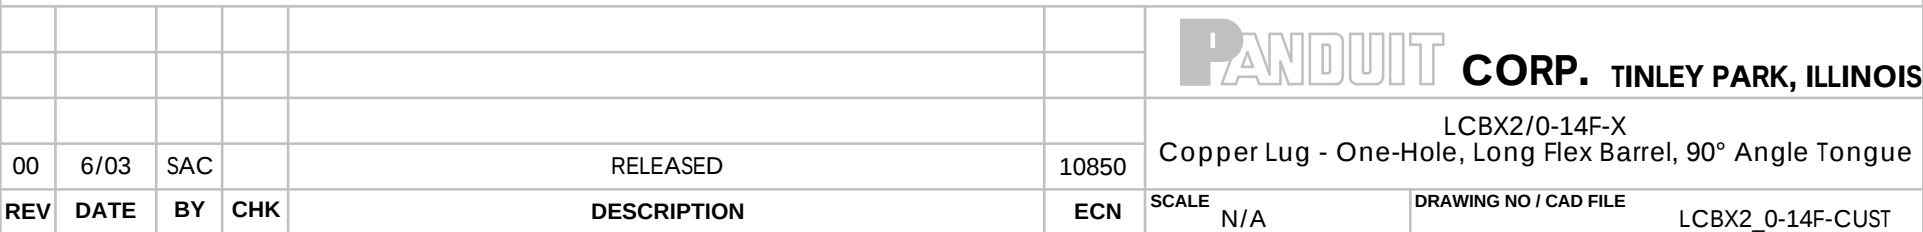

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCBX2/0-14F-X](#)