




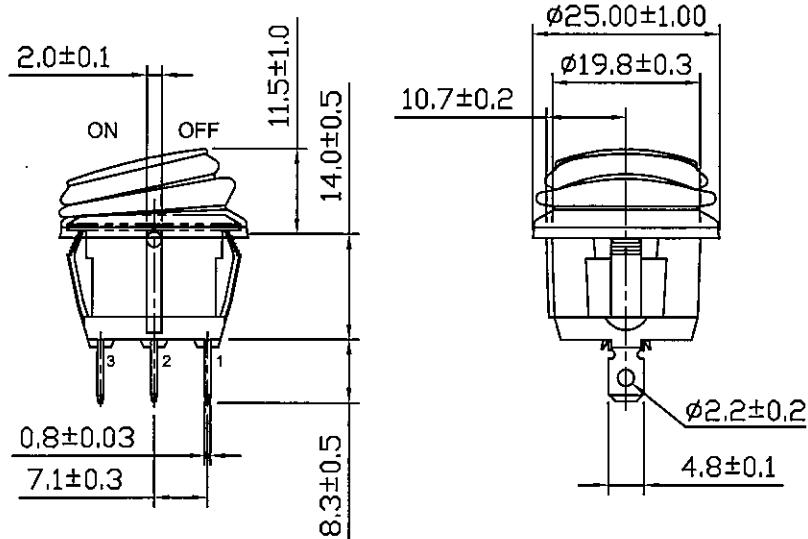
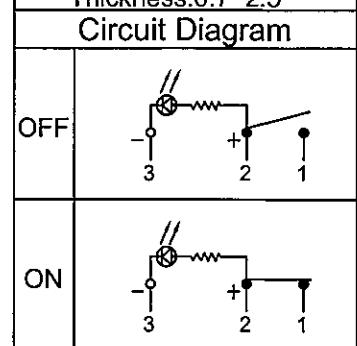


Rating	20A 14VDC	Mounting Hole	
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C ~ 85°C		
Switch Function	3P SPST ON-OFF (LED dependent)		

**\*MATERIAL:**

Frame: Nylon 66 (94-V2), Black  
 Actuator: PC (94-V2), Blue  
 Waterproof rubber: Silicone  
 Terminals: Silver plated, Copper alloy  
 Hot Stamping: None  
 Waterproof: IP65  
 LED color: Blue



C8\R13\R13-112B8-02(1823562)\_1

Date	Name	Description	NO
05/20/13	曹盈芳	依公司規定追加SCI Logo, 本體Rating改為20A 14VDC	△
Drawn	Checked	Approved	SCI BOM NO.
曹盈芳		王海山	Customer No.
05/20/13		5/20/13	Unit
		mm	Model Name: ROCKER SWITCH Model No: R13-112B8-02 Rev. 1 Shin Chin Industrial Co., Ltd.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Shin Chin:](#)

[R13-112B8W-02-BUU-L1](#)