

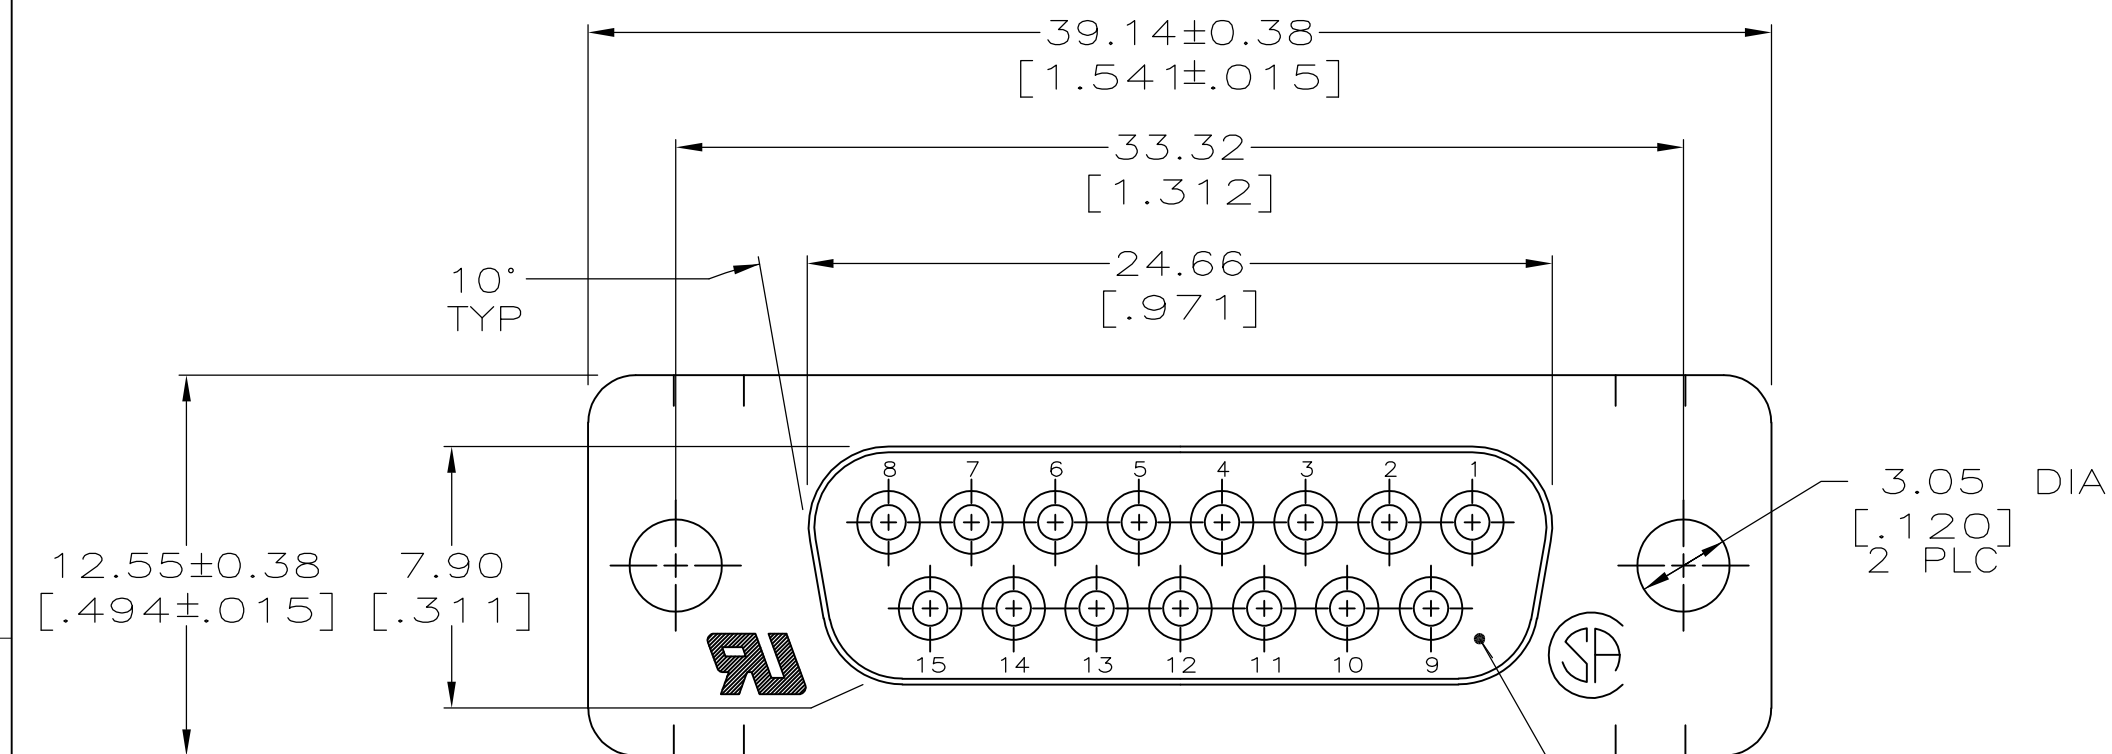


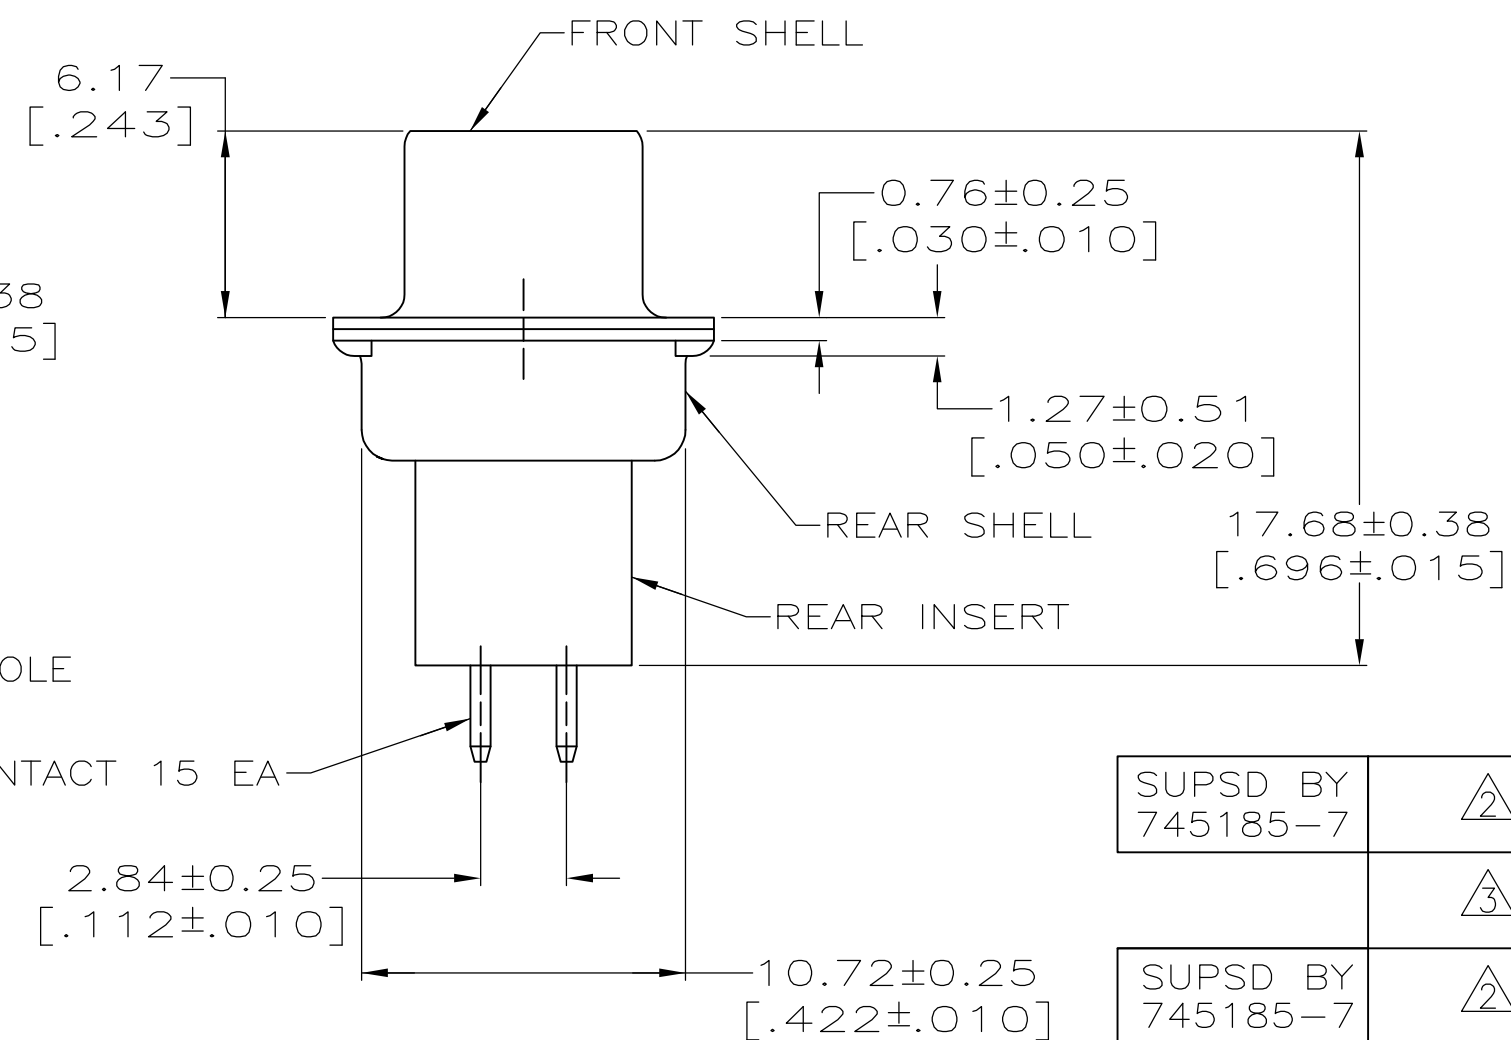


△ MOLDED PARTS: FLAME RETARDANT 94V-0 RATED THERMOPLASTIC; BLACK.
SHELLS: CARBON STEEL.
CONTACTS: PHOS BRONZE.

△ SHELLS: 5.08μm [.000200] MIN TIN OR TIN-LEAD OVER 2.54μm [.000100] MIN COPPER.
CONTACTS: GOLD FLASH ON MATING END, 2.54μm [.000100] MIN TIN-LEAD ON
SOLDER END, BOTH OVER 1.27μm[.000050] MIN NICKEL.

③ SHELLS: 5.08μm [.000200] MIN TIN OVER 2.54μm [.000100] MIN COPPER.
CONTACTS: 0.76μm [.000030] MIN GOLD ON MATING END, 2.54μm [.000100] MIN
TIN-LEAD ON SOLDER END, BOTH OVER 1.27μm [.000050] MIN NICKEL.
-OR-
GOLD FLASH OVER PALLADIUM-NICKEL 0.76μm [.000030] MIN TOTAL ON
MATING END, 2.54μm [.000100] MIN TIN-LEAD ON SOLDER END, BOTH
OVER 1.27μm [.000050] MIN NICKEL.

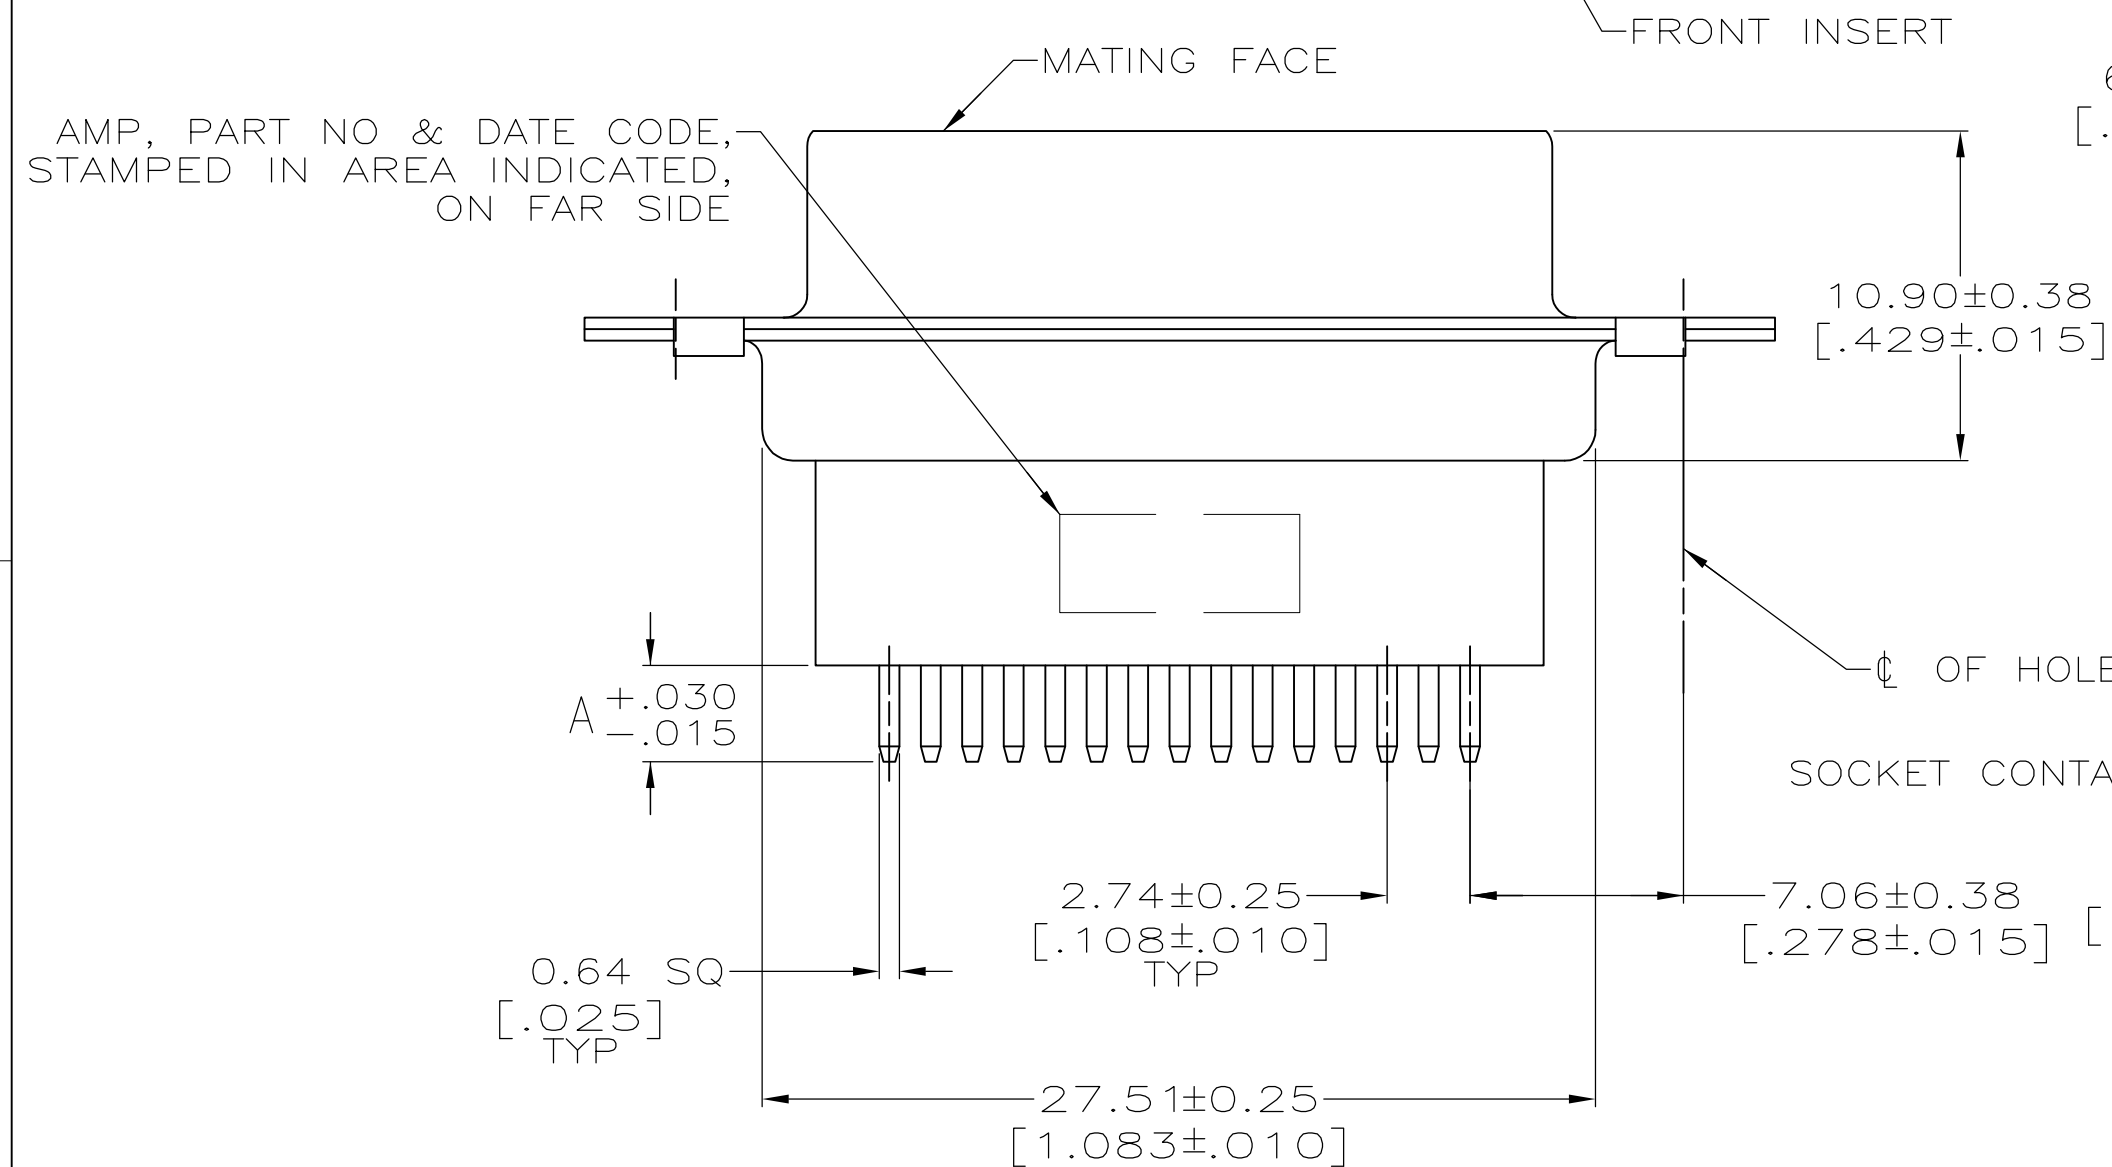

SUPSD BY 745185-7		4.78 [.188]	745185-8
		4.78 [.188]	745185-7
SUPSD BY 745185-7		16.54 [.651]	745185-6
OBSOLETE		16.54 [.651]	745185-5
OBSOLETE	—	—	745185-4
SUPSD BY 745185-7		10.85 [.427]	745185-3
SUPSD BY 745185-1		3.18 [.125]	745185-2
		3.18 [.125]	745185-1
	GOLD FINISH	A	PART NUMBER

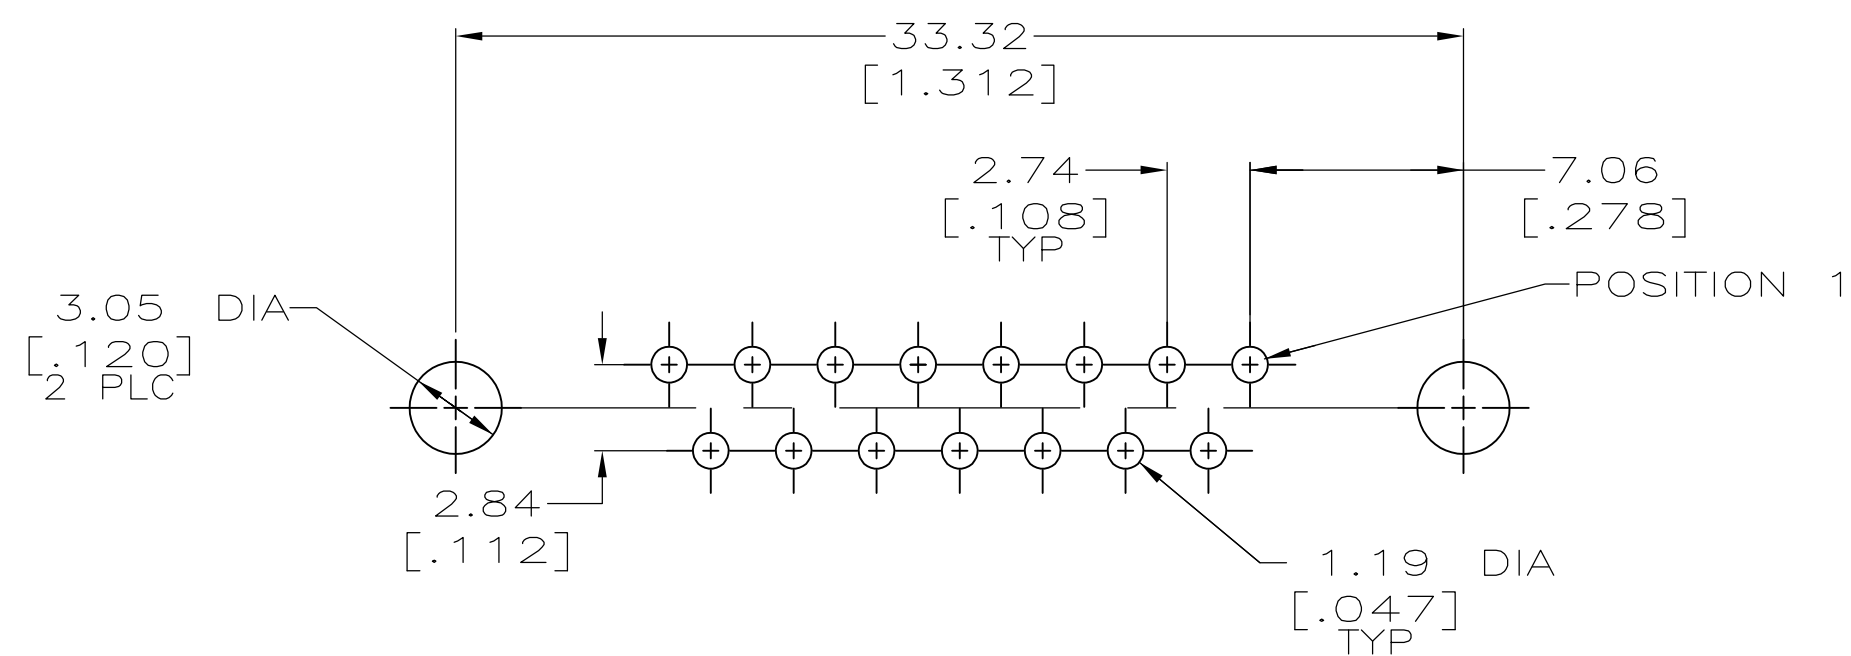

P.C. BOARD MOUNTING DIMENSIONS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. REIFSNEYDER 07 AUG 95		 Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK R. STONE 23 AUG 95		NAME RECEPTACLE ASSY, SIZE 2 15 POS, VERTICAL, TM	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. TAYLOR 23 AUG 95			
		PRODUCT SPEC 108-40005			
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± 2°		APPLICATION SPEC 114-40013			
MATERIAL		WEIGHT -		SIZE A2	CAGE CODE 00779
		FINISH SEE TABLE		DRAWING NO C-745185	RESTRICTED TO -
CUSTOMER DRAWING				SCALE NTS	SHEET 1 of 1
				REV 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[745185-1](#)