


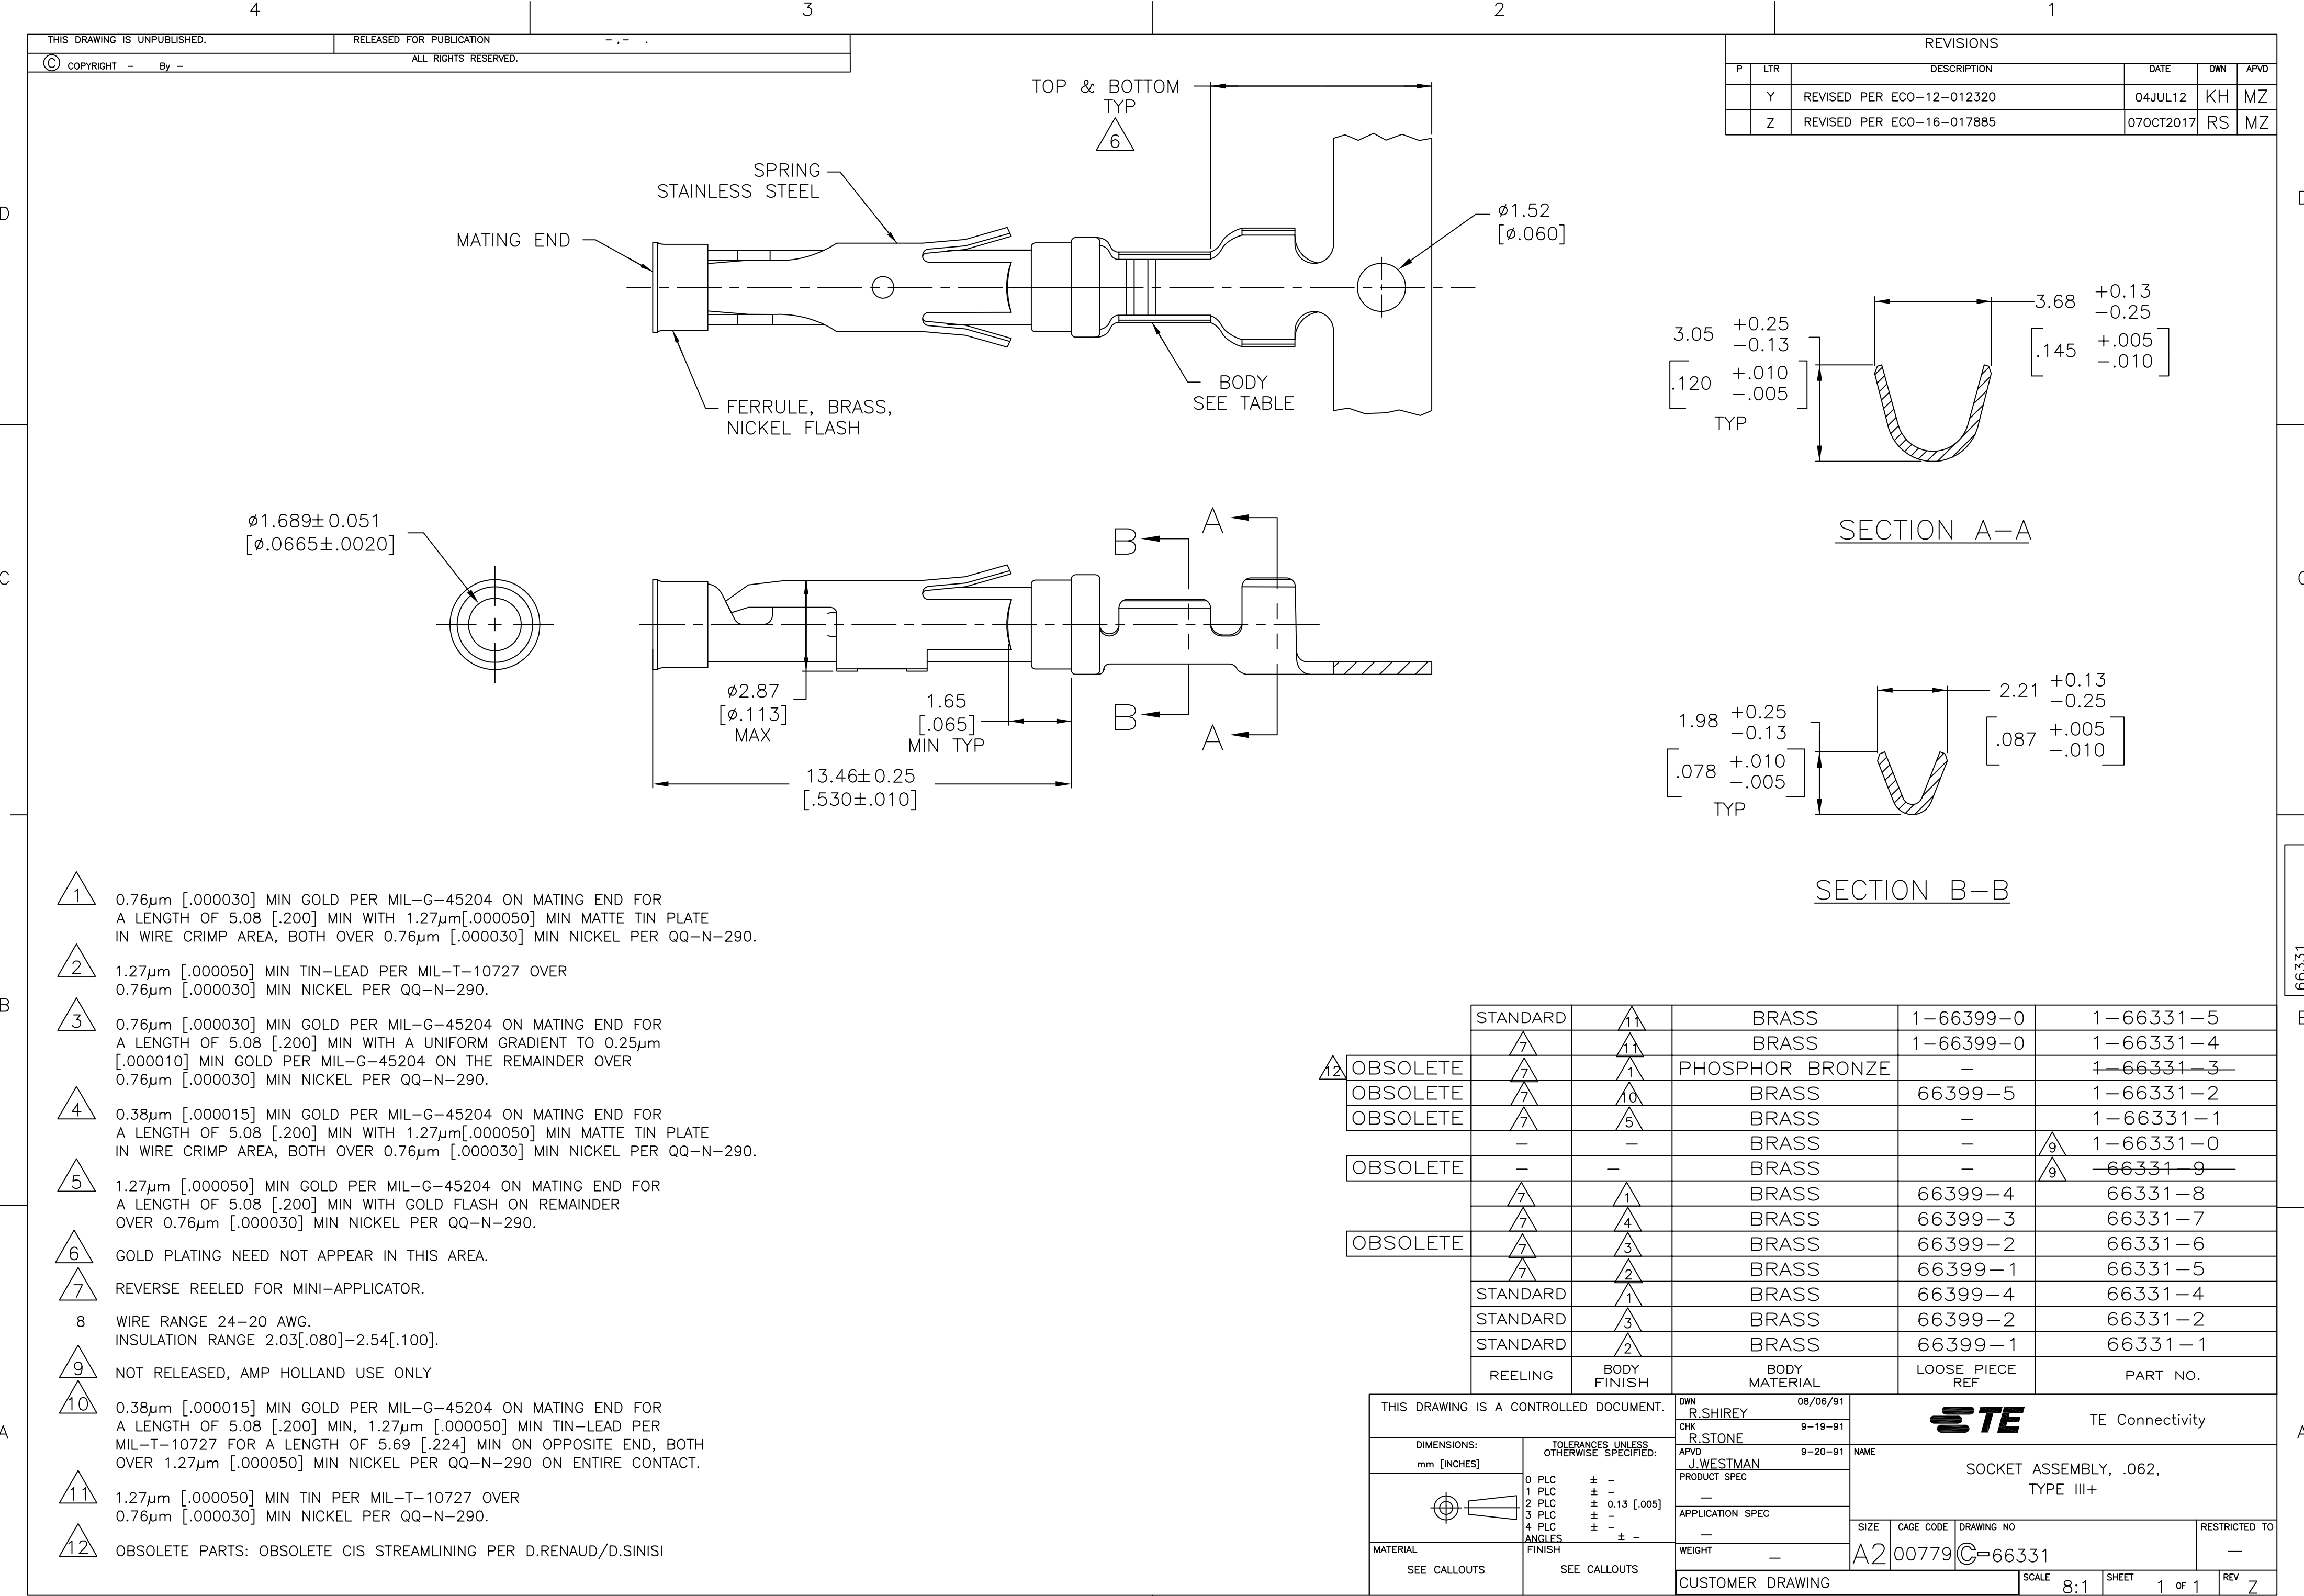

- 1 0.76 μ m [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH 1.27 μ m[.000050] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 0.76 μ m [.000030] MIN NICKEL PER QQ-N-290.
- 2 1.27 μ m [.000050] MIN TIN-LEAD PER MIL-T-10727 OVER 0.76 μ m [.000030] MIN NICKEL PER QQ-N-290.
- 3 0.76 μ m [.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH A UNIFORM GRADIENT TO 0.25 μ m [.000010] MIN GOLD PER MIL-G-45204 ON THE REMAINDER OVER 0.76 μ m [.000030] MIN NICKEL PER QQ-N-290.
- 4 0.38 μ m [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH 1.27 μ m[.000050] MIN MATTE TIN PLATE IN WIRE CRIMP AREA, BOTH OVER 0.76 μ m [.000030] MIN NICKEL PER QQ-N-290.
- 5 1.27 μ m [.000050] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN WITH GOLD FLASH ON REMAINDER OVER 0.76 μ m [.000030] MIN NICKEL PER QQ-N-290.
- 6 GOLD PLATING NEED NOT APPEAR IN THIS AREA.
- 7 REVERSE REELED FOR MINI-APPLICATOR.
- 8 WIRE RANGE 24-20 AWG. INSULATION RANGE 2.03[.080]-2.54[.100].
- 9 NOT RELEASED, AMP HOLLAND USE ONLY
- 10 0.38 μ m [.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [.200] MIN, 1.27 μ m [.000050] MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 5.69 [.224] MIN ON OPPOSITE END, BOTH OVER 1.27 μ m [.000050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.
- 11 1.27 μ m [.000050] MIN TIN PER MIL-T-10727 OVER 0.76 μ m [.000030] MIN NICKEL PER QQ-N-290.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	Y	REVISED PER ECO-12-012320	04JUL12	KH	MZ
	Z	REVISED PER ECO-16-017885	07OCT2017	RS	MZ

	STANDARD		BRASS	1-66399-0	1-66331-5	
			BRASS	1-66399-0	1-66331-4	
	OBSOLETE		PHOSPHOR BRONZE	-	1-66331-3	
	OBSOLETE		BRASS	66399-5	1-66331-2	
	OBSOLETE		BRASS	-	1-66331-1	
	-	-	BRASS	-		1-66331-0
	OBSOLETE	-	BRASS	-		66331-9
			BRASS	66399-4	66331-8	
			BRASS	66399-3	66331-7	
OBSOLETE			BRASS	66399-2	66331-6	
			BRASS	66399-1	66331-5	
	STANDARD		BRASS	66399-4	66331-4	
	STANDARD		BRASS	66399-2	66331-2	
	STANDARD		BRASS	66399-1	66331-1	
	REELING	BODY FINISH	BODY MATERIAL	LOOSE PIECE REF	PART NO.	

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN R.SHIREY 08/06/91	TE Connectivity				
			CHK R.STONE 9-19-91					
DIMENSIONS: mm [INCHES]		 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 [.005] 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH	APVD J.WESTMAN 9-20-91	NAME SOCKET ASSEMBLY, .062, TYPE III+				
			PRODUCT SPEC -					
				APPLICATION SPEC -				
MATERIAL SEE CALLOUTS				WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=66331	RESTRICTED TO -
			CUSTOMER DRAWING			SCALE 8:1	SHEET 1 of 1	REV Z

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-66331-5](#)