

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0850480866

Status:

Active

Overview:

DIN 41612

Description:

2.54mm Pitch DIN 41612/IEC 603-2 Mixed Layout Connector, Through Hole, Vertical, Female Style M, 80 Circuits, Lead-Free

Documents:

3D Model


RoHS Certificate of Compliance (PDF)

Drawing (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	Backplane Connectors
Series	85048
Application	Backplane
Comments	Mixed Layout
Component Type	PCB Receptacle
Overview	DIN 41612
Product Name	IEC 603-2/DIN 41612
Style	M
UPC	800753857520

Physical	
Circuits (Loaded)	80
Circuits (maximum)	80
Circuits Detail	Rows A, B, & C
Durability (mating cycles max)	400
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Net Weight	12.246/g
Number of Columns	26
Number of Pairs	Open Pin Field
Number of Rows	3
Orientation	Vertical
PC Tail Length	2.90mm
PCB Locator	No
PCB Retention	Yes
Packaging Type	Carton
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	0.610µm
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55° to +125°C
Termination Interface: Style	Through Hole

Electrical	
Current - Maximum per Contact	1.0A

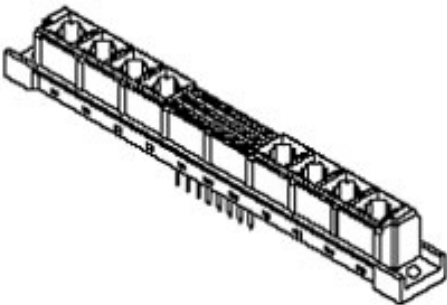

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

China RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

85048 Series

Mates With

DIN 41612/EIC 603-2 Mixed Layout Connector 85009 , 85017

Use With

85022 DIN 41612 High Current Contact

Data Rate	622.0 Mbps
Real Signals (per 25mm)	30
Voltage - Maximum	250V AC (RMS)

Solder Process Data

Duration at Max. Process Temperature (seconds)	010
Lead-freeProcess Capability	WAVE
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Sales Drawing	SD-85048-0001, SD-85048-0866
---------------	------------------------------

This document was generated on 09/07/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

85048-0866