

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0010081022

Status:

Active

Overview:

KK 508 Connector System

Description:

KK Header, Vertical, Round Pin, 2 Circuits, Tin (Sn) Plating, Pin Length 23.80mm

Documents:

3D Model

Packaging Specification 30030001-PK-000 (PDF)


Drawing (PDF)

RoHS Certificate of Compliance (PDF)

Product Specification PS-99020-0087-001 (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	3003
Application	Board-to-Board, Power, Wire-to-Board
Overview	KK 508 Connector System
Product Name	KK 508
UPC	800753744929

Physical	
Breakaway	No
Circuits (Loaded)	2
Circuits (maximum)	2
Color - Resin	Natural
Durability (mating cycles max)	25
First Mate / Last Break	No
Flammability	94V-2
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Net Weight	0.601/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.94mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	5.08mm
Pitch - Termination Interface	5.08mm
Plating min - Mating	5.080µm
Plating min - Termination	5.080µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	See Product Specification
Termination Interface: Style	Through Hole

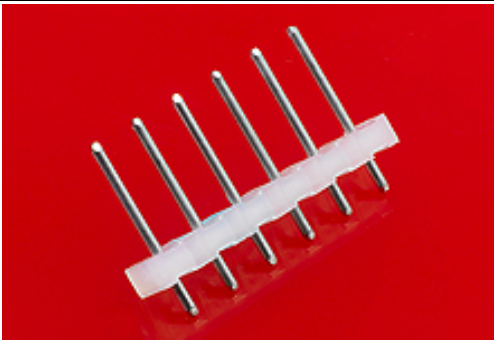

Series image - Reference only

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - ED/30/2017 (7 July 2017)	
Halogen-Free	
Status	
Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

3003 Series

Mates With

KK Crimp Housing 3001
KK PCB Receptacle 3002

Electrical

Current - Maximum per Contact	7.0A
Voltage - Maximum	250V

Solder Process Data

Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235

Material Info

Engineering Number	300302B
--------------------	---------

Reference - Drawing Numbers

Packaging Specification	30030001-PK-000
Product Specification	PS-99020-0087-001
Sales Drawing	SDAE-3003-N*

This document was generated on 10/04/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[10-08-1022](#)