





NOTES:

- 1. ROHS COMPLIANT
- 2. HEADER: THERMOSET PLASTIC MATERIAL WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
- 3. STORAGE TEMPERATURE: -50°C TO +125°C
- 4. COMPLIANCE TO J-STD:
 - A. J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
 - B. J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
 - C. J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
- TO ORDER TAPE & REEL PACKAGING ADD A "T" SUFFIX
 TO THE PART NUMBER(i.e HX1198NL BECOMES HX1198NLT).







FINAL OUTLINE

Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (07/30/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,100D,1:1,SMT	HX1198NL-12	PS-2005.001-F	1 OF 3	HX1198NL	А

E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US), ASIA@PUI SFFI FCTRONICS.COM(Asia) PHON

PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768





ELECTRICAL CHARACTERISTICS AT +25°C UNLESS OTHER SPECIFIED


MEETS IEEE 802.3 SPECIFICATION

PARAMETER	SPECIFICATIONS			
OPERATING TEMP	-40°C ∼ +85°C			
TURNS RATIO	1 : 1 ± 2%			
POLARITY	PER SCHEMATIC			
	100 KHz	1-125 MHz		
INSERTION LOSS	-1.2 dB MAX	-0.2-0.002*f ^{1.4} dB MAX		
RETURN LOSS	5MHz	30-80MHz		
$(Z OUT = 100 OHM \pm 15\%)$	-18 dB MIN	-16 + 26LOG (f/30MHz) dB MI		
INDUCTANCE (OCL) (MEDIA SIDE, -40°C ~ +85°C)	350 uH MIN (MEASURED AT 100 KHz, 100 mVRMS) AND WITH 8 mA DC BIAS			
CROSSTALK	1 MHz	5-100MHz		
(TX-RX)	-62 dB MIN	-45 + 21LOG ₁₀ (f/30MHz) dB MIN		
DIFFERENTIAL TO	5–200MHz			
COMMON MODE REJECTION	-50+17LOG ₁₀ (f/5MHz) dB MIN			
ISOLATION (INPUT – OUTPUT)	1500 VRMS MIN @ 60 SECONDS			

NOTE: f IS FREQUENCY IN MHz.

TRANSMIT --016 TX+ TD+ 1 0-علا Э ഡൗ __015 CMT TCT 2 O-_____ Jue 5 3 TD- 3 0--0 14 TX-1:1CT

RECEIVE

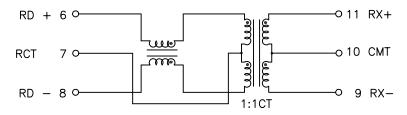

SCHEMATIC

@ Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confid	fidential &	proprietary.	(07/30/15)
--	-------------	--------------	------------


PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,100D,1:1,SMT	HX1198NL-12	PS-2005.001-F	2 OF 3	HX1198NL	А

E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US). ASIA@PUI SFFI FCTRONICS.COM(Asia)

PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768





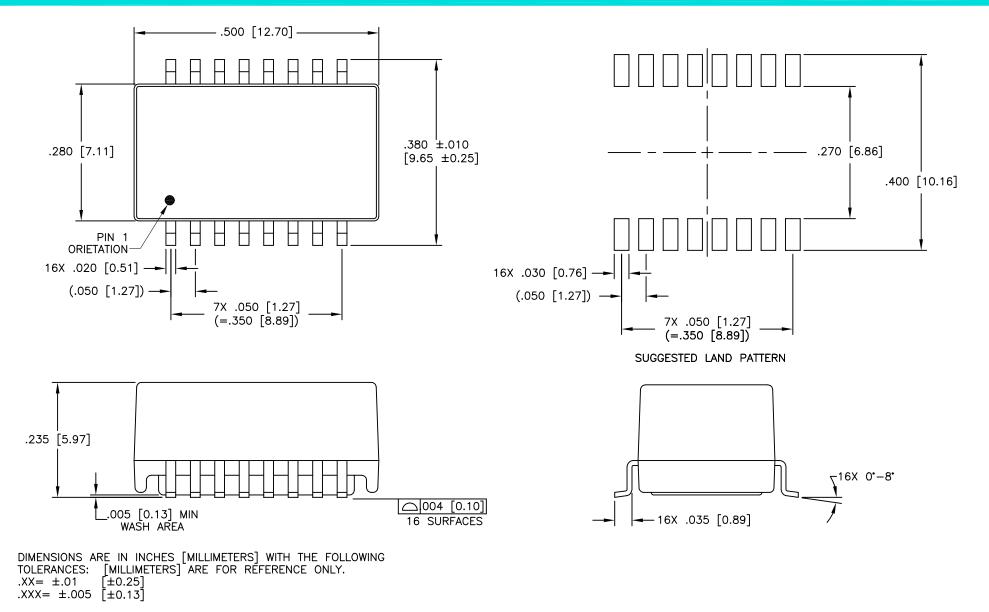

© Copyright, 2015. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (07/30/15)

PRODUCT DESCRIPTION	TLA DRAWING	PS DRAWING	SHEET	PART NO.	DATASHEET REV.
MDL,SIN,100D,1:1,SMT	HX1198NL-12	PS-2005.001-F	3 OF 3	HX1198NL	A

E-MAIL: PRODINFONETWORK@PULSEELECTRONICS.COM(US), ASIA@PUI SFFI FCTRONICS.COM(Asia)

PHONE: USA:858 674 8100, GERMANY:49 7032 78060, SINGAPORE:65 6287 8998, SHANGHAI:86 21 62787060, TAIWAN:886 3 4356768

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse: <u>HX1198NL</u> <u>HX1198NLT</u>