
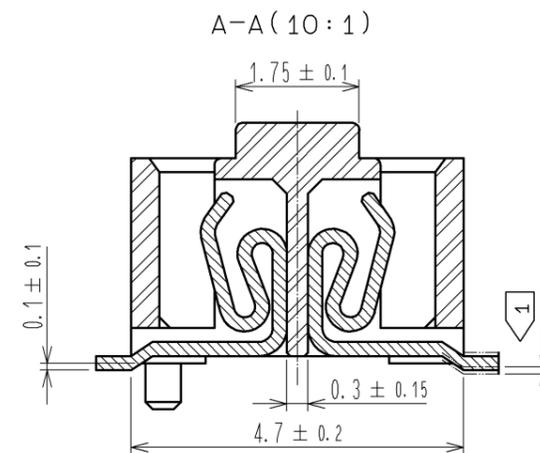
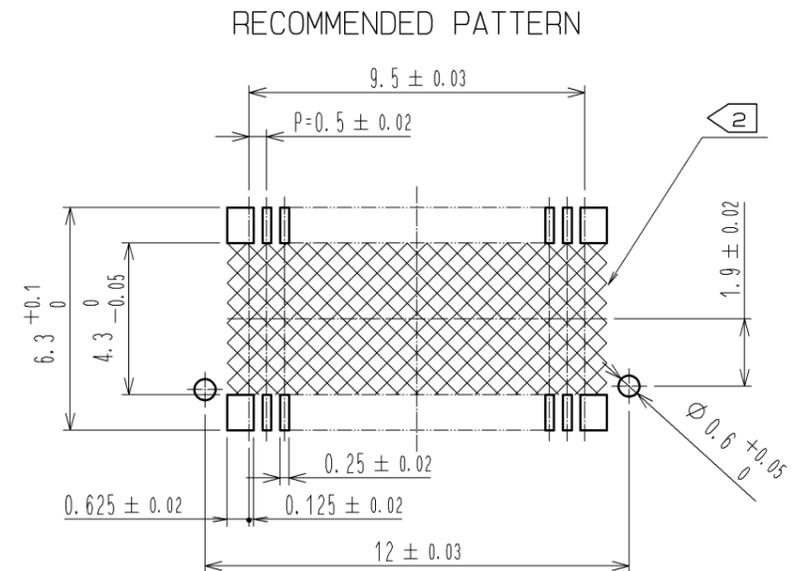
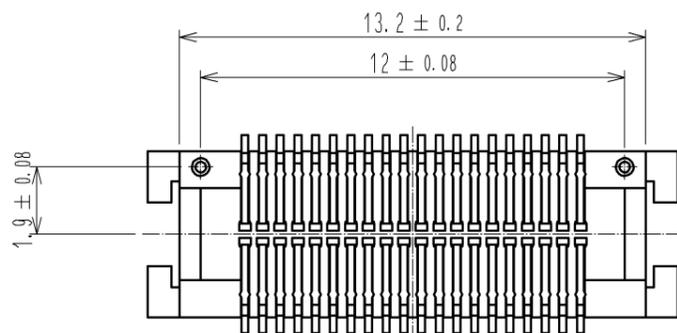
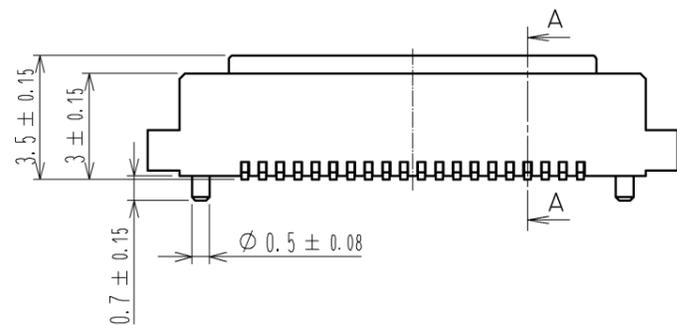


Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

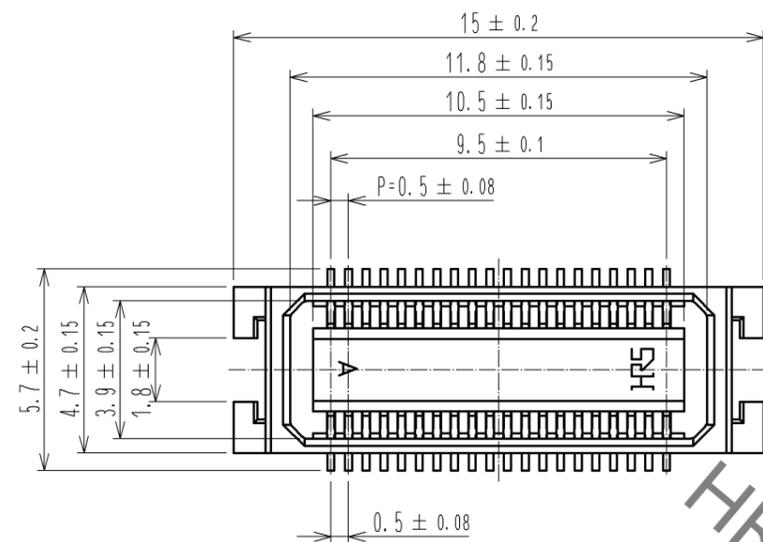


HRS DRAWING FOR REFERENCE

- NOTES ①: LEAD CO-PLANARITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1mm MAX.
②: WHEN A PART MARKED WITH HAS A PATTERN BUT NO RESIST ON IT. TAKE CARE TO PREVENT THE CONNECTOR FROM TOUCHING IT.


MATED HIGHT (h) (mm)

HEADER NO.	RECEPTACLE NO.	h
DF17#(2.0)-40DP-0.5V(57)	DF17A(3.0)-40DS-0.5V(57)	5
DF17#(4.0)-40DP-0.5V(57)		7

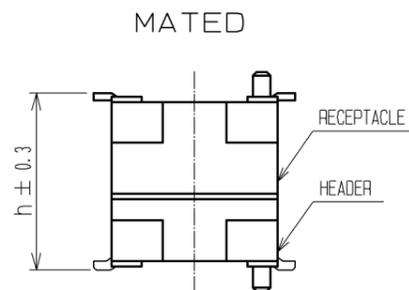

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS	
2	POLYAMIDE (PA6T)	WHITE BEIGE	UL94V-0	5	PS	BLACK	(PLASTIC REEL)	
1	PHOSPHER BRONZE	CONTACT AREA: GOLD PLATED 0.1µm min	LEAD AREA: GOLD PLATED 0.02µm min	4	POLYESTER	CLEAR	(COVER TAPE)	
				3	A-PET	CLEAR	(EMBOSSSED CARRIER TAPE)	
UNITS: mm		SCALE: 5:1	COUNT:	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
APPROVED: KH. IKEDA		08.11.20		DRAWING NO.		EDC3-161648-02		
CHECKED: TS. MIYAZAKI		08.11.20		PART NO.		DF17A(3.0)-40DS-0.5V(57)		
DESIGNED: TY. YAMASAKI		08.11.19		CODE NO.		CL683-0014-1-57		
DRAWN: TY. YAMASAKI		08.11.19				1/2		

Apr.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

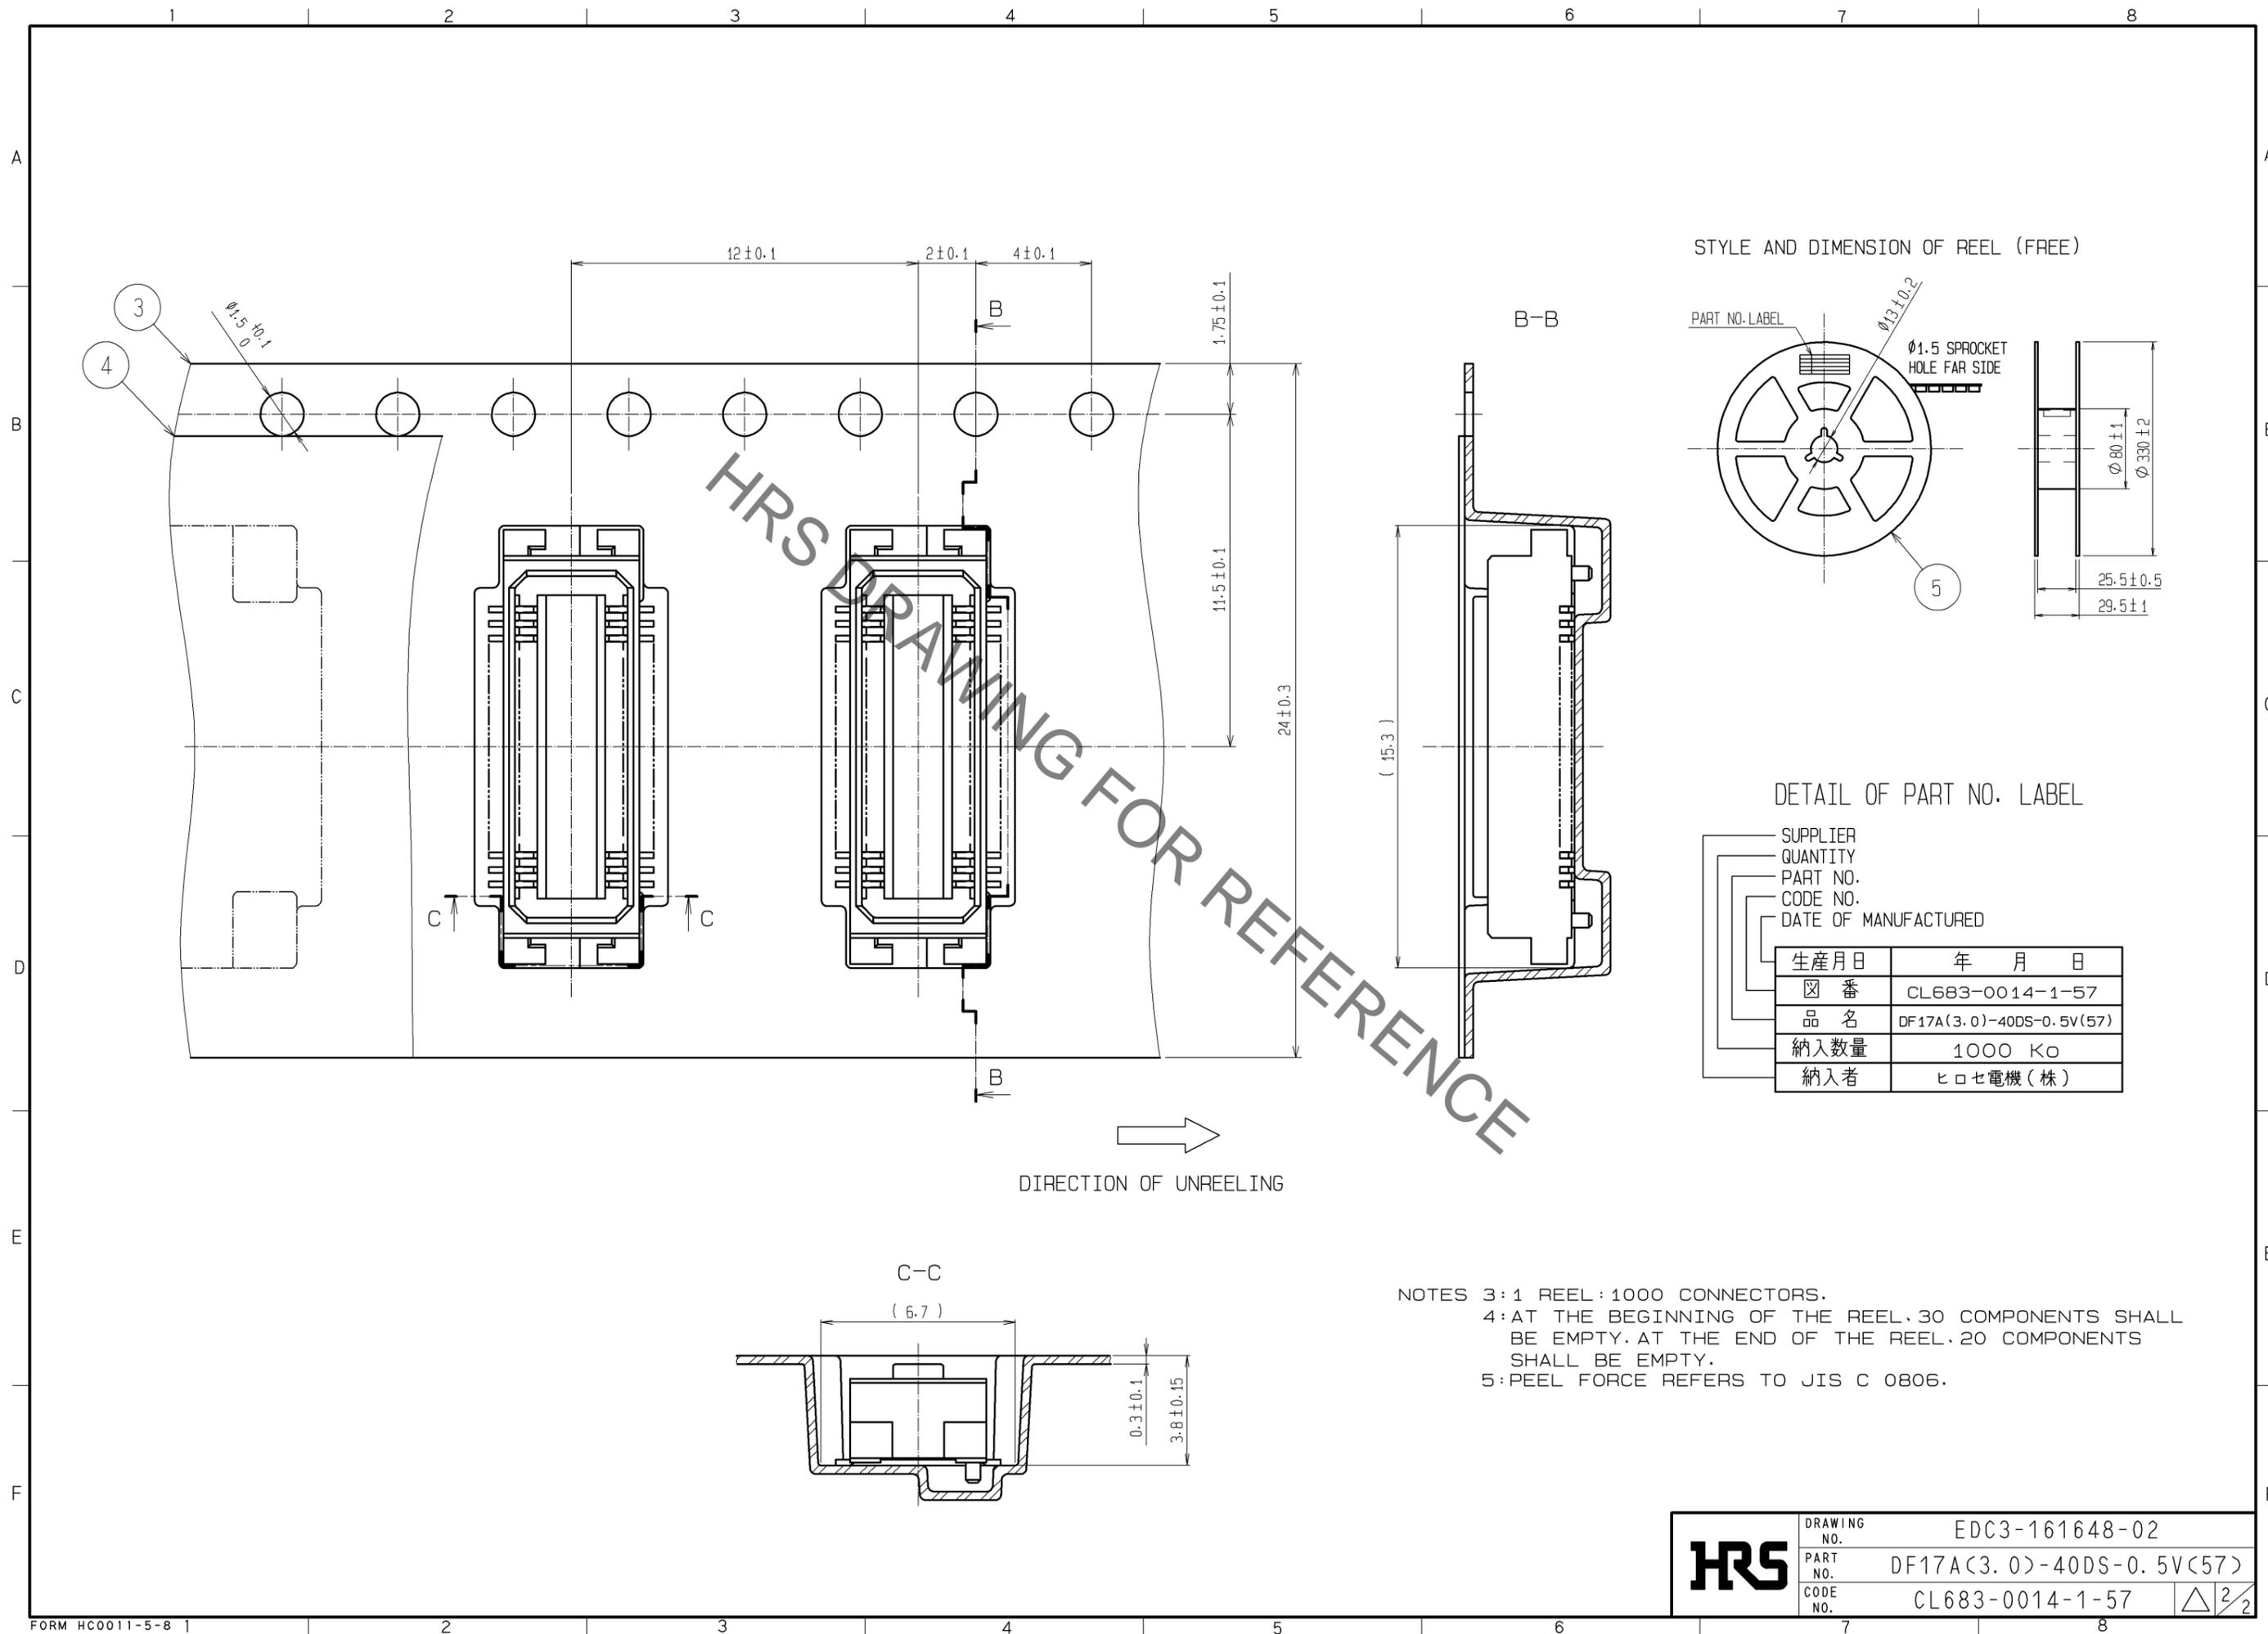

HRS DRAWING FOR REFERENCE

DIRECTION OF UNREELING

NOTES 3:1 REEL:1000 CONNECTORS.
 4: AT THE BEGINNING OF THE REEL, 30 COMPONENTS SHALL BE EMPTY. AT THE END OF THE REEL, 20 COMPONENTS SHALL BE EMPTY.
 5: PEEL FORCE REFERS TO JIS C 0806.

DETAIL OF PART NO. LABEL

SUPPLIER	
QUANTITY	
PART NO.	
CODE NO.	
DATE OF MANUFACTURED	
生産月日	年 月 日
☒ 番	CL683-0014-1-57
品名	DF17A(3.0)-40DS-0.5V(57)
納入数量	1000 KO
納入者	ヒロセ電機(株)

HRS	DRAWING NO.	EDC3-161648-02
	PART NO.	DF17A(3.0)-40DS-0.5V(57)
	CODE NO.	CL683-0014-1-57
		△ 2/2