


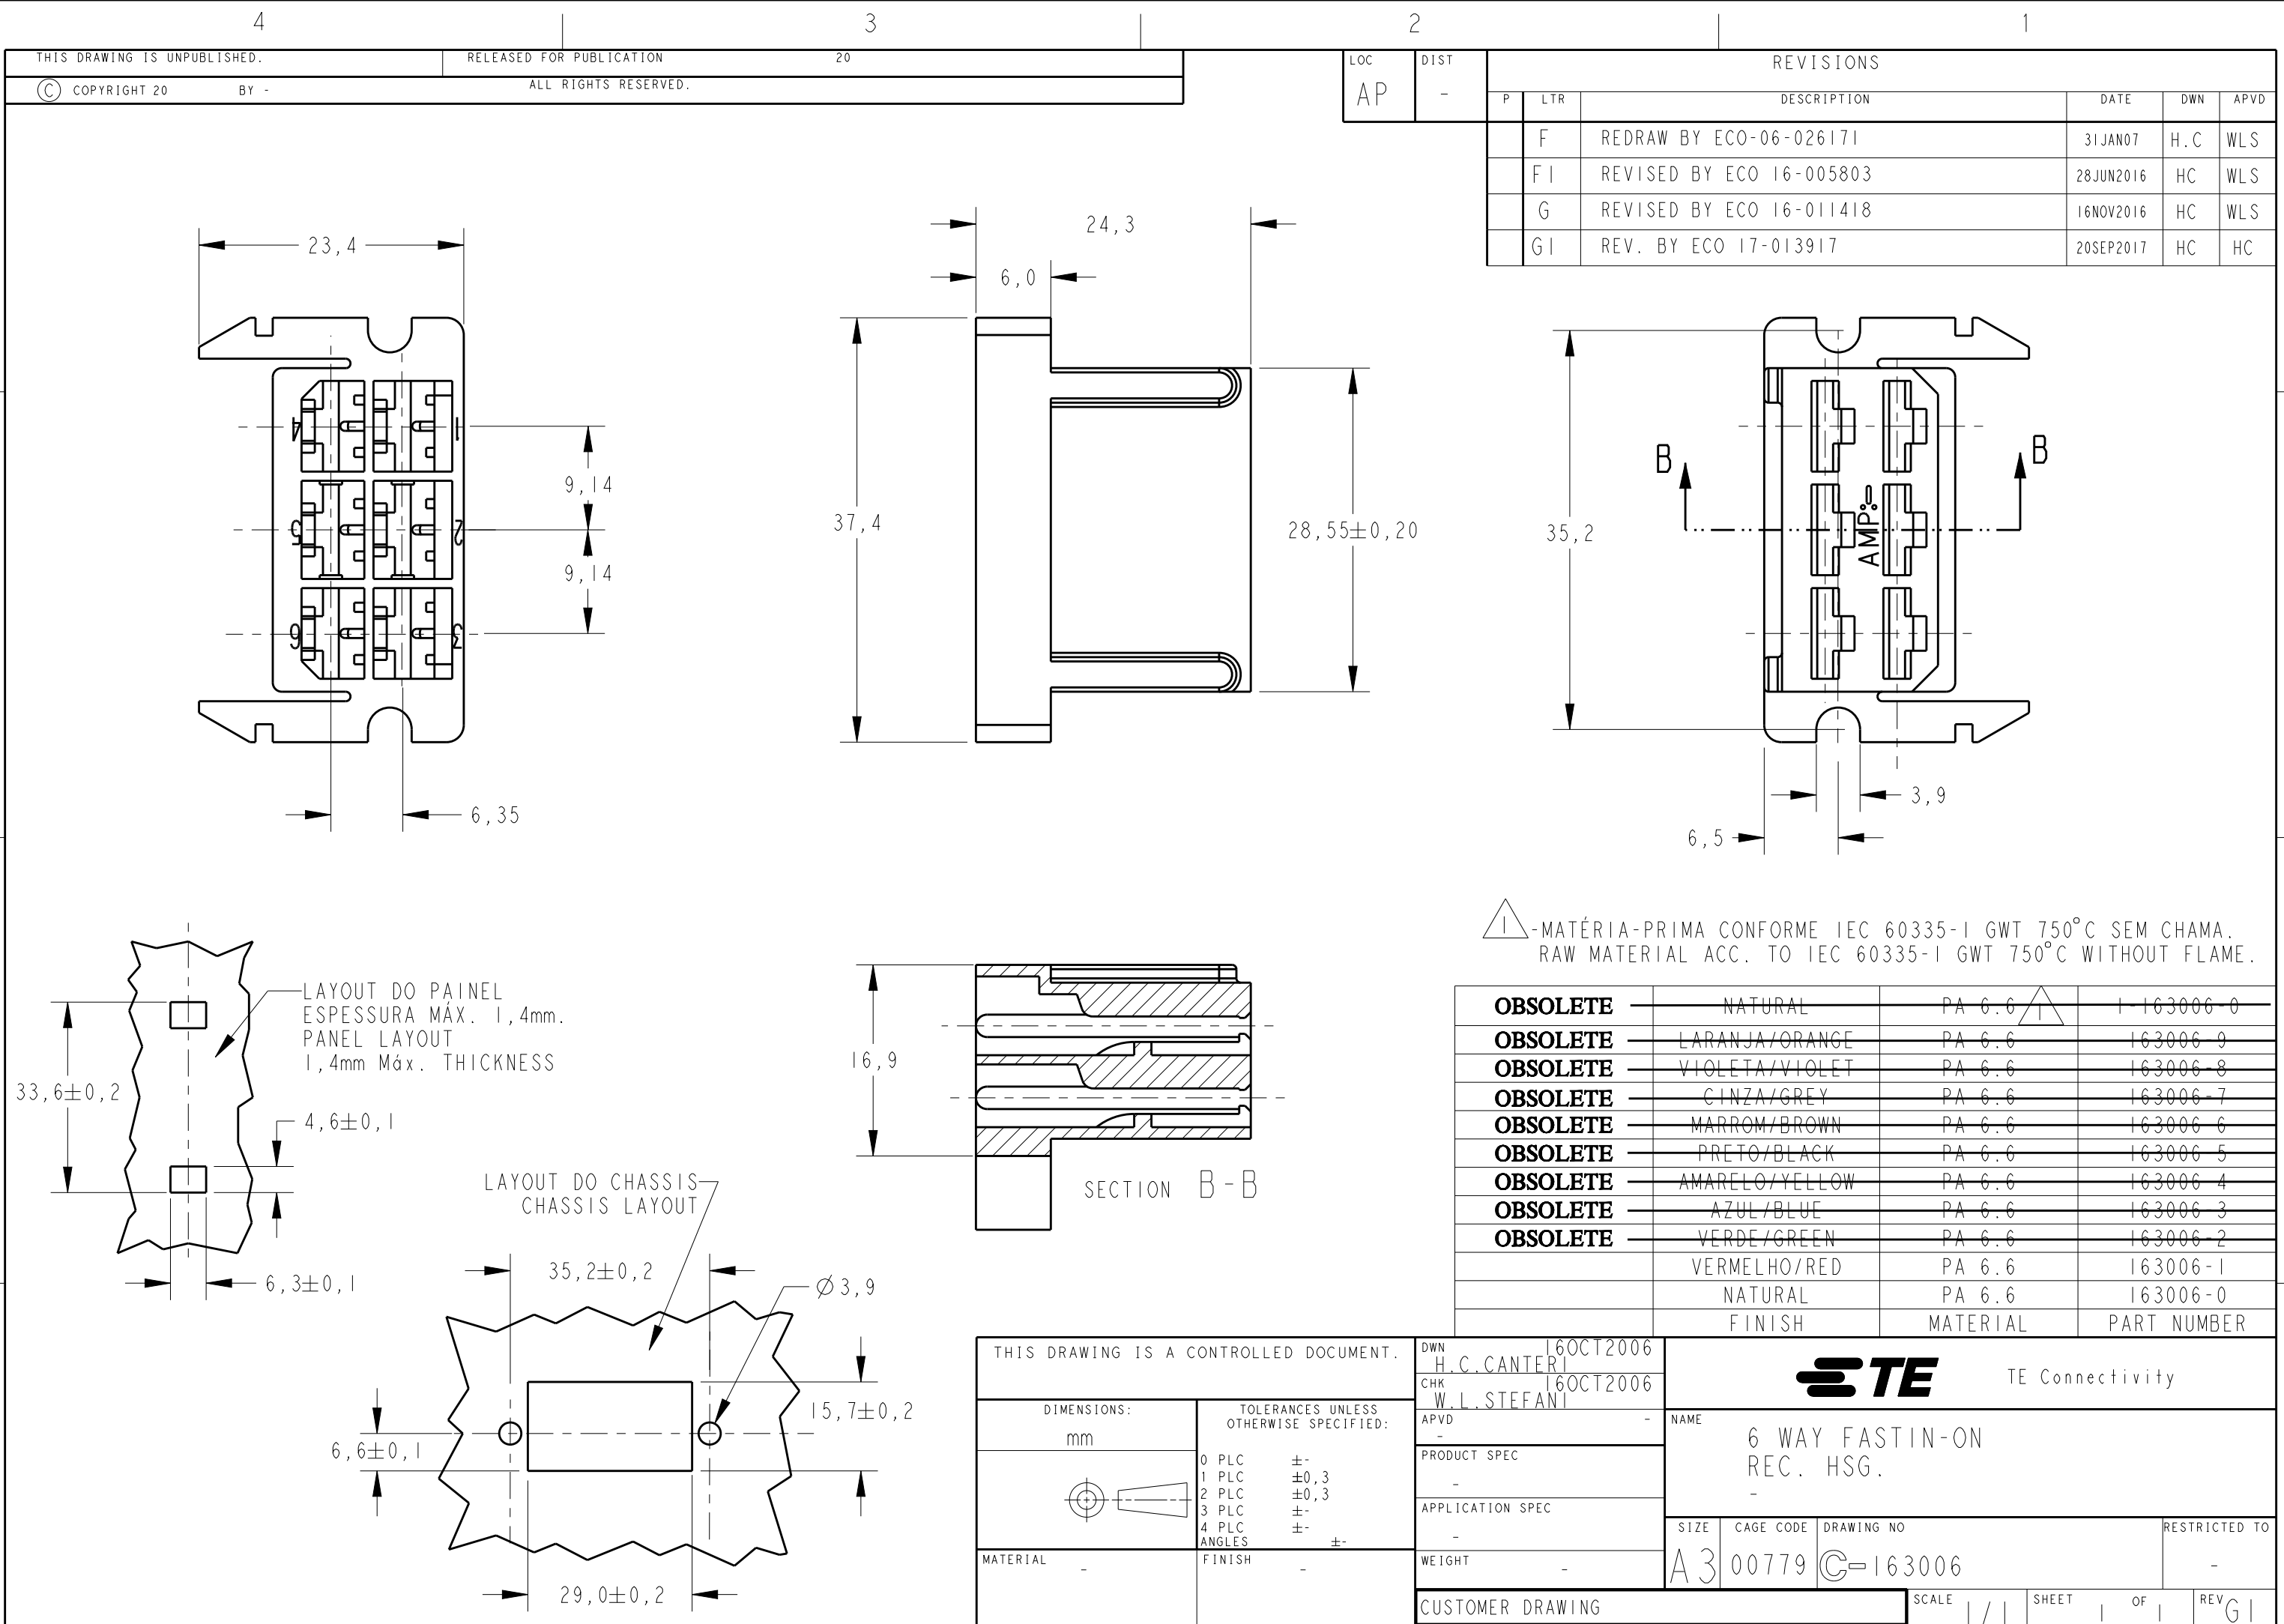

△

-MATÉRIA-PRIMA CONFORME IEC 60335-1 GWT 750°C SEM CHAMA.
RAW MATERIAL ACC. TO IEC 60335-1 GWT 750°C WITHOUT FLAME.

OBSOLETE	NATURAL	PA 6.6	1 163006 0
OBSOLETE	LARANJA/ORANGE	PA 6.6	163006 9
OBSOLETE	VIOLETA/VIOLET	PA 6.6	163006 8
OBSOLETE	CINZA/GREY	PA 6.6	163006 7
OBSOLETE	MARROM/BROWN	PA 6.6	163006 6
OBSOLETE	PRETO/BLACK	PA 6.6	163006 5
OBSOLETE	AMARELO/YELLOW	PA 6.6	163006 4
OBSOLETE	AZUL/BLUE	PA 6.6	163006 3
OBSOLETE	VERDE/GREEN	PA 6.6	163006 2
	VERMELHO/RED	PA 6.6	163006-1
	NATURAL	PA 6.6	163006-0
	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN 16OCT2006 H.C.CANTERI

CHK 16OCT2006 W.L.STEFANI

APVD -

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±0,3

1 PLC ±0,3

2 PLC ±0,3

3 PLC ±0,3

4 PLC ±0,3

ANGLES ±0,3

MATERIAL -

FINISH -

NAME 6 WAY FASTIN-ON REC. HSG.

SIZE A3

CAGE CODE 00779

DRAWING NO C-163006

RESTRICTED TO -

SCALE 1/1

SHEET 1

OF 1

REV GI

1470-19 (3/11)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[163006-1](#)