

LOC	DIST	REVISIONS					
A1	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C38	ECR-18-000171	05JAN2018	KD	RR
			C39	ECR-18-001281	24FEB2018	LZ	RR

REMARKS/Bemerkungen

- 1

CAVITY SUITABLE FOR STANDARD TIMER CONTACTS LISTED IN PROD.SPEC. 108-18049, ITEM 3.3.2
Kammer geeignet für Standard Timer Kontakte gelistet in Prod. Spec. 108-18049, Punkt 3.3.2
- 2

CONTACT CAVITY NO.
Kontaktkammernummerierung
- 3

MATING STOP
Tiefenanschlag
- 4

AREA FOR TE LOGO ACC: TO SPEC 202-36
Bereich für TE Logo nach Spec. 202-36
- 5

POLARIZATION RIB POSITION "a" AND/OR "b"
Polarisierungsrippe Position "a" und/oder "b"
- 6

KEYING RIB POSITION "c" AND/OR "d"
Kodierrippe Position "c" und/oder "d"
- 6a

KEYING RIB POSITION "c" AND/OR "d" AT THE END WALLS OF THE HOUSING
Kodierrippe Position "c" und/oder "d" an den Gehäusestirnseiten
- 7

LOCKING LATCH
Rasthaken
- 8

TE PART NO (PN)
TE Bestell Nr. (PN)
- 9

DESIGN OF THE HOUSINGS ACC. TO RAST 5 STANDARD
Gehäuseausführung gemäss RAST 5 Vorgabe
- 10

GENERAL SUITABLE TAB HEADER SEE RAST 5 PERFORMANCE
Generell passende Flachsteckerwannen siehe RAST 5 Vorgabe
- 11





PACKAGING: BULK PACKAGING IN CORRUGATED BOX PN 740580-2
2 POS. 2500 PIECES PER BOX / 3 POS. 2000 PIECES PER BOX
Verpackung: Schüttgut in Versandkarton Pn 740580-2
2pol. 2500 Stück per Karton / 3pol. 2000 Stück per Karton
- 12

DIMENSION A, B C AND D SEE SHEET 2 OF 3
- 13


MATERIAL CORRESPONDS TO THE REQUIRMENT EN 60335
(INCL. GLOW WIRE TEST 750° WITHOUT FLAME)
Material entspricht den Anforderungen der EN 60335
(inkl. Glühdrahttest 750° ohne Flamme)
- 14

RATIO NUMBER OF THE KEYING VERSION,INKJET PRINTED. SEE SHEET 2
Kodierungskennnummer, mit Tintenstrahldrucker aufgebracht . siehe Blatt 2
- 15

PRELIMINARY- NOT RELEASED FOR PRODUCTION

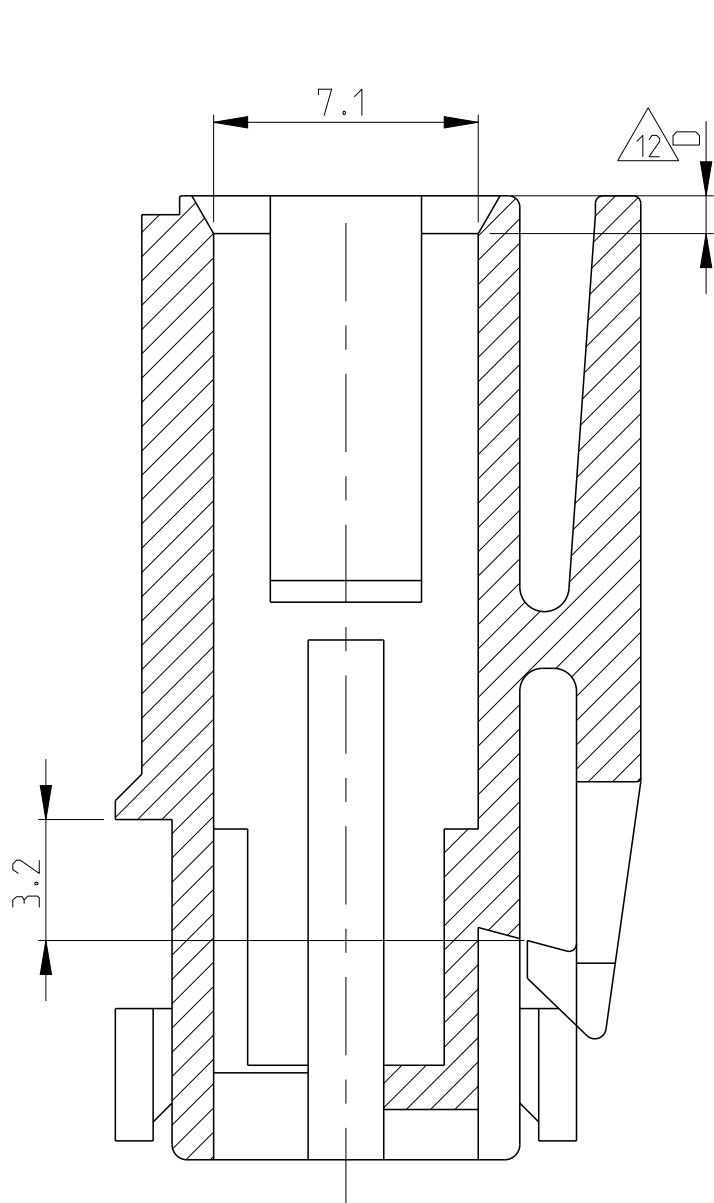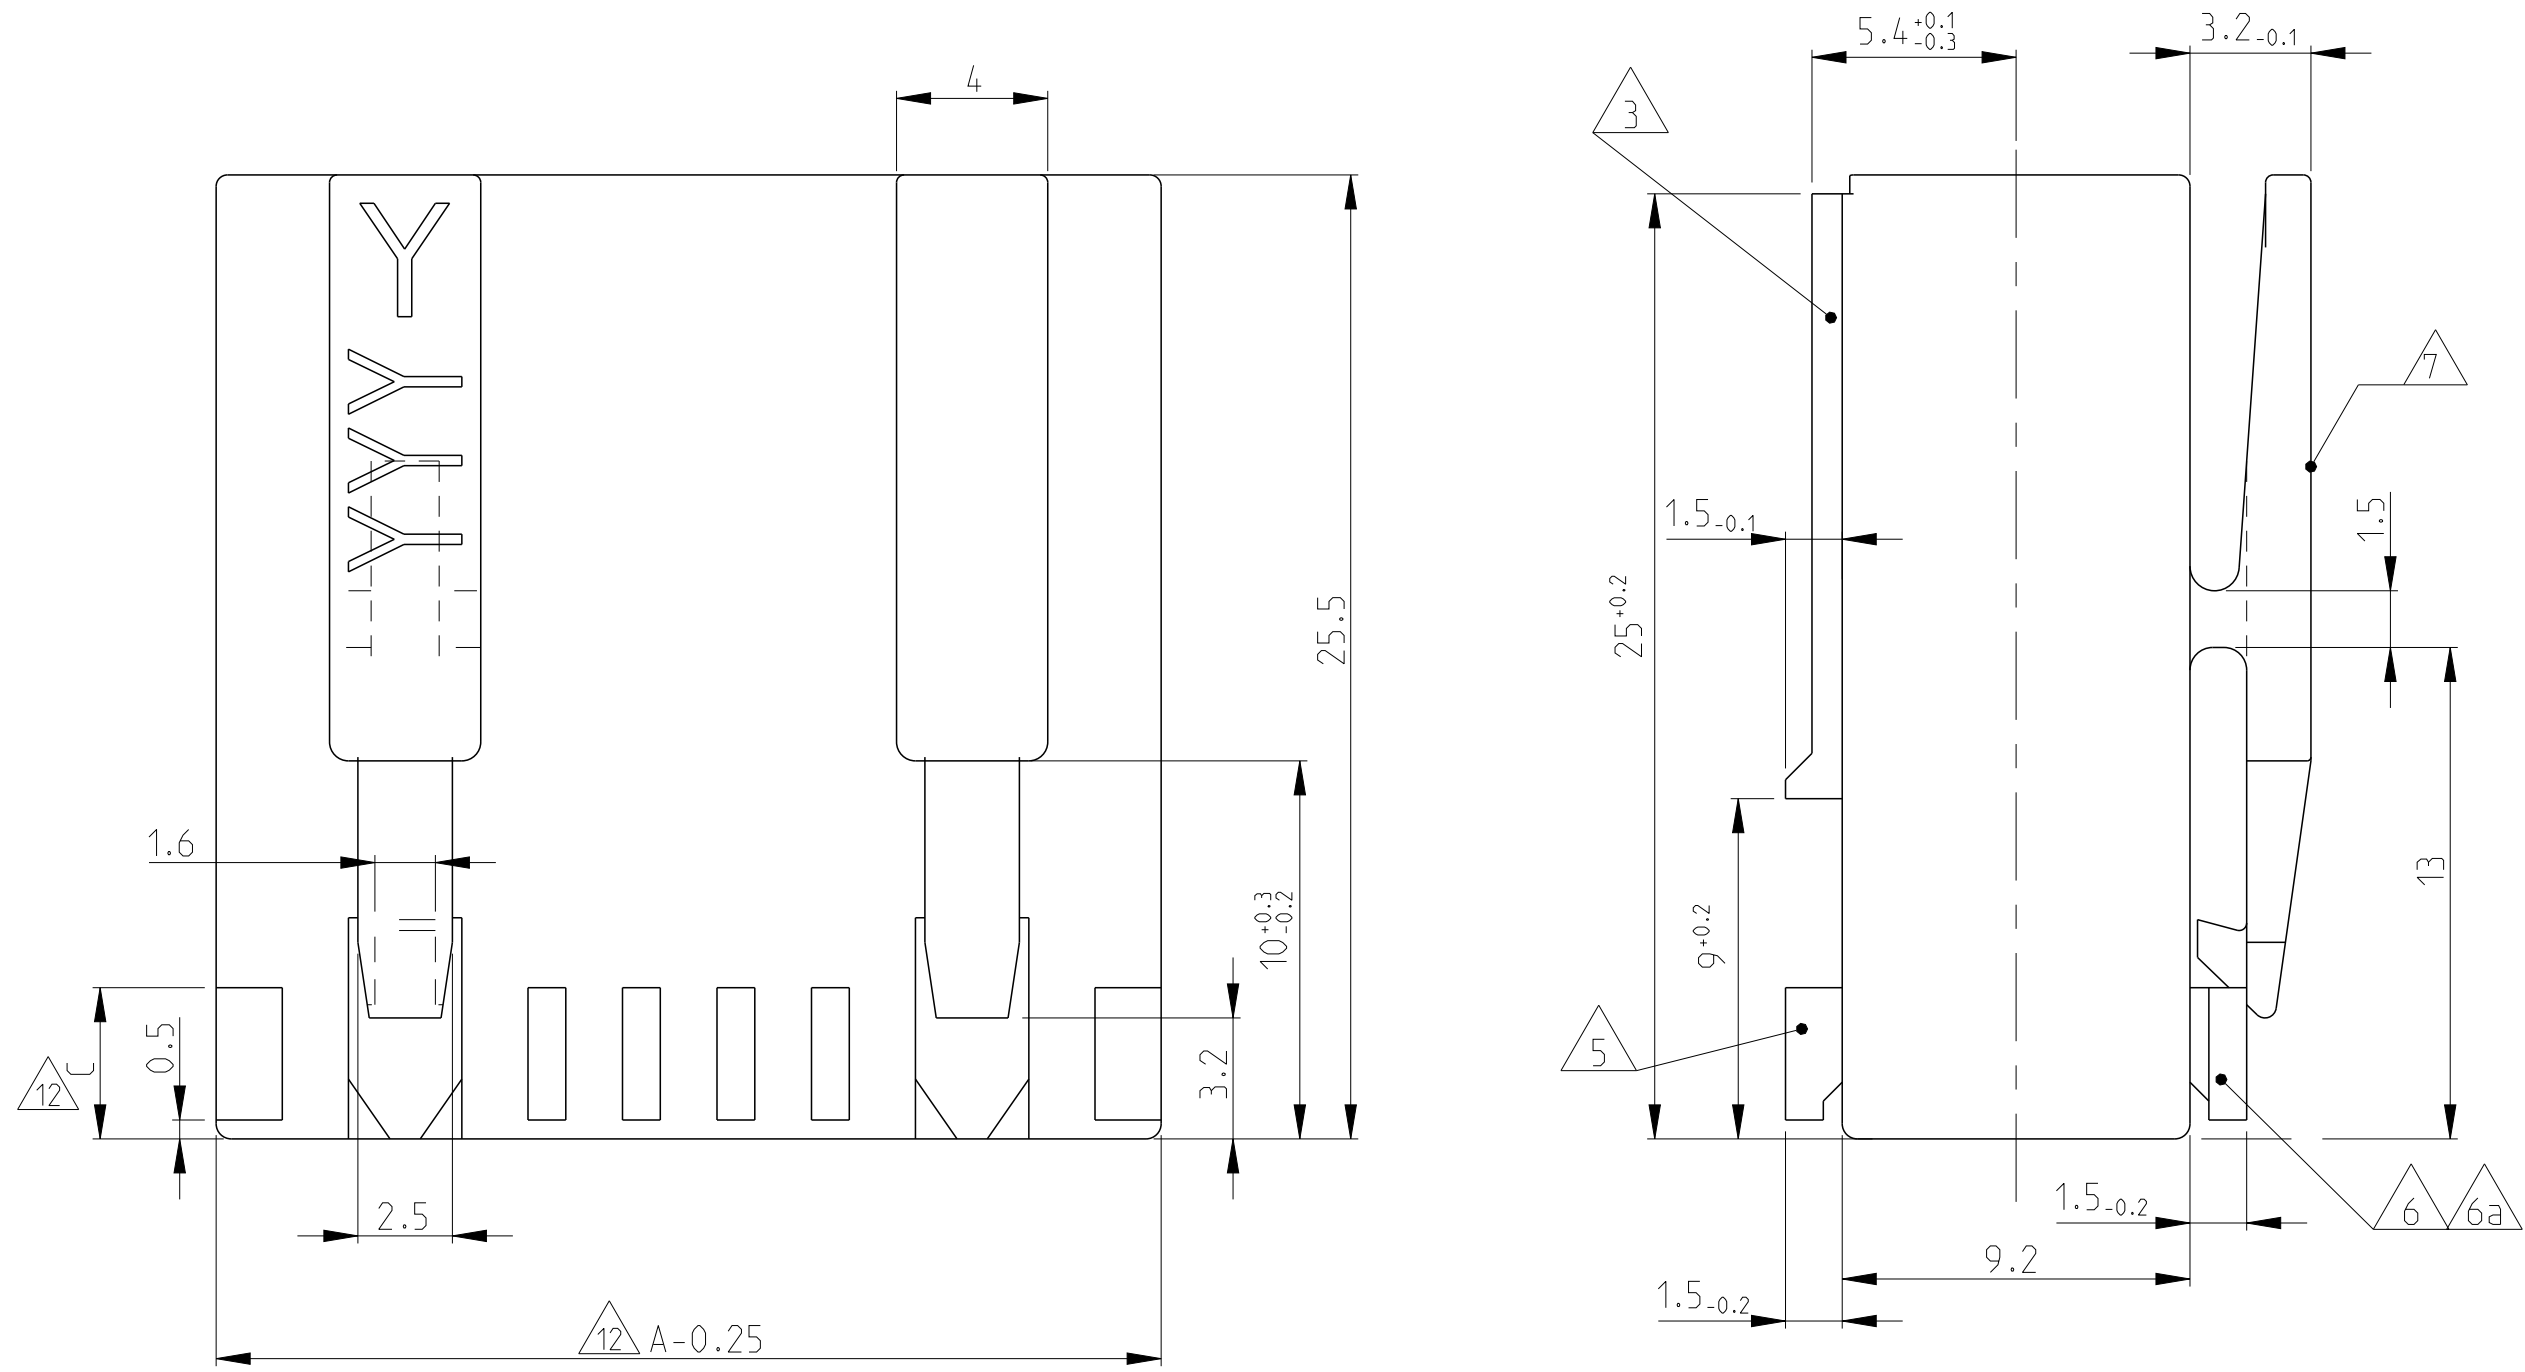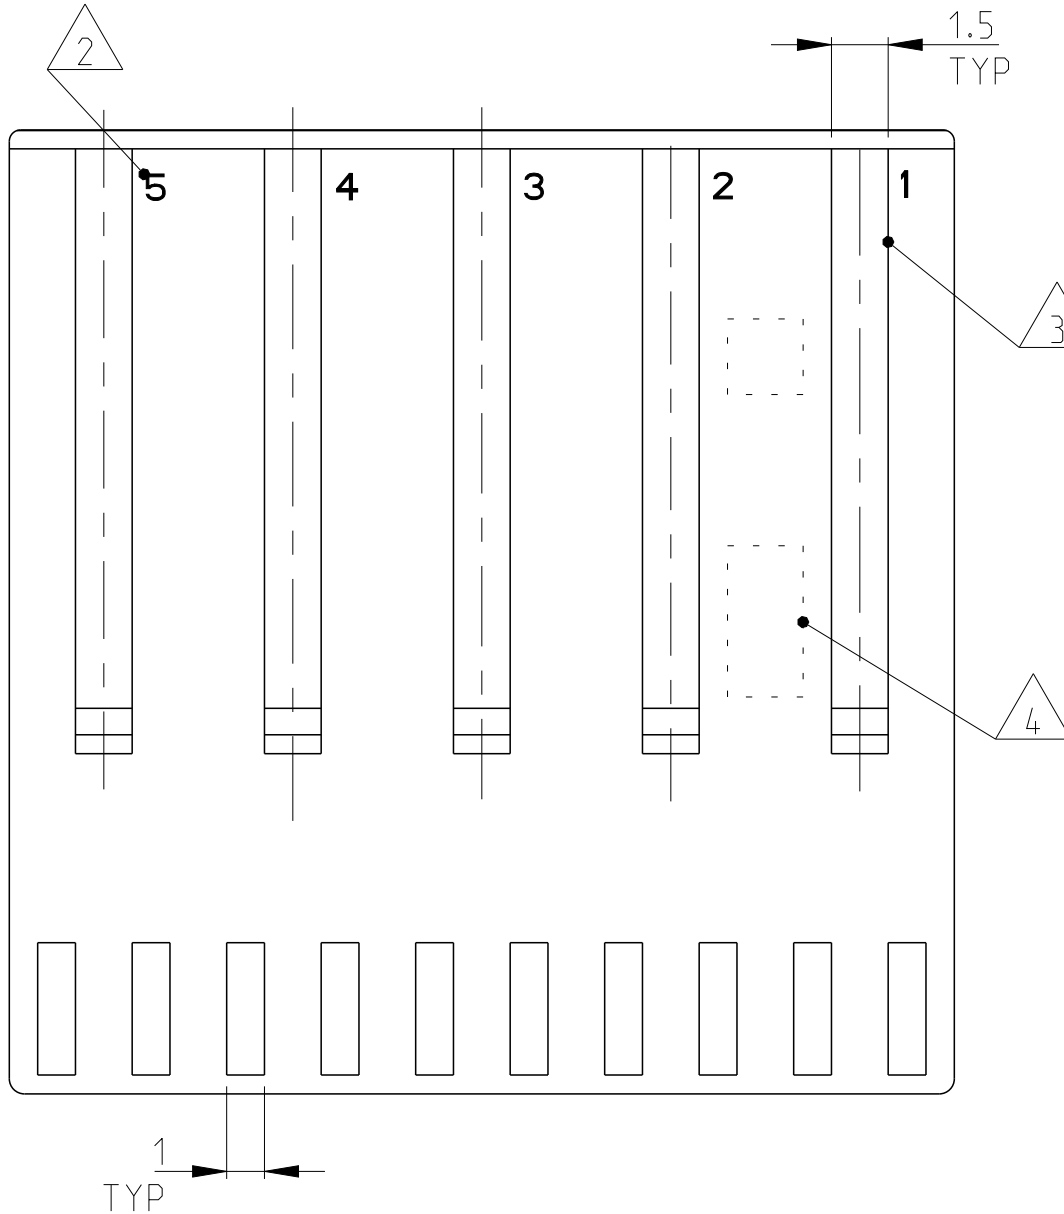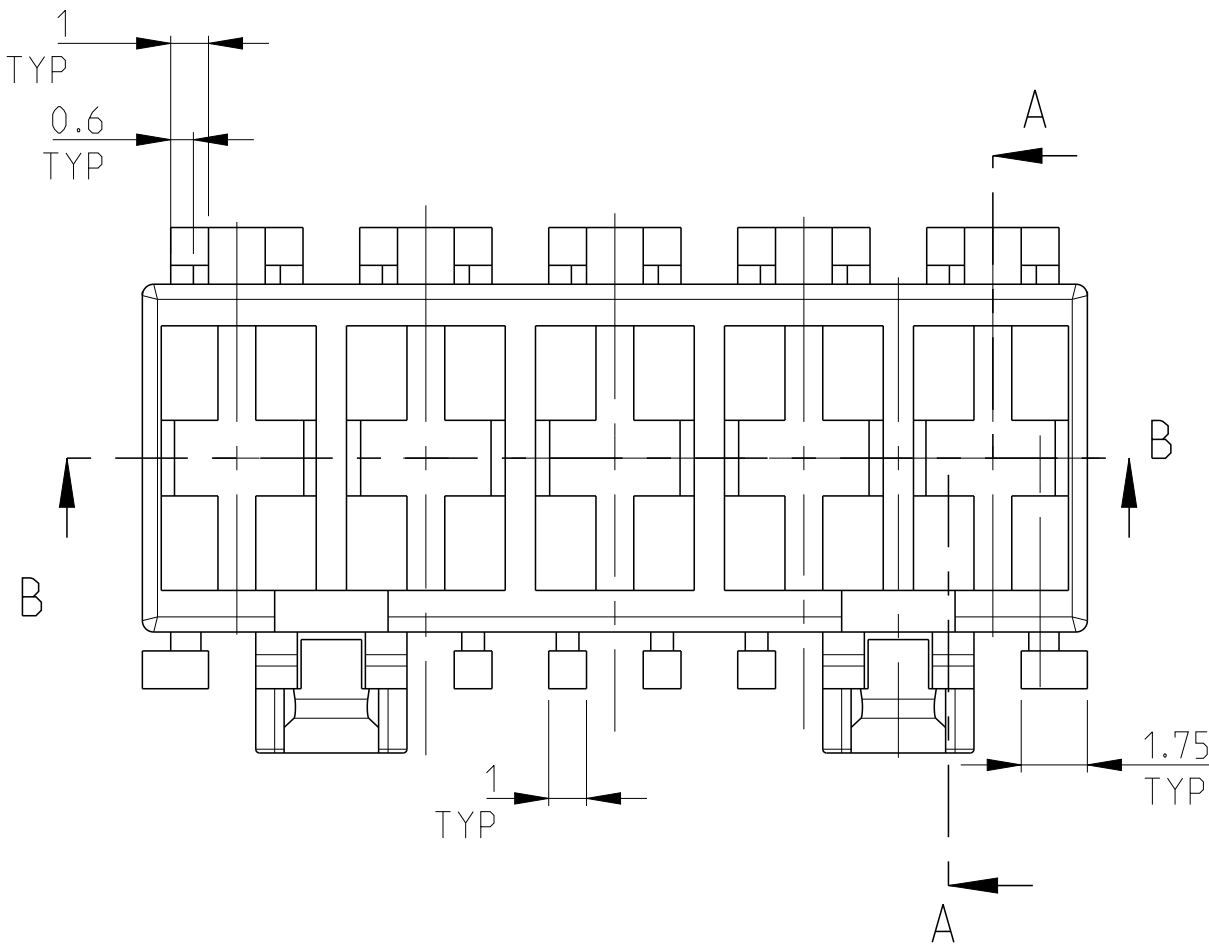


SECTION A-A / Schnitt A-A

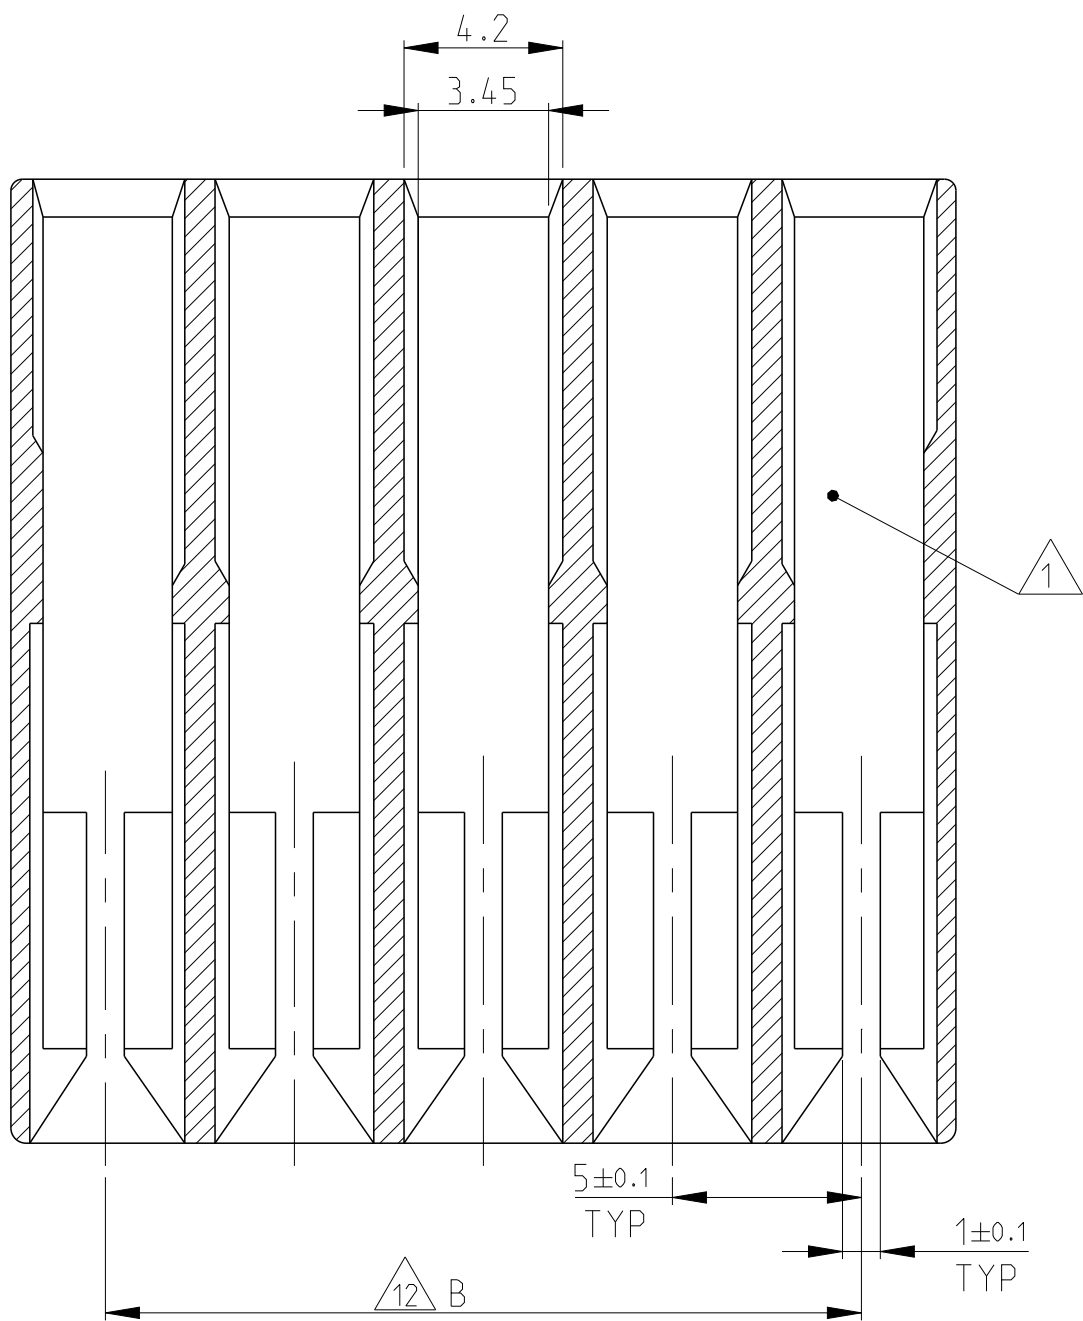


SECTION B-B / Schnitt B-B

5 POSITION
STD. TIMER MARK-II HOUSING

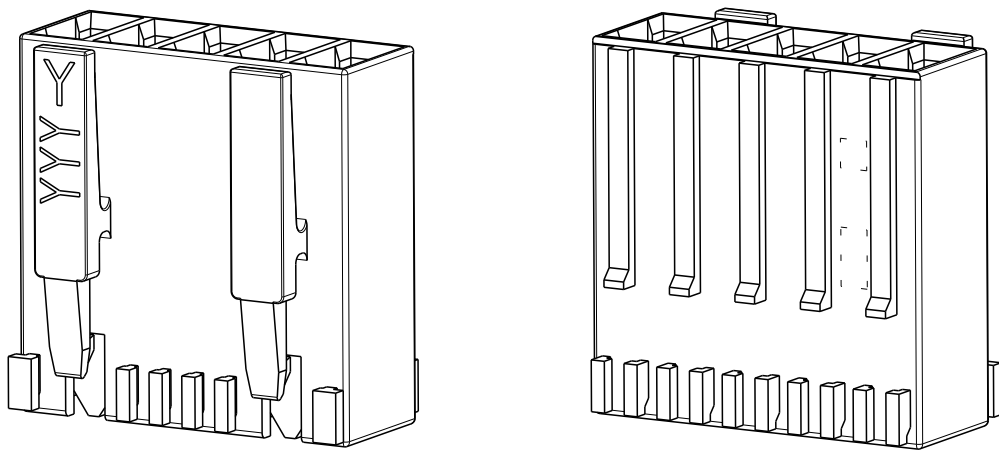


SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Kishor M	18-10-07	 TE Connectivity		
DIMENSIONS:		CHK K.Munz	18-10-07			
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD Th. Klenner	18-10-07	NAME		
		PRODUCT SPEC		STANDARD TIMER HSG. RAST 5 MARK II		
	0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.2 3 PLC ±0.2 4 PLC ±0.2 ANGLES ±°	APPLICATION SPEC		Standard Timer Gehäuse RAST 5 Mark II		
		-		SIZE		
MATERIAL		WEIGHT	-	CAGE CODE		
SEE TABLE		Customer Drawing		DRAWING NO.		
SHEET 2 OF 3		-		A 1 00779 ©=1241961		
				RESTRICTED TO		
				SCALE		
				5:1		
				SHEET		
				1 OF 3		
				REV		
				C39		


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION
© COPYRIGHT 2011	ALL RIGHTS RESERVED.

ONLY 5-1241961-7, 1-1241961-9, 7-1241961-7

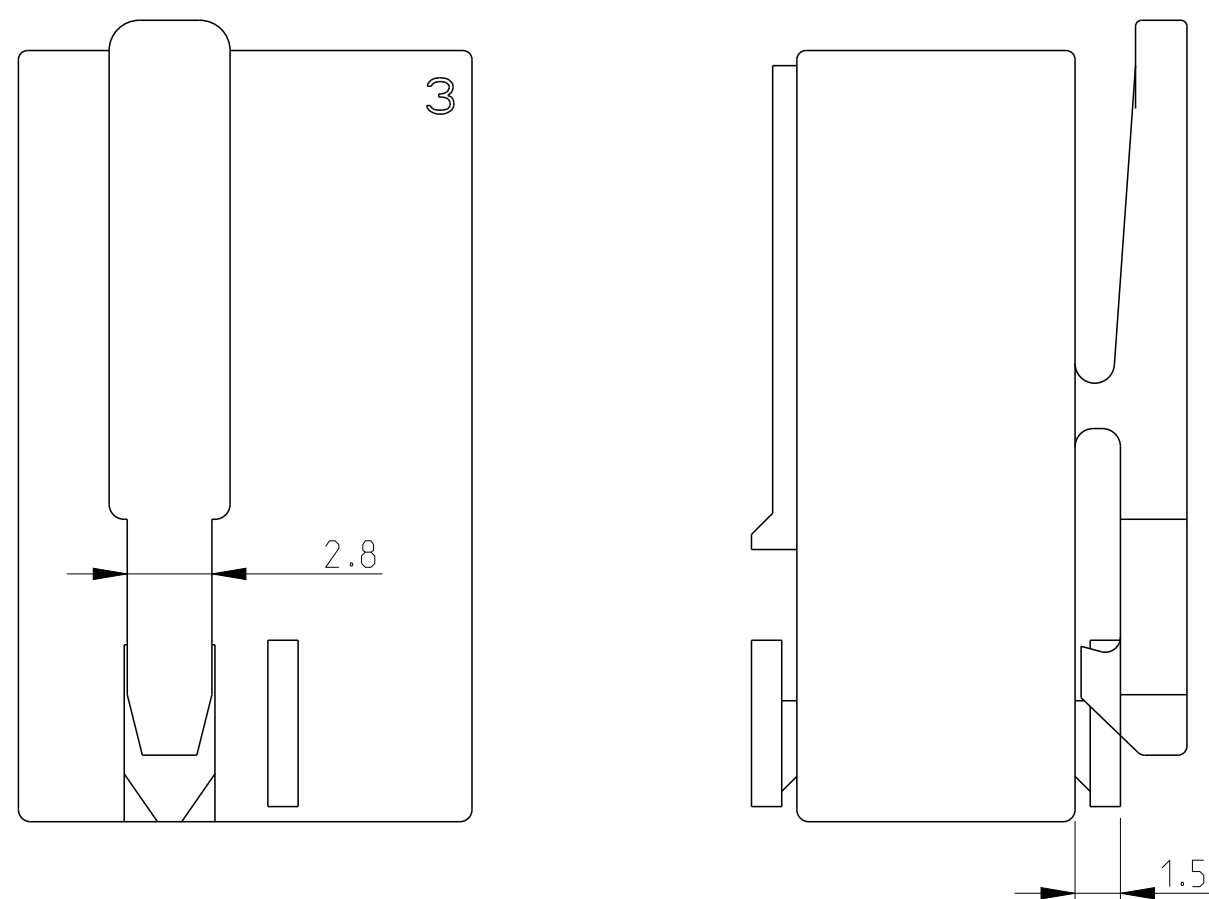

ALL OTHER DIMENSIONS SEE SHEET 1 OF 3

KEY LAYOUT DESCRIPTION

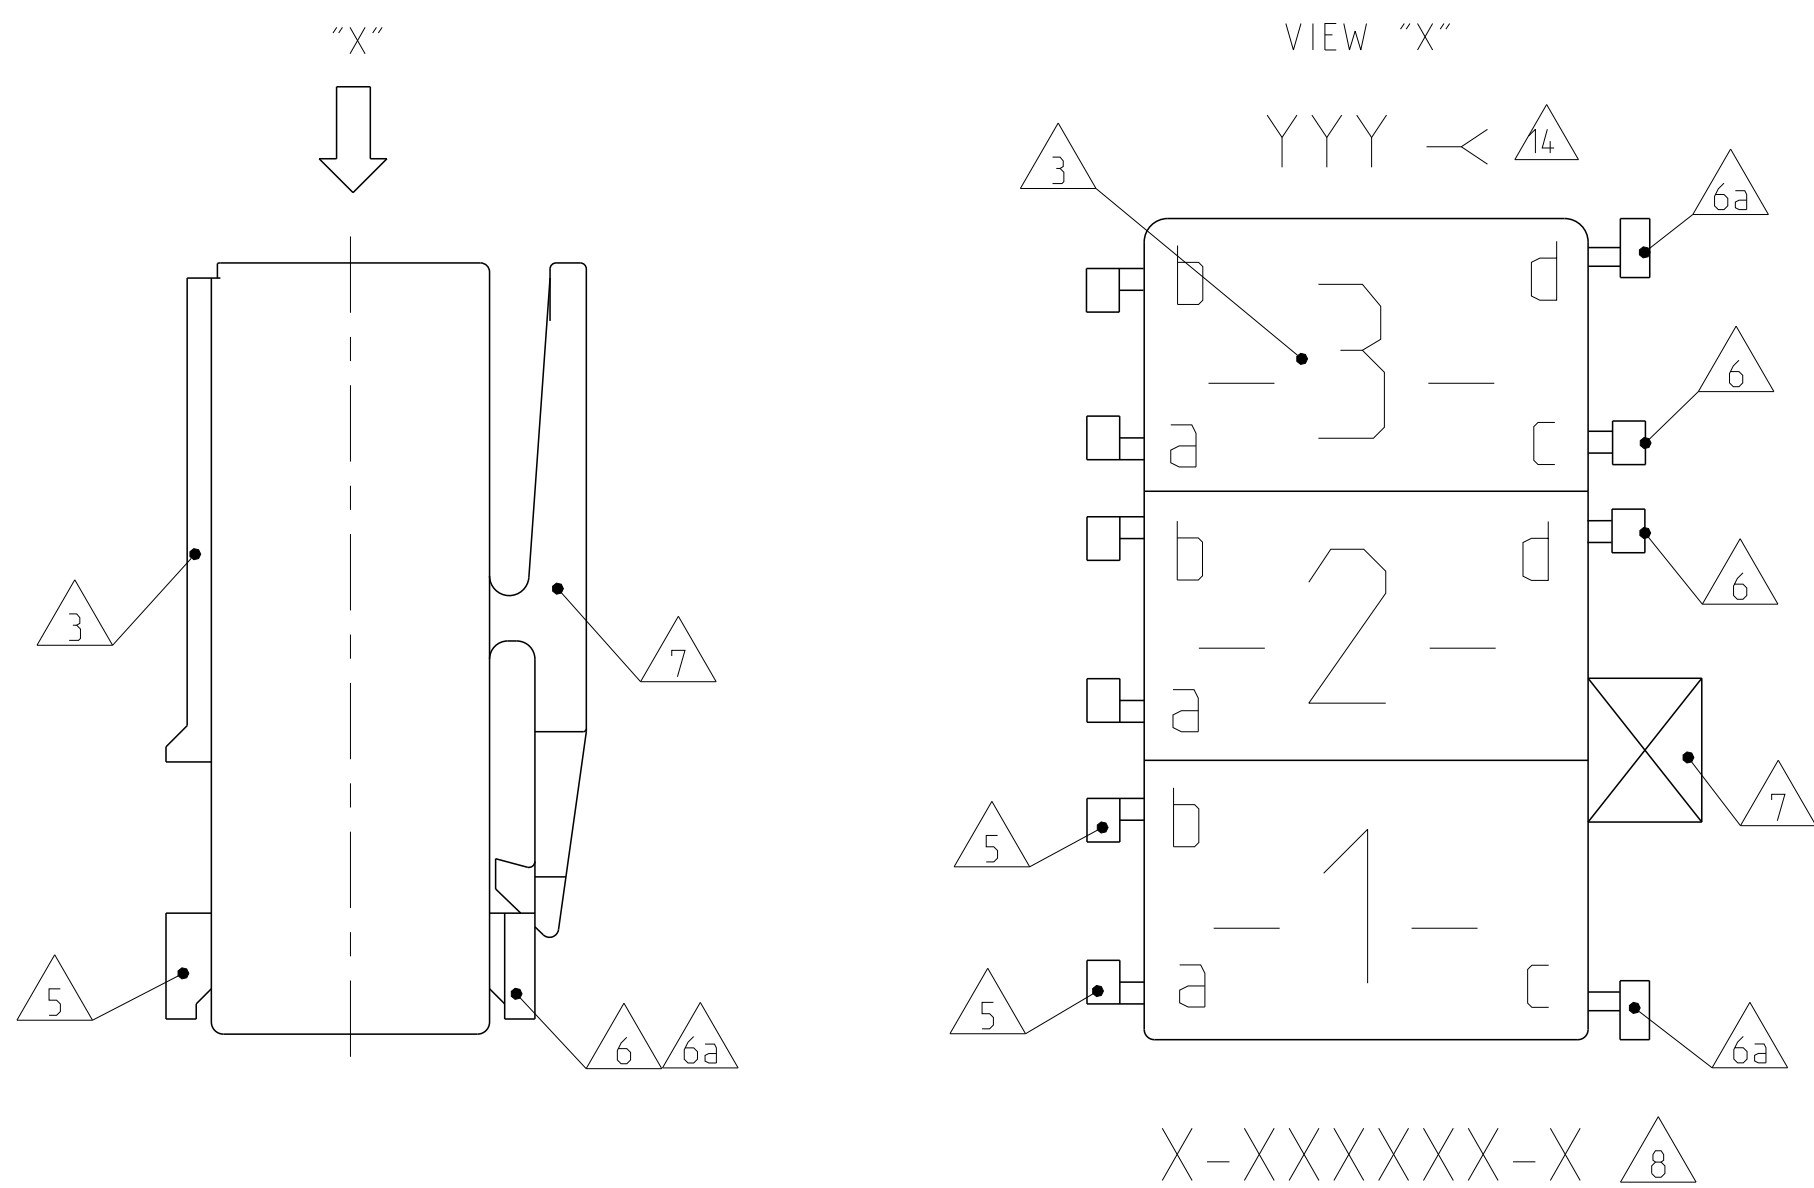

SPECIAL VERSION: UL94 VO & GWT 750 NF & CTI 350								
5-1241961-7	3	6	1	15	10	PA66	NATURAL	A
1-1241961-9	3			15	10		NATURAL	A
7-1241961-7	3			15	10		NATURAL	A

SPECIAL VERSION: UL94 V0 & GWT 750 NF								
2322164-1	4	4	0.5	20	15	PA66	NATURAL	1


SPECIAL VERSION: UL94 V2 & GWT 750 NF									
6-2178575-7	3	4	0.5	15	10	PA6 GF15	13	NATURAL	A

SPECIAL VERSION: UL94 V0 & GW T 750 NF									
△15	3-2178412-7	3	6	1	15	10	UL94 V0 & GW T 750 NF PA66 △13	NATURAL	1
△15	4-2178412-7	3			15	10		NATURAL	1
△15	8-2178412-2	2			10	5		NATURAL	1

UL94 VO & GWT 750 NF									
	2322917-4	4	4	0.5	20	15	UL94 VO & GWT 750 NF	NATURAL	1
	2322917-2	2			10	5		NATURAL	1
	2315717-1	2	4	0.5	10	5		NATURAL	C
	2315717-2	2			10	5		NATURAL	C
	2315717-3	2			10	5		NATURAL	C
	2315717-4	4			20	15		NATURAL	C
	2315717-5	4			20	15		NATURAL	C
	2315717-6	3			15	10		NATURAL	C
	2315717-7	3			15	10		NATURAL	C
PART NO.	POS					MATERIAL		COLOUR	REV.

PAY ATTENTION !
DIFFERENT CAVITY GEOMETRY AND LOCKING LATCH OVERHANG
Bitte beachten !
Unterschiedliche Kammergeometrie und Rasthakenüberstand.

FOR 2 POS. AND 3 POS.

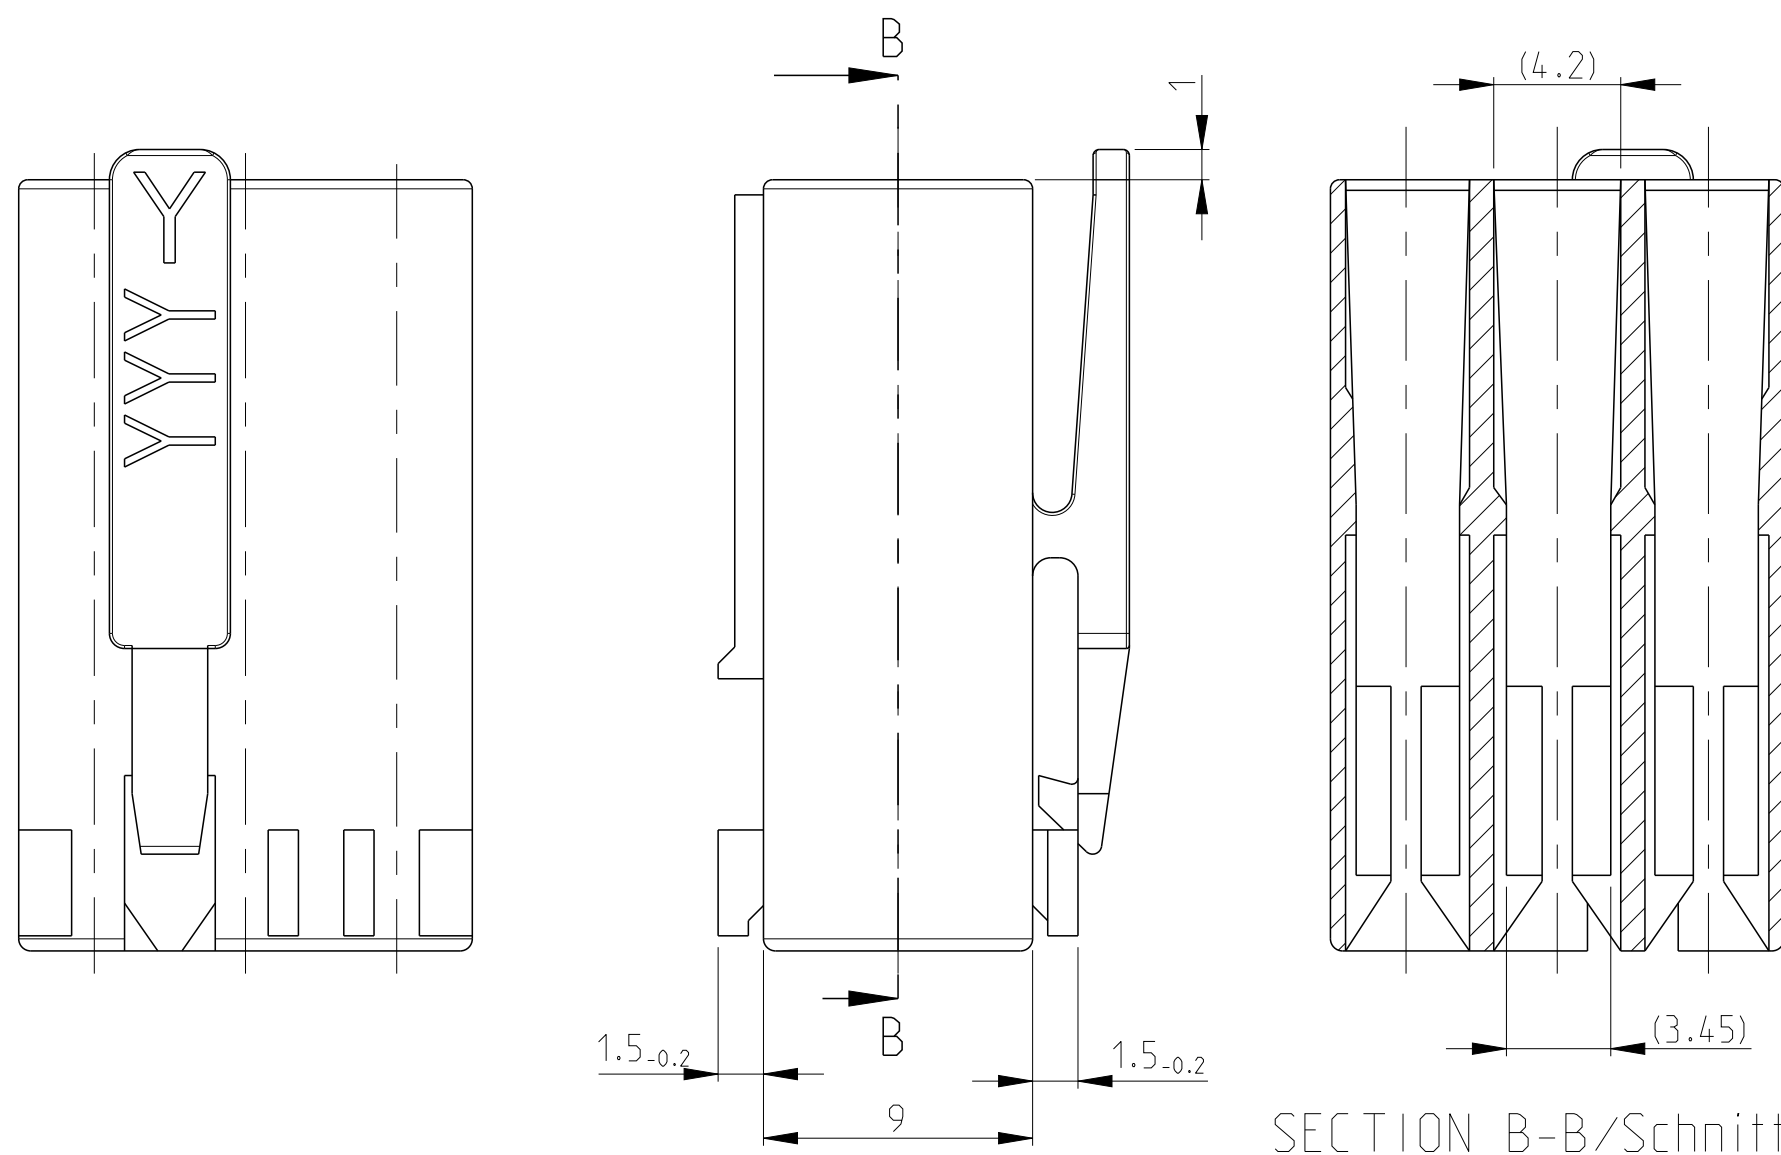


ALL OTHER DIMENSIONS SEE SHEET 1 OF 3
Alle anderen Masse siehe Seite 1 von 3

SPECIAL MATERIAL									
15	1955507-4	4	6	1	20	15	PA66 UL 94 V0	NATURAL	1
15	9-1955506-2	2			10	5		NATURAL	1

15	6-1241961-7	3	4	0.5	15	10	PA 6 UL94V-2	NATURAL 	1
	4-1241961-7	3			15	10	PA 6 UL94V-2	NATURAL 	A
	3-1241961-7	3			15	10	PA 6 UL94V-2	NATURAL 	A
	1-1955422-7	3			15	10	PA 66 UNFILLED UL94 V0	NATURAL	A
	5-1955422-7	3			15	10	PA 66 UNFILLED UL94 V0	NATURAL	A
	4-1955422-3	2	6	1	10	5	PA 66 UNFILLED UL94 V0	NATURAL	A
	2-1241817-3	3	4 or 6	0.5 or 1	15	10	PA 66 UL94 V-2	Green	E
	0-1955422-6	3	4	0.5	15	10	PA 66 UNFILLED UL94 V0	NATURAL	A
	8-1241961-8	3			15	10	PA 6 UL94V-2	natural 	C
	0-1241961-8	3			15	10			A
	8-1241961-3	2			10	5			C
	3-1241961-1	2			10	5	PA 6 UL94V-2	NATURAL 	C
	0-1955422-1	2			10	5	PA 66 UNFILLED UL94 V0	NATURAL	A
PART NO	POS	DIM C 			DIM D 	DIM A 	DIMM B 	MATERIAL	COLOUR Farbe

LOC		DIST		REVISITONS		DESCRIPTION		DATE	DWN	APVD		
P	LTR			SEE SHEET-01								
0-1241959-5	5	4	0.5	25	20	PA 6 UL94V-2	Natural/natur			B		
4-1241959-4	4			20	15					A		
2-1241959-4	4			20	15					B		
0-1241959-4				20	15							
2-1241817-5	5	6	1	25	20	PA 6.6 UL94V-2	Natural/natur	C				
0-1241817-5		4	0.5	25	20		Black/schwarz					
3-1241817-4	4	6	1	20	15		Violet/violett					
2-1241817-4		4	0.5	20	15	Grey/grau						
0-1241817-4		4	0.5	20	15	Natural/natur						
2-1241983-2	2	4	0.5	10	5	PA 6 UL94V-2	Green/grün	C				
1-1241983-2				10	5		Violet/violett					
0-1241983-2				10	5		TARGET RAL 4001					
8-1241983-2				10	5		Yellow/gelb					
5-1241983-3				10	5		Black/schwarz					
6-1241983-2				10	5		Red/rot					
9-1241961-7	3	4	0.5	15	10	PA 6 UL94V-2	Natural/natur	C				
9-1241961-8		4	0.5	15	10							
6-1241961-8		4 or 6	0.5 or 1	15	10							
5-1241961-8		4	0.5	15	10							
4-1241961-8		4 or 6	0.5 or 1	15	10							
7-1241961-8		6	1	15	10							
1-1241961-8		4	0.5	15	10							
3-1241961-8				15	10							
2-1241961-8				15	10							
2-1241961-7		4	0.5	15	10							
1-1241961-7		15	10									
9-1241961-9		15	10									
0-1241961-6		15	10									
3-1241961-3		10	5									
2-1241961-2		10	5									
5-1241961-2	10	5										
4-1241961-3	10	5										
7-1241961-2	10	5										
7-1241961-3	10	5										
6-1241961-3	10	5										
3-1241961-2	10	5										
5-1241961-3	10	5										
6-1241961-2	10	5										
0-1241961-3	10	5										
8-1241961-2	10	5										
9-1241961-2	10	5										
0-1241961-1	10	5										
9-969484-9	3	6	1	15	10	PA 6.6 UL94V-2	Yellow/gelb					
2-969484-8	3	4 or 6	0.5 or 1	15	10	PA 6.6 UL94V-2	Natural/natur	H				
4-969484-8				15	10							
0-969484-8				15	10							
9-969484-7				15	10							
8-969484-7				4	0.5						15	10
7-969484-7				15	10							
6-969484-7				15	10							
5-969484-7				4	0.5						15	10
4-969484-7				15	10							
3-969484-7				4	0.5						15	10
2-969484-7				15	10							
1-969484-7				4	0.5						15	10
0-969484-7				15	10							
9-969484-6				6	1						15	10
8-969484-6				15	10							
7-969484-6	15	10										
6-969484-6	15	10										
5-969484-6	15	10										
4-969484-6	15	10										
3-969484-6	6	1	15	10								
2-969484-6	15	10										
1-969484-6	15	10										
0-969484-6	15	10										
7-969484-3	2	4	0.5	10	5	PA 6.6 UL94V-2	Natural/natur					
6-969484-3				10	5							
5-969484-3				10	5							
4-969484-3				10	5							
3-969484-3				10	5							
2-969484-3				10	5							
1-969484-3				10	5							
0-969484-3				10	5							
9-969484-2				10	5							
8-969484-2				10	5							
7-969484-2				10	5							
6-969484-2				10	5							
5-969484-2				10	5							
4-969484-2				10	5							
3-969484-2				10	5							
2-969484-2	10	5										
1-969484-2	10	5										
0-969484-2	6	1	10	5								
9-969484-1	4	1	10	5								
8-969484-1	4	1	10	5								
7-969484-1	6	1	10	5								
6-969484-1	6	1	10	5								
5-969484-1	6	1	10	5								
4-969484-1	6	1	10	5								
3-969484-1	4	0.5	10	5								
2-969484-1	4	0.5	10	5								
1-969484-1	4	0.5	10	5								
0-969484-1	4	0.5	10	5								
PART NO	POS.	DIM C	DIM D	DIM A	DIM B	MATERIAL	COLOUR	REV				

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN Kishor M 18-10-07	 TE Connectivity					
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK K.MUNZ 18-10-07		NAME STANDARD TIMER HSG. RAST 5 MARK II Standard Timer Gehaeuse RAST 5 Mark II				
mm				Th. Klenner 18-10-07						
				PRODUCT SPEC 108-18049						
				APPLICATION SPEC						
MATERIAL		FINISH		WEIGHT	SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO	
SEE TABLE		-		-	A1		00779	G=1241961	-	
SHEET 2 OF 3		-		Customer Drawing			SCALE	5:1	SHEET 2 OF 3	REV 3

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOC

DIST

P

LYR

REVISIONS

DESCRIPTION

DATE

DWN

APVD

SEE SHEET-01

2 POSITION VARIANTS

2.00

0-969484-1

2.14

1-969484-1
2315717-2

2.13

2-969484-1

2.12

3-969484-1 OBSOLETE

2.11

4-969484-1

2.10

5-969484-1 OBSOLETE

2.09

6-969484-1

2.07

7-969484-1 OBSOLETE

2.06

8-969484-1

2.04

9-969484-1 OBSOLETE

2.03

0-969484-2

2.02

1-969484-2 OBSOLETE

2.08

2-969484-2

2.21

3-969484-2

2.99

4-969484-2
2315717-1

2.20

5-969484-2

2.19

6-969484-2

2.18

7-969484-2

2.17

8-969484-2
2315717-3

2.16

9-969484-2

2.31

0-969484-3

2.15

1-969484-3 OBSOLETE

2.05

2-969484-3 OBSOLETE

2.30

3-969484-3 OBSOLETE

Ohne/None

4-969484-3

Ohne/None

5-969484-3

Ohne/None

6-969484-3

Ohne/None

7-969484-3 OBSOLETE

Ohne/None

5-1241961-2

Ohne/None

0-1241961-1

PA6

2-1241961-2

PA6

3-1241961-2

PA6

6-1241961-2

PA6

7-1241961-2

PA6

8-1241961-2
8-2178412-2

PA6

9-1241961-2

PA6

0-1241961-3

PA6

3-1241961-3 OBSOLETE

PA6

4-1241961-3

PA6

5-1241961-3

PA6

6-1241961-3

PA6

7-1241961-3

PA6

6-1241983-2

PA6

8-1241983-2

PA6

5-1241983-3

PA6

0-1241983-2

PA6

1-1241983-2

PA6

2-1241983-2

PA6

3-1241961-1

PA6

8-1241961-3
2322917-2

PA6

4-1955422-3

PRELIMINARY

9-1955506-2

PRELIMINARY

0-1955422-1

3 POSITION VARIANTS

3.00

0-969484-6 OBSOLETE

3.38

1-969484-6 OBSOLETE

3.18

2-969484-6

3.37

3-969484-6

3.35

4-969484-6 OBSOLETE

3.33

5-969484-6 OBSOLETE

3.32

6-969484-6 OBSOLETE

3.20

7-969484-6

3.10

8-969484-6

3.09

9-969484-6

3.08

0-969484-7 OBSOLETE

3.39

1-969484-7
1-1955422-7 PRELIMINARY

3.31

2-969484-7 OBSOLETE

3.40

3-969484-7

3.99

4-969484-7 OBSOLETE

Ohne/NONE

5-969484-7

3.45

6-969484-7 OBSOLETE

3.47

7-969484-7 OBSOLETE

3.65

8-969484-7

3.48

9-969484-7 OBSOLETE

3.66

0-969484-8

Ohne/NONE

1-969484-8 OBSOLETE

Ohne/NONE

2-969484-8

PA6

9-1241961-9

PA6

3-1241961-8

PA6

9-969484-9

PA6

4-1241961-8

PA6

5-1241961-8

4 POSITION VARIANTS

0-1241959-4

0-1241817-4

2-1241959-4

4-1241959-4
2315717-4

4-1241959-4

0-1955507-4
PRELIMINARY

0-2315717-5

2-1241817-4

3-1241817-4

2322164-1
2322917-4

0-1241959-5

0-1241817-5

2-1241817-5

2-1241817-5

5 POSITION VARIANTS

0-1241961-6

8-1241961-8

2-1241961-7

5-1241961-7

1-1241961-8

0-1241961-8

3-1241961-7

2-1241817-3

03-K

2-1241817-3

PA6

0-1241961-8

03-F

3-1241961-7

03-I

4-1241961-7

03-G

5-1955422-7

03-I

1-1241961-9

03-G

0-1955422-6

03-G

6-2178575-7

0-1241961-6

8-1241961-8

2-1241961-7

5-1241961-7

1-1241961-8

0-1241961-8

3-1241961-7

2-1241817-3

03-K

2-1241817-3

PA6

0-1241961-8

03-F

3-1241961-7

03-I

4-1241961-7

03-G

5-1955422-7

03-I

1-1241961-9

03-G

0-1955422-6

03-G

6-2178575-7

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: Kishor M. 18-10-07

CHK: K. Munz 18-10-07

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.2, 1 PLC ±0.2, 2 PLC ±0.2, 3 PLC ±, 4 PLC ±, ANGLES ±°

MATERIAL: SEE TABLE

SHEET 2 OF 3

APVD: T. Klenner 18-10-07

PRODUCT SPEC: 108-18049

APPLICATION SPEC: -

WEIGHT: -

Customer Drawing

NAME: STANDARD TIMER HSG. RAST 5 MARK II
Standard Timer Gehäuse RAST 5 Mark II

SIZE: A1

CAGE CODE: 00779

DRAWING NO: 1241961

RESTRICTED TO: -

SCALE: 5:1

SHEET 3 OF 3

REV: C39

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-1241961-2](#)