



## Dimensions: mm (in.)

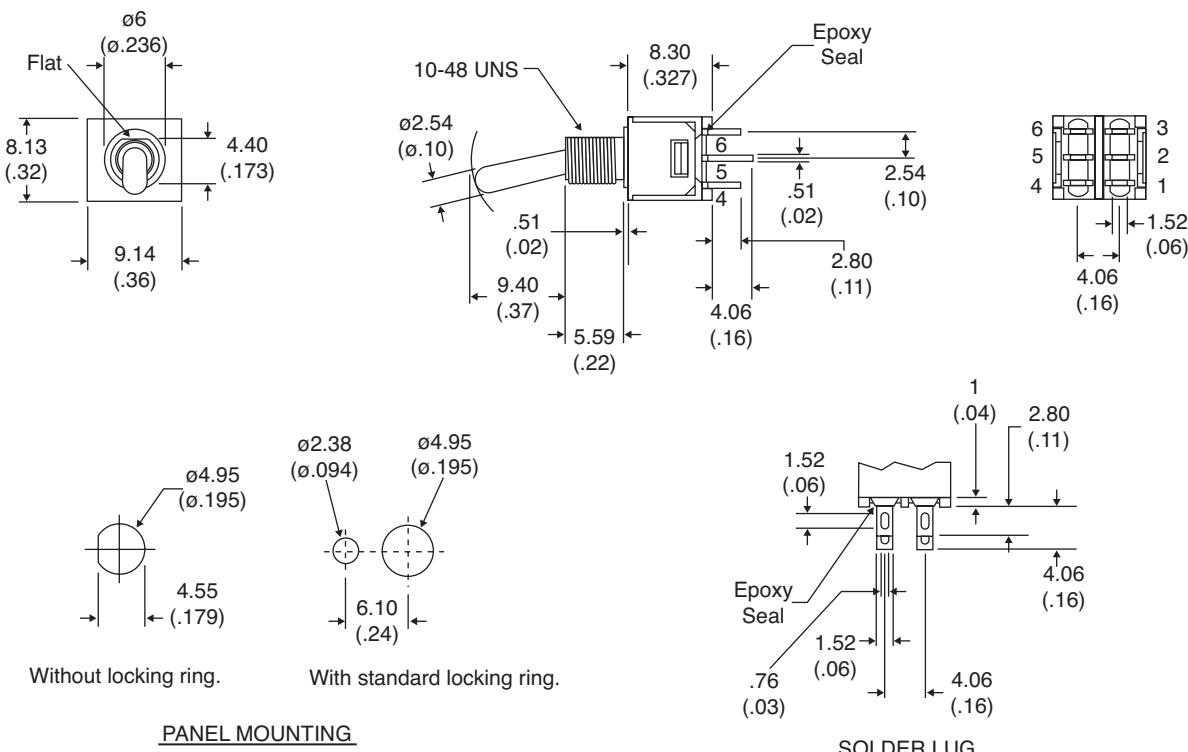

POS.1	POS.2
ON	ON
2-3,5-6	2-1,5-4
2 Comm.	2 Comm.
5 Comm.	5 Comm.
6 Comm.	6 Comm.

**Electrical Specifications:**

- Contact Resistance: 20mΩ max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩ min.
- Dielectric Strength: 1,000 V RMS@ sea level.
- Rating:  
1A / 250 VAC  
3A / 120 VAC or 28 VDC

**Mechanical Specifications:**

- Operating Temperature: -30° C to +85° C

**Note:**

- RoHS Compliant by Exemption

**Materials:**

- Case: Dialyl phthalate (DAP)
- Actuator: Brass, chrome plated
- Bushing: Brass, nickel plated
- Housing: Stainless steel
- Switch Support: Brass, tin plated
- Terminal/Contact: Brass, silver plated

**Toggle Switch**  
108-2MD1T1B1M1QE-EVX

**Mountain**  
**Switch**

Available from Mouser Electronics

[www.mouser.com](http://www.mouser.com) 1-800-346-6873

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mountain Switch:](#)

[108-2MD1T1B1M1QE-EVX](#)