
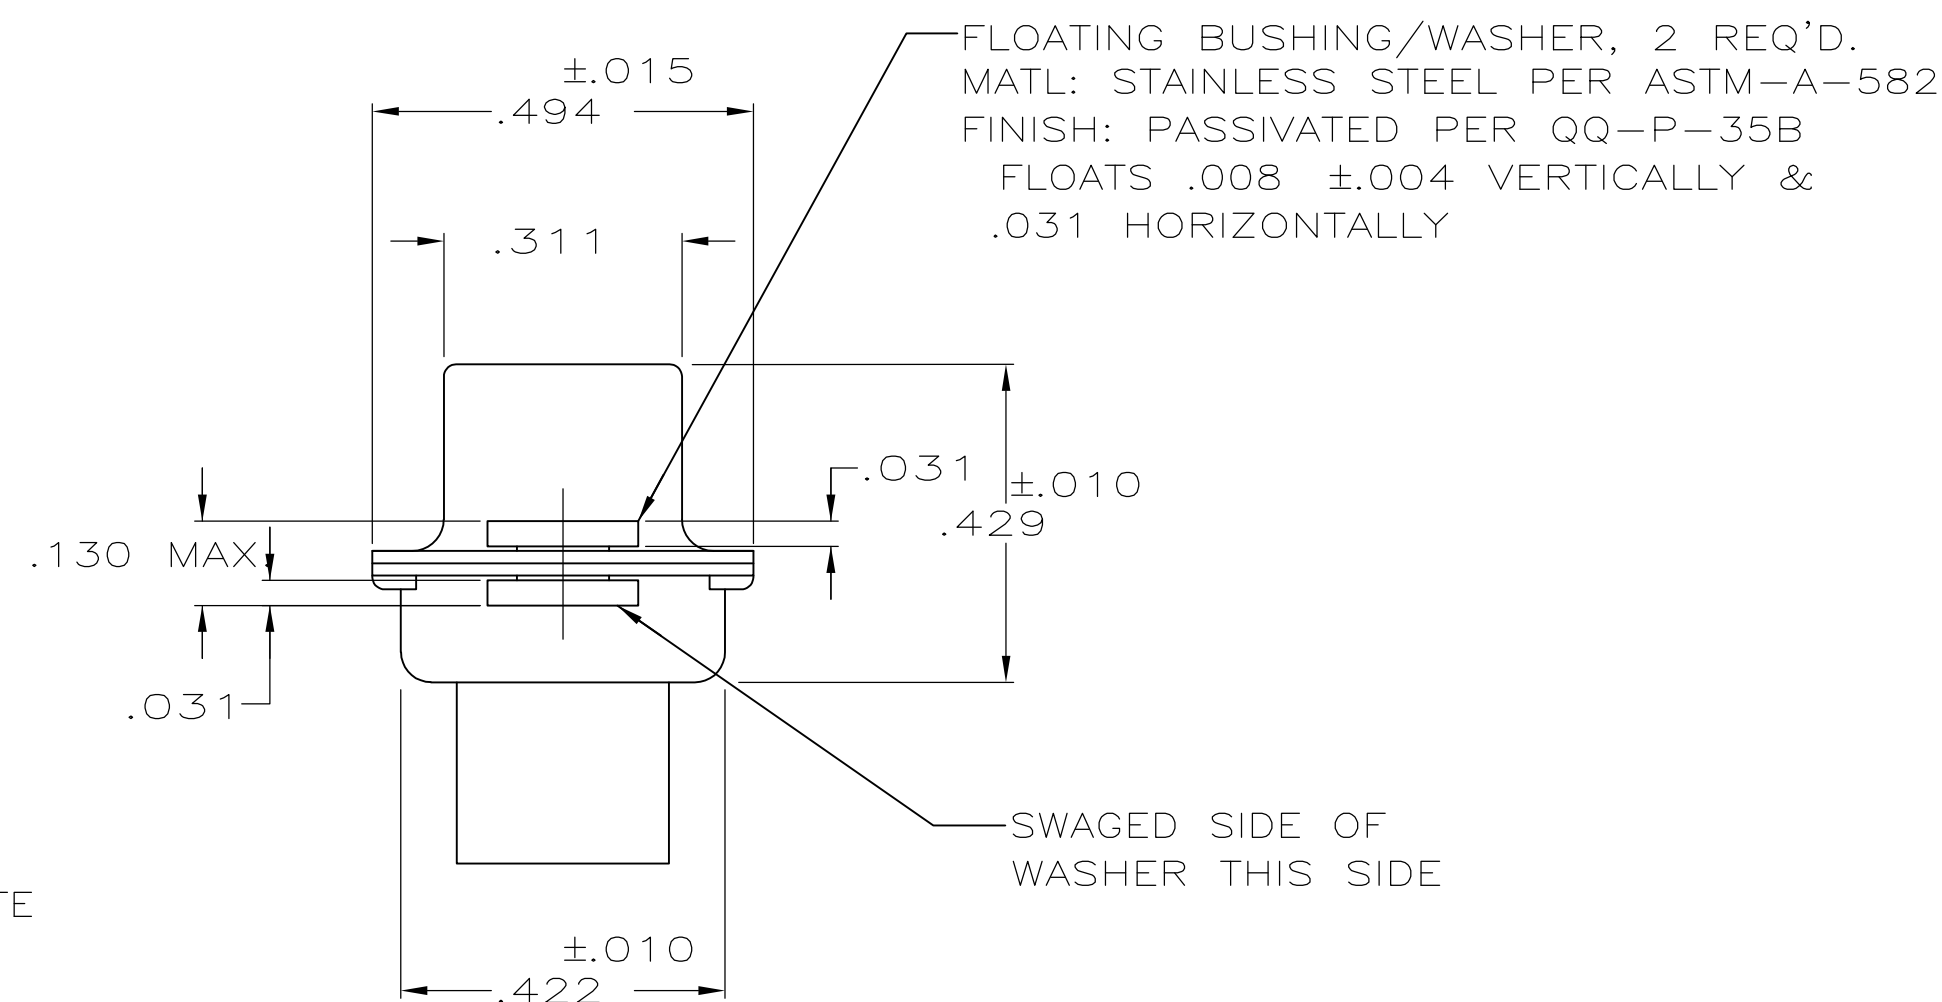
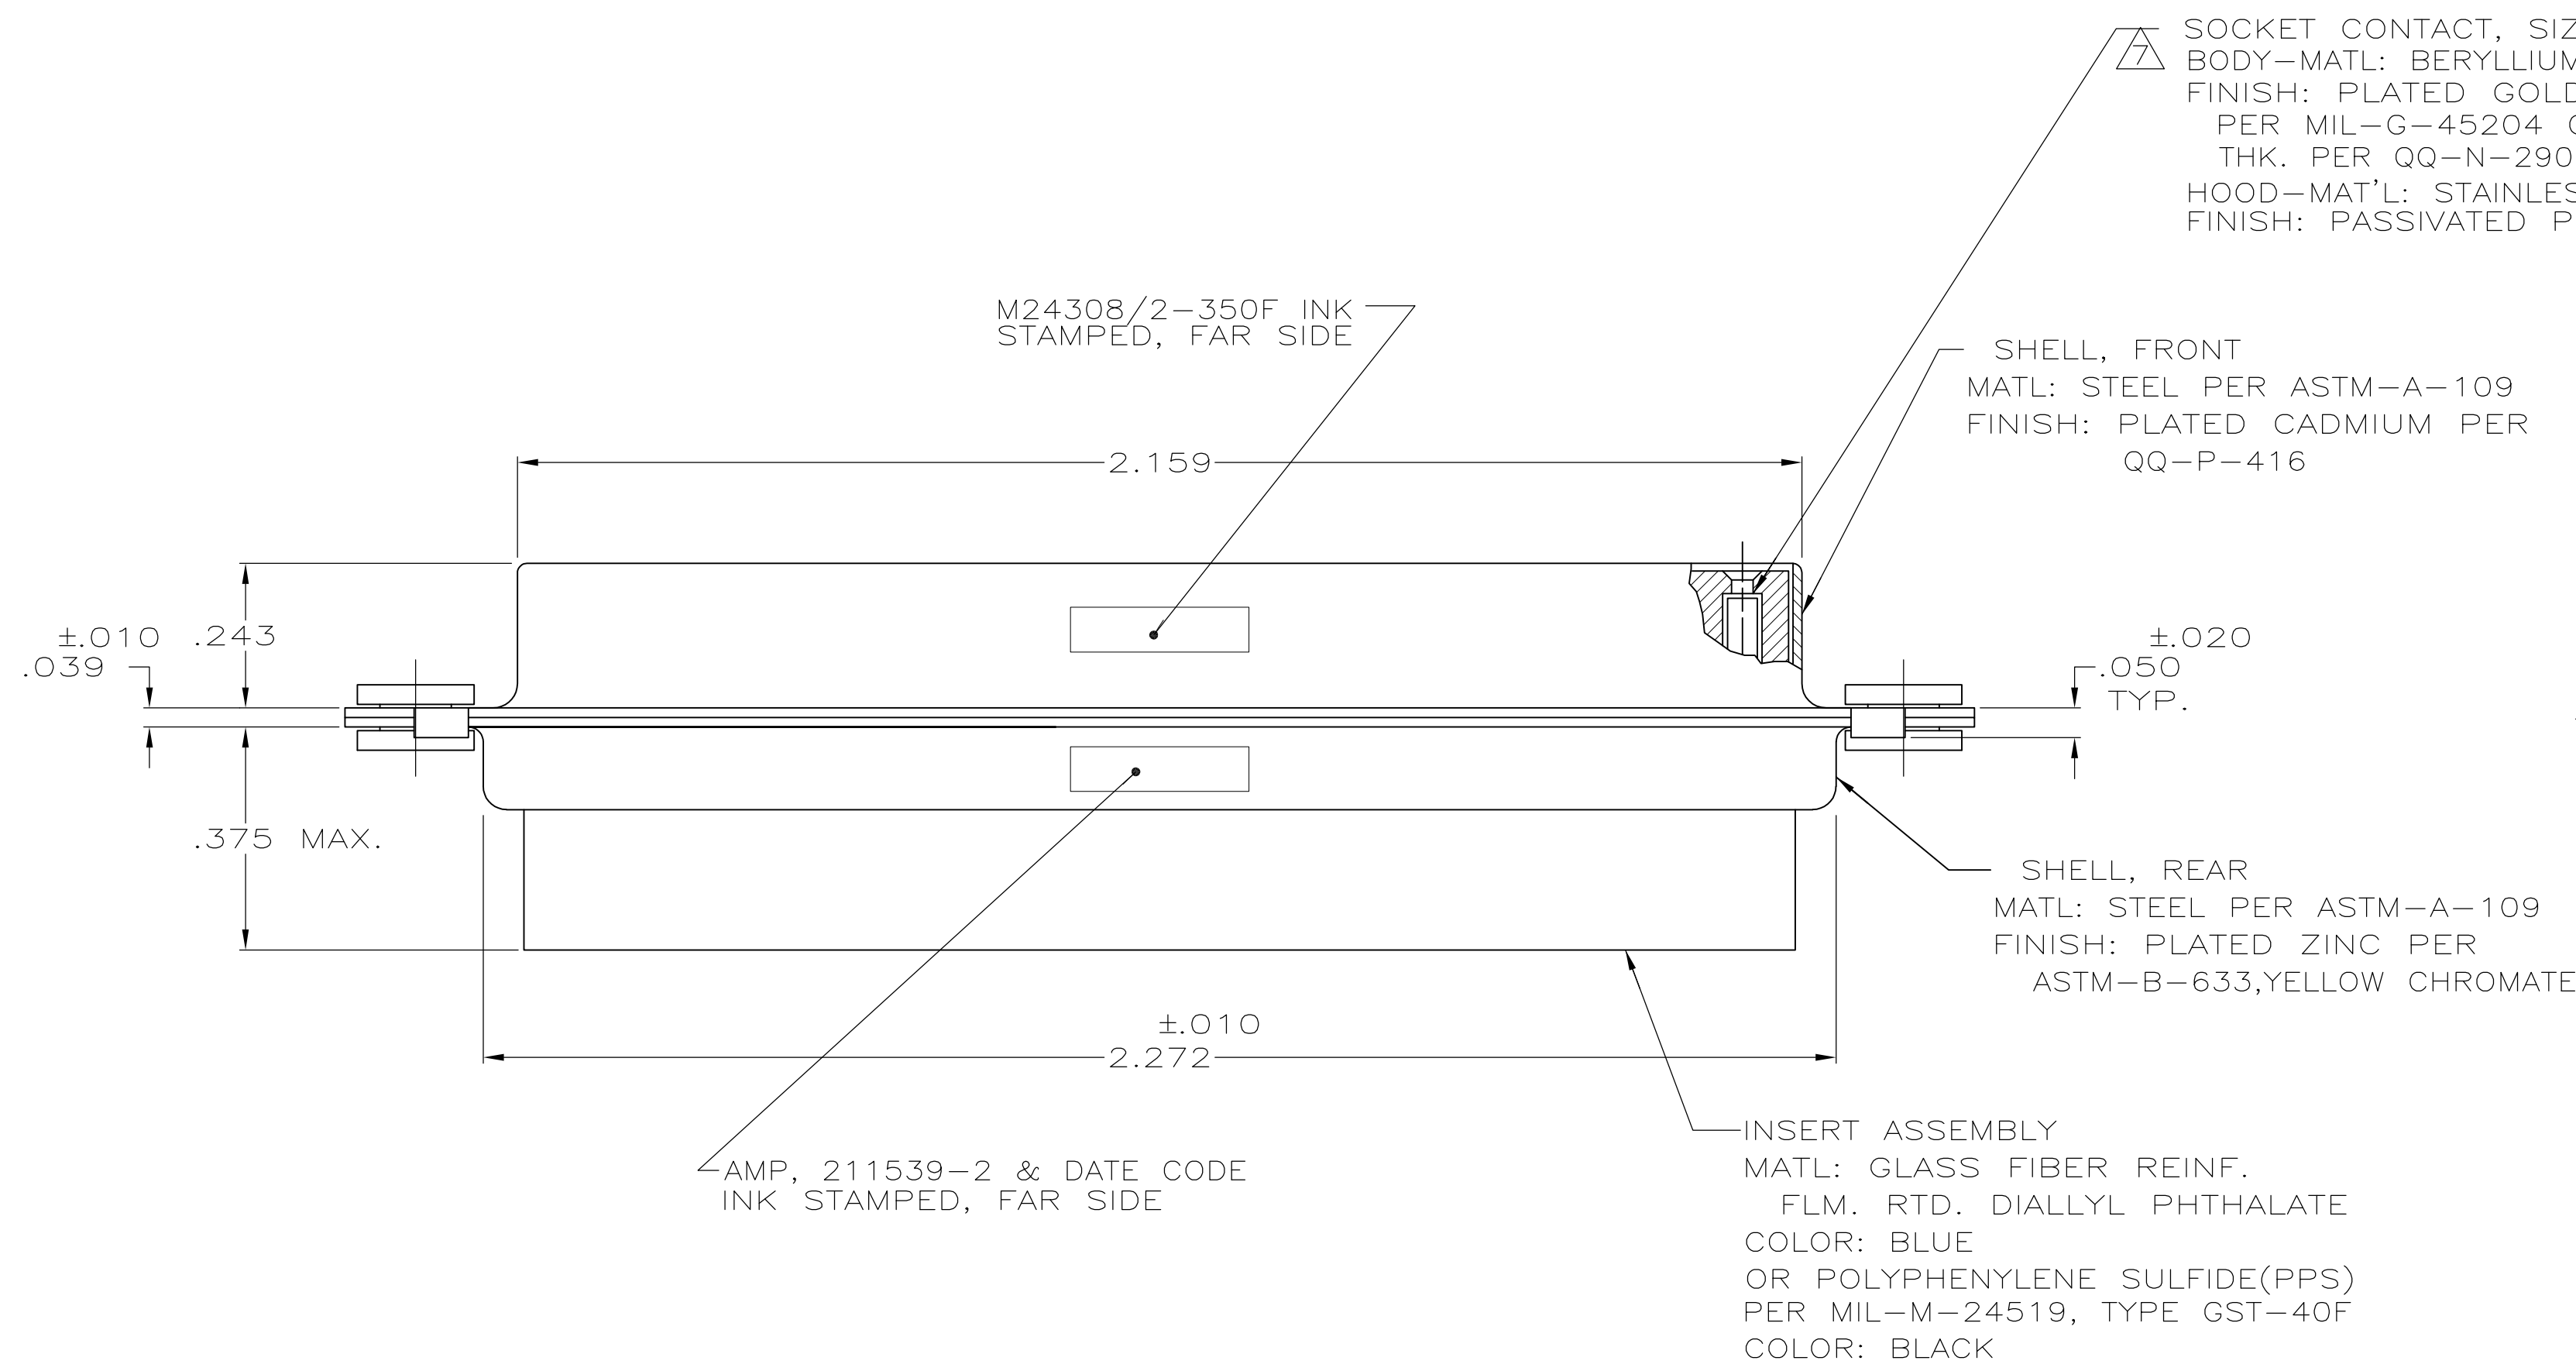
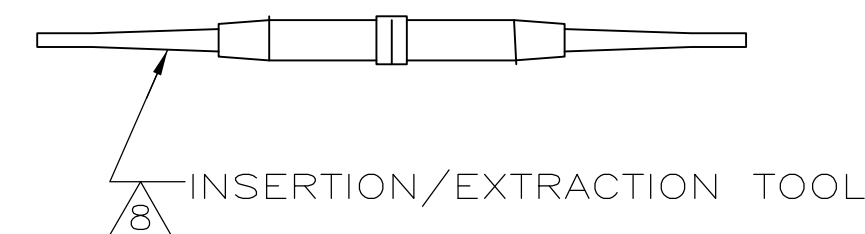


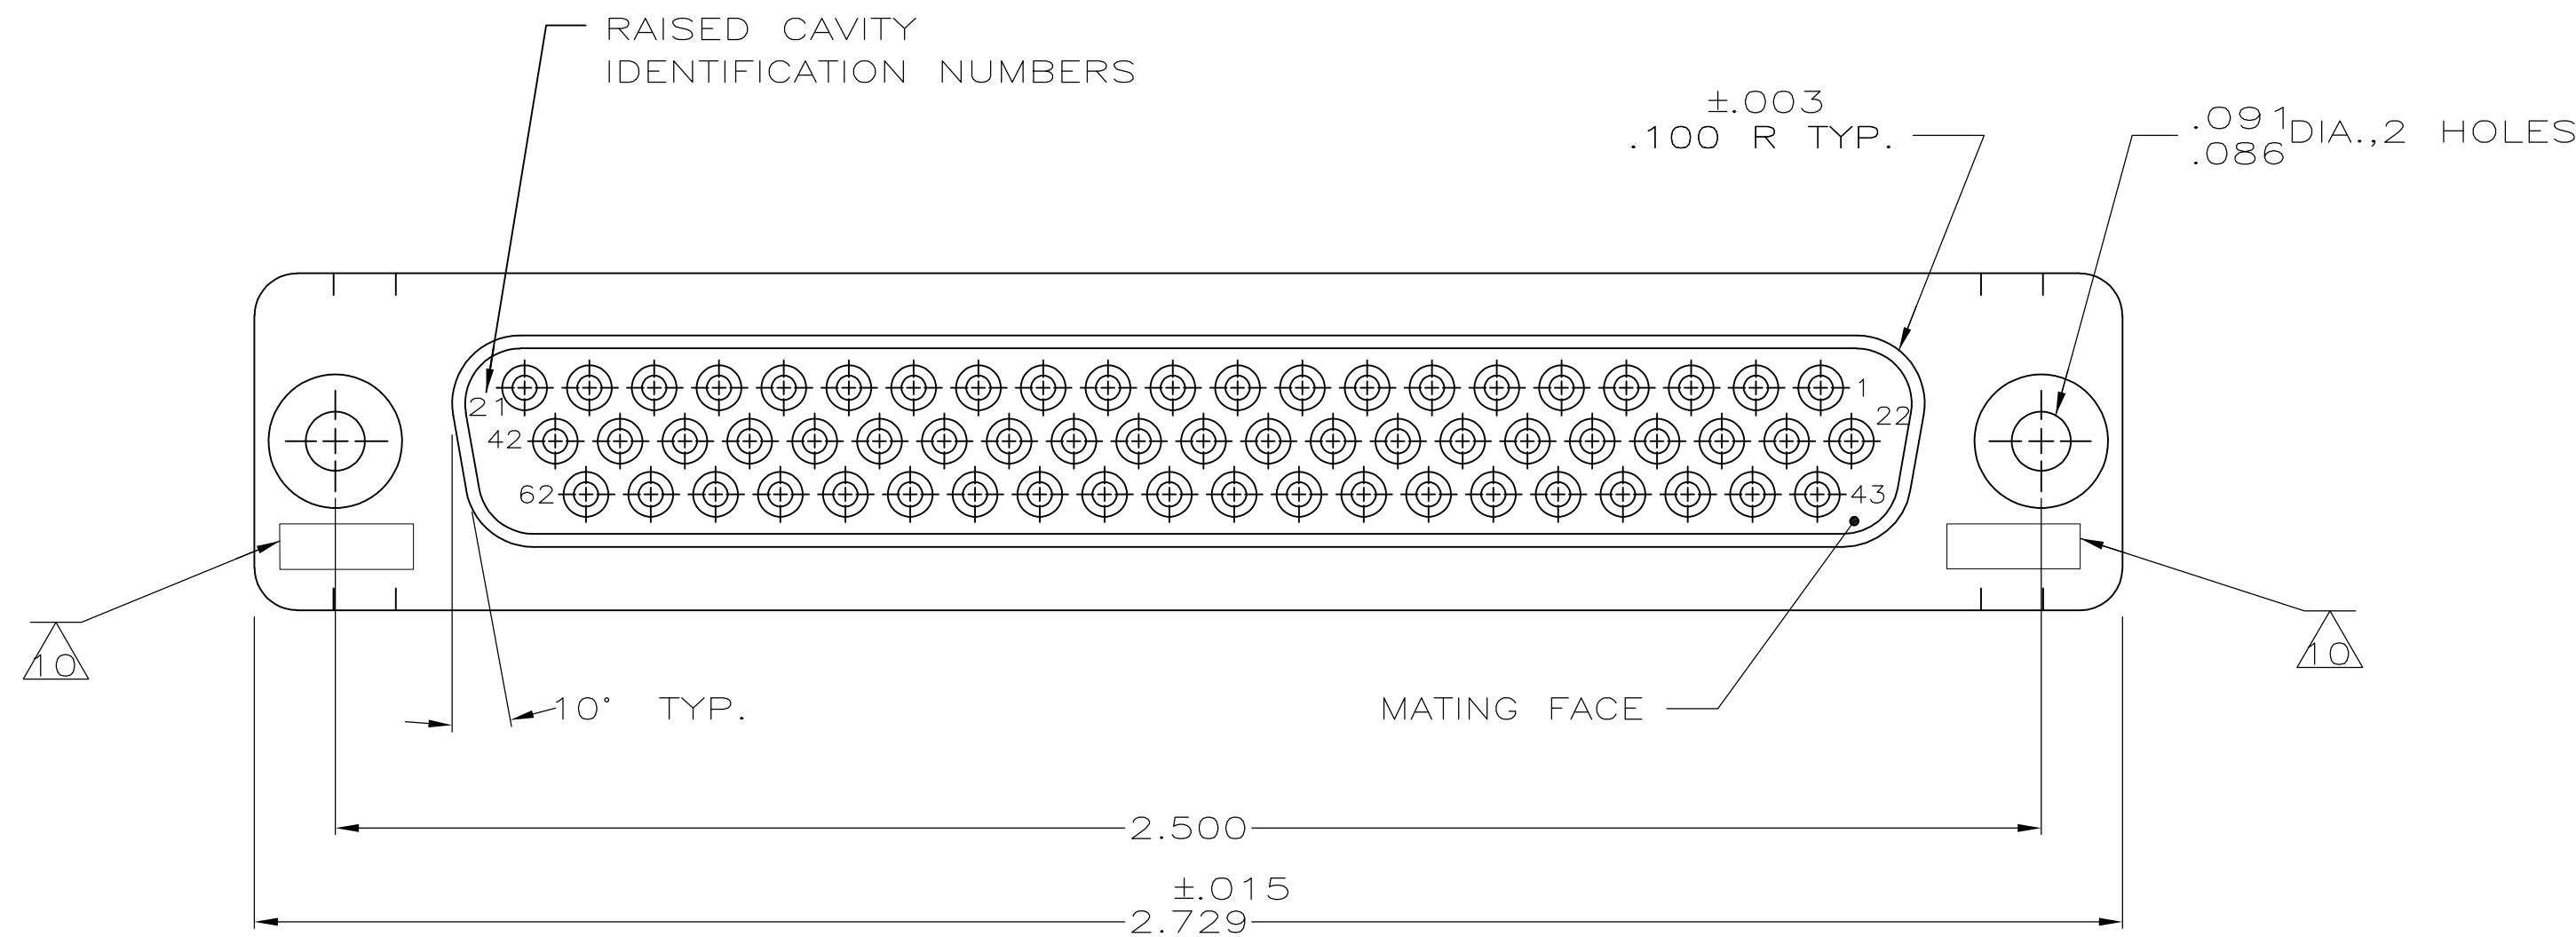

1. THIS RECEPTACLE WILL MATE WITH ANY 62 POSN., SIZE 4 PLUG IN AMPLIMITE SERIES.
2. MAXIMUM WIRE INSULATION TO BE USED WITH THIS RECEPTACLE IS .054 DIA.
3. SST RETENTION CLIPS ARE INCLUDED IN INSERTS.

4 PACKAGE STAMPED M24308/2-490F & AMP P/N 211539-1

5 PACKAGE STAMPED M24308/2-350F & AMP P/N 211539-2


6 PACKAGE STAMPED M24308/2-361F & AMP P/N 211539-3

7 AMP P/N 204351-1; MIL P/N 57-354, INCLUDED IN KIT

8 AMP P/N 91067-1; MIL P/N M81969/1-04

9 CONNECTOR SUPPLIED WITHOUT CONTACTS; SHOWN FOR ILLUSTRATION ONLY.

10 UL/CSA DESIGNATION STAMPED IN THIS AREA, OPTIONAL

SUPSD BY 204542-2 & 91067-1		SAME AS -1 EXCEPT:		6	7	8	211539-3
		SAME AS -1 EXCEPT:		5	7		211539-2
		AS SHOWN		4	9		211539-1
		DESCRIPTION					PART NO
THIS DRAWING IS A CONTROLLED DOCUMENT							
9-20-86		9-20-86		9-20-86		9-20-86	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		Tyco Electronics Corporation		Harrisburg, PA 17105-3608	
INCHES		1 PLC ± -		NAME		RECEPTACLE ASS'Y., AMPLIMITE,	
		2 PLC ± -		PRODUCT SPEC		62 POSN., SIZE 4, SERIES 90,	
		3 PLC ± -		APPLICATION SPEC		W/DUAL FLOAT BUSHINGS	
		4 PLC ± .005		SIZE		CAGE CODE	
		5 PLCS ± -		DRAWING NO		RESTRICTED TO	
MATERIAL		FINISH		WEIGHT		A1 00779 C=211539	
SEE CALLOUT		SEE CALLOUT		—		—	
				CUSTOMER DRAWING		SCALE NTS	
						SHEET 1 OF 1 REV E	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[211539-2](#)