

REV. 0

DCO 170410


COIL: @ 25°C
 RESISTANCE 10,000 OHMS
 NOMINAL VOLTAGE 4.0 mADC
 MUST OPERATE 2.0 mADC
 MUST RELEASE 1.0 mADC MAX, 0.2 mADC MIN

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 15 MS MAX
 RELEASE 10 MS MAX
 CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

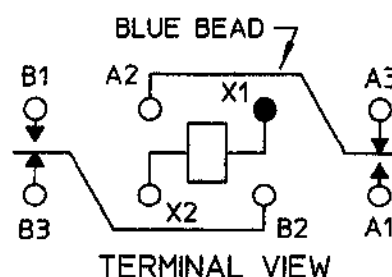

CONTACT RATING: LOW LEVEL TO 2A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 2/23/01

CK. TLG 02-23-01

CII Technologies
 advanced control electronic solutions

CUST. QPL
 CUST. NO. M5757/13-103 REV.

3SAT RELAY

3SAT1320A2

NOT this LATEST REVISION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SAT1320A2](#)