

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	PK	STUD SIZE	DIMENSIONS in.				
			A $\pm .03$	W $\pm .01$	C $\pm .02$	M $\pm .03$	H $\pm .01$
PV14-4RX	-C -M	#4	.87 (22.0)	.25 (6.4)	.19 (4.8)	.75 (19.1)	.12 (3.0)
PV14-6RX	-C -M	#6	.96 (24.4)	.31 (7.9)	.25 (6.4)	.81 (20.1)	.15 (3.8)
PV14-8RX	-C -M	#8	.96 (24.4)	.31 (7.9)	.25 (6.4)	.81 (20.1)	.17 (4.3)
PV14-10RX	-C -M	#10	.96 (24.4)	.31 (7.9)	.25 (6.4)	.81 (20.1)	.20 (5.1)
PV14-14RX	-C -M	1/4"	1.16 (29.5)	.46 (11.7)	.37 (9.4)	.95 (24.1)	.27 (6.9)
PV14-56RX	-C -M	5/16"	1.16 (29.5)	.46 (11.7)	.37 (9.4)	.95 (24.1)	.33 (8.4)
PV14-38RX	-C -M	3/8"	1.25 (31.8)	.53 (13.5)	.42 (10.7)	.99 (25.1)	.39 (9.9)

Notes:


- U.L. Listed and CSA Certified for
 - 600v max. voltage rating
(1000v in signs, fixtures, and luminaires)
 - 18-14 AWG solid or stranded copper wire
and 221°F (105°C) max. temp. rating with
the CT-500, CT-550, CT-1551, CT-1550 installation tools
 - 16-14 AWG solid or stranded copper wire
and 167°F (75°C) max. temp. rating with the
CT-100 installation tools.

- Material:
 - Stamping: .032 (.81) thk copper, tin plated
 - Housing: Vinyl, blue

- Strip length: 5/16 + 1/32 -0

- Package qty.: -C = 100 / -M = 1000
 -L = 50 / -D = 500

- Dimensions in brackets are in millimeters or mm²

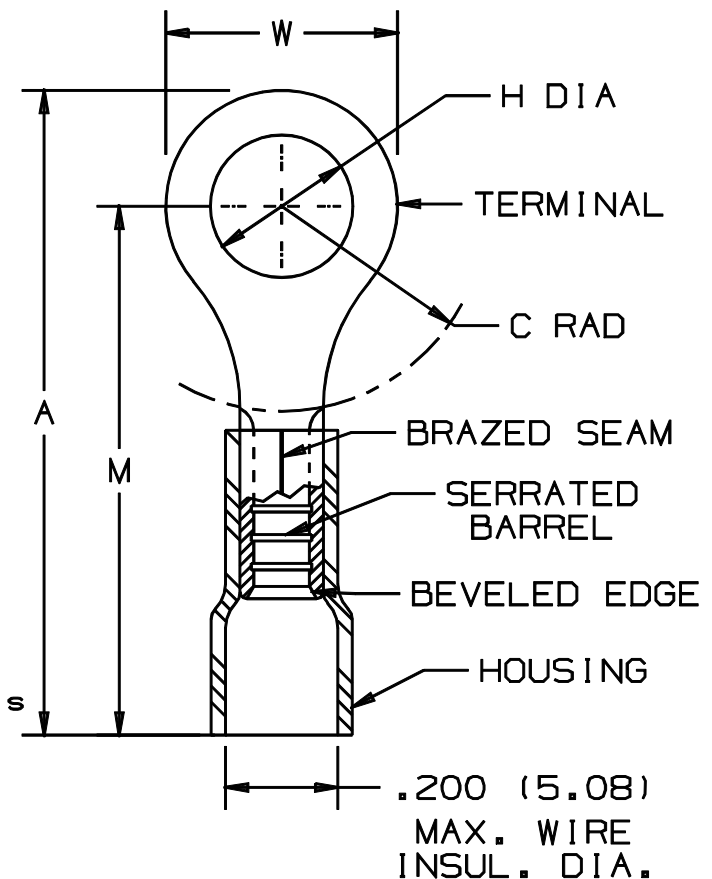

LISTED
587H
E52164



CERTIFIED
LR31212

A41270_04

04	1/01	RM		FILESPEC WAS N41270AA_PCD_03				PANDUIT CORP. TINLEY PARK, ILLINOIS #16-14 BARREL VINYL INSULATED RING TONGUE, .200 (5.08) MAX. WIRE INSULATION DIAMETER
03		JKD		ADDED CT-1551 & CT-1550 TOOLS	07634			
02	9/95	BK	RLS	UPDATED DRAWING	03612	LCA	JM	
1	7-88	DW		REDRAWN WITH REVISIONS			JB	
REV	DATE	BY	CHK	DESCRIPTION	ECN	CUST	PM	DRAWN BY DAW DESIGNED CJH SCALE NONE DRAWING NO. A41270

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[PV14-4RX-C](#) [PV14-8RX-M](#) [PV14-10RX-C](#) [PV14-6RX-C](#) [PV14-6RX-M](#) [PV14-14RX-M](#) [PV14-10RX-M](#) [PV14-8RX-C](#)
[PV14-38RX-L](#) [PV14-14RX-L](#)