
Pomona®

Model 2451A Connector BNC (F), Panel Mount

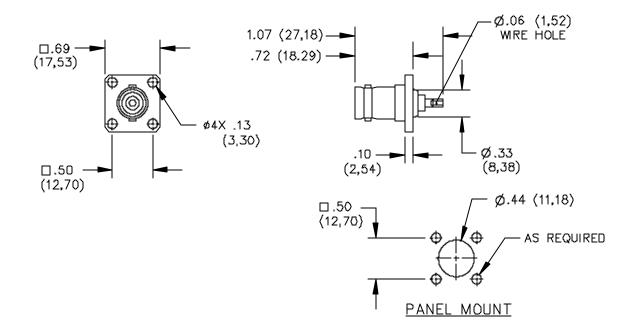

MATERIALS:

Body and Fittings: Brass, Tarnish Resistant Plating Center Contact: Gold Plated Beryllium Copper Dielectric: PTFE Finish: Body and Fittings: Nickel, Tarnish Resistant Center Contact: Gold over nickel

RATINGS:

Operating Temperature: -65°C to +165°C Nominal Impedance: 50 Ohms

ORDERING INFORMATION: Model 2451A

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

 5/23/02 SY/EH/LS
 Sales: 800-490-2361 Fax: 888-403-3360

 Last saved by PN
 Technical Assistance: 800-241-2060

S:\Engineering\Release\DataSheets\FlukeDataSheet\d2451A_1_02.doc

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona: 2451A