
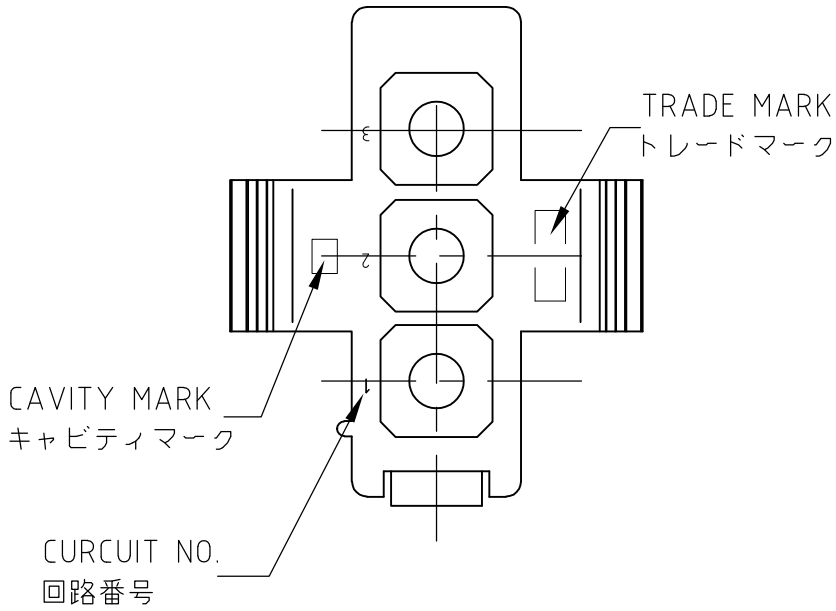
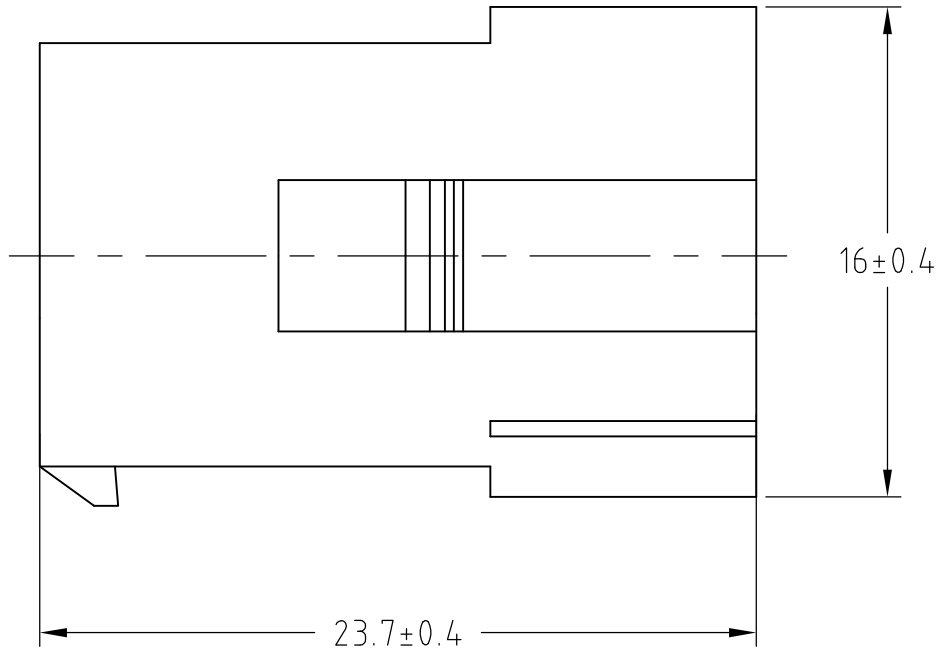


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—		D2	REVISED PER ECO—11—005030	11MAR11	RK	HMR

D


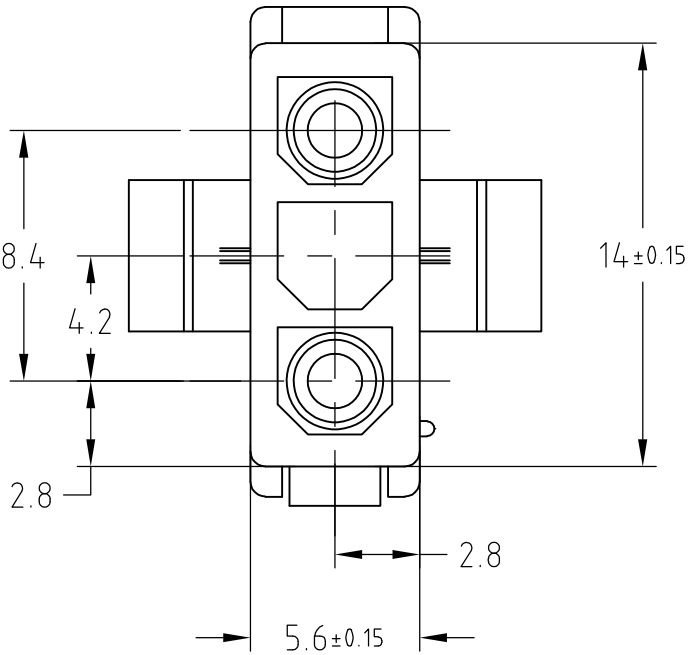


- 注記；
1. 使用端子型番は 170359,170360,170361,170362
 2. 相手ハウジング型番は 172166
 3. 適用パネル板厚：0.8～2.0mm
 4. 取付穴打抜方向とハウジングの挿入方向は同じとする。
 5. 適用製品仕様書：108-5138
 6. 取扱説明書：IS-105J

- NOTE
1. APPLICABLE CONTACT P/N: 170359,170360,170361,170362
 2. MATING HOUSING P/N: 172166
 3. APPLICABLE PANEL THICKNESS:0.8～2.0mm
 4. DIRECTION OF HOLE PUNCHING MUST BE SAME WITH HOUSING INSERTION DIRECTION.
 5. APPLICABLE PRODUCT SPECIFICATION NO. : 108-5138
 6. INSTRUCTION MANUAL: IS-105J

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

C

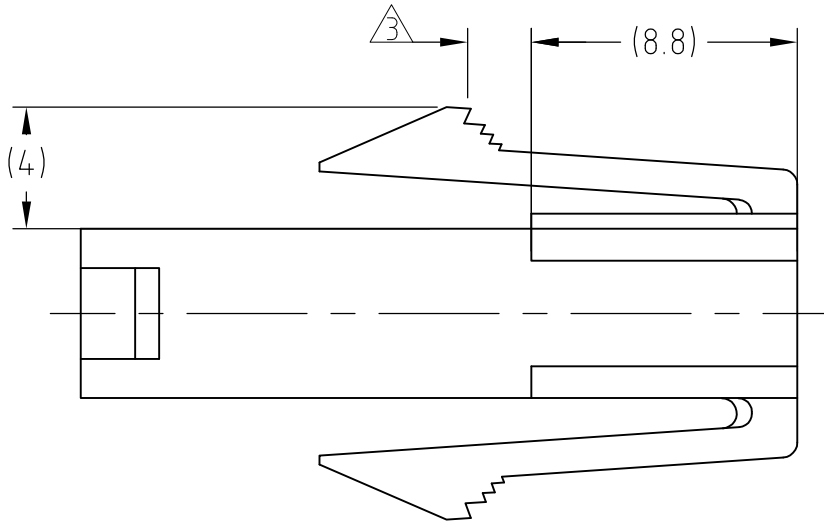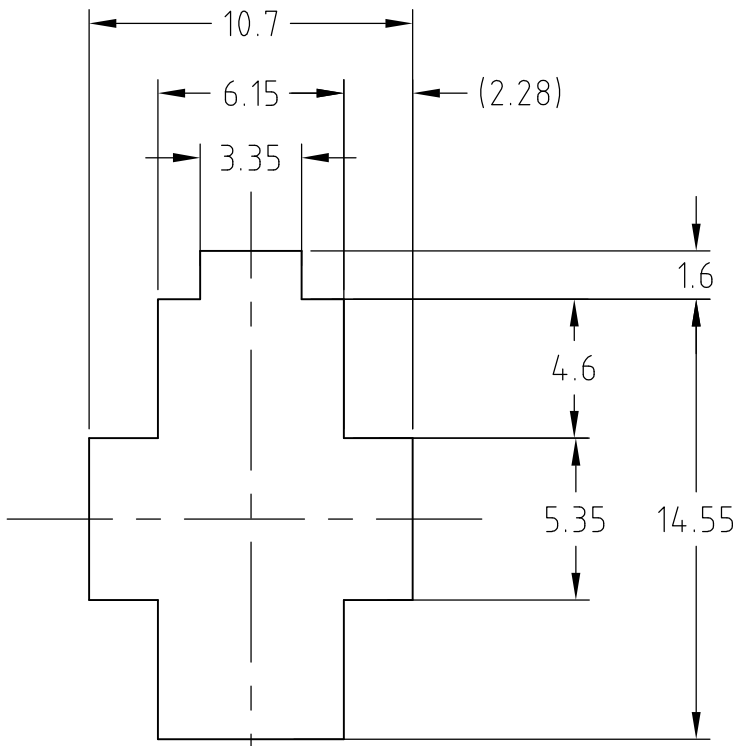

DIMENSION TOLELRANCE IS ±0.20
寸法公差は±0.20

APPLICABLE PANEL HOLE
パネル取付穴

7 OBSOLETE	BLACK 黒	1-172158-9
	BLUE 青	1- ↑ -6
	GREEN 緑	← 1- 5-
	RED 赤	1- ↓ -2
	NATURAL 自然色	172158-1
	COLOR 色	PART NUMBER 部品番号

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.INOMATA 21AUG06		TE Connectivity			
DIMENSIONS: 単位： 耗 mm		CHK N.YAMASAKI 21AUG06					
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD N.YAMASAKI 21AUG06	NAME 名称			
	0 PLC ± -		PRODUCT SPEC 製品規格	SPOS. MINI UNIVERSAL MATE-N-LOCK CAP HOUSING			
	1 PLC ± -		108-5138	3極 ミニユニバーサル(UL94V-0) ロック キャップハウジング (UL94V-0)			
	2 PLC ± -						
	3 PLC ± -						
4 PLC ± -		APPLICATION SPEC 取付適用規格					
ANGLES ± -		—	SIZE	CAGE CODE	DRAWING NO 番号		RESTRICTED TO
MATERIAL 材料 66NYLON(UL94V-0) 66ナイロン(UL94V-0)		FINISH 仕上 —	WEIGHT —	A2	00779	C=172158	—
CUSTOMER DRAWING				SCALE 尺度	4:1	SHEET 1 of 1	REV D2

B

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-172158-6](#)