
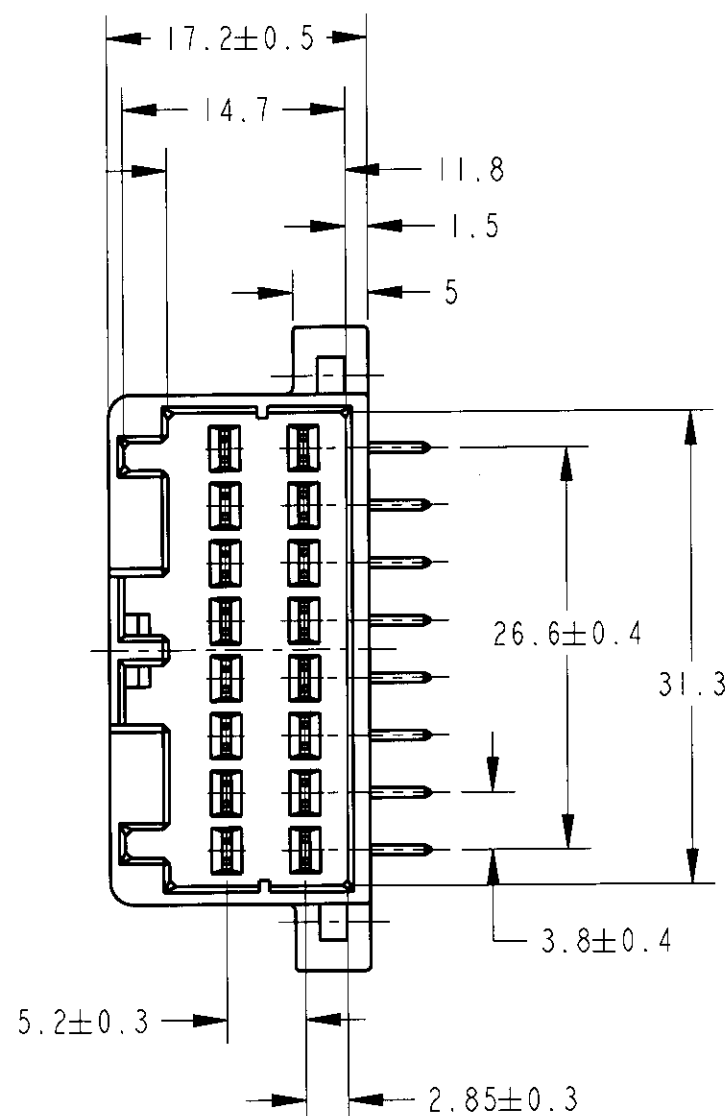


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	ECN	DATE
J	-	0		RELEASED 作成	FJ00-0212-00	7FEB00

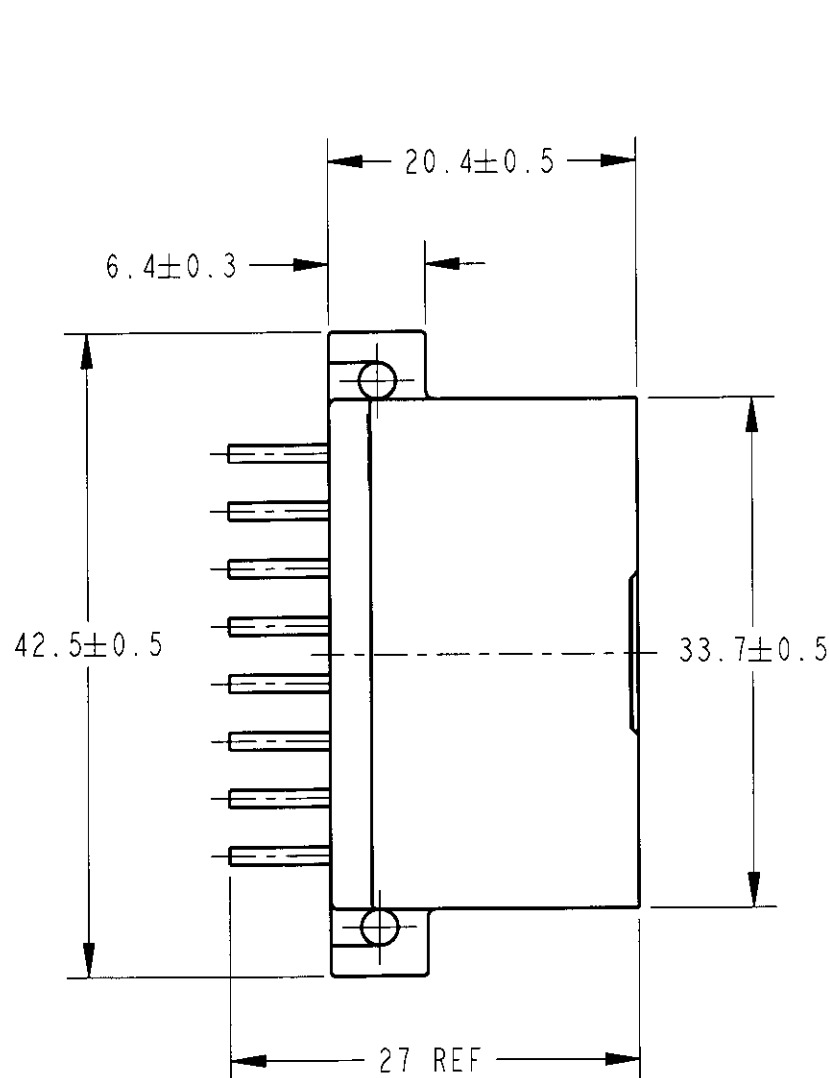



1. APPLICABLE P.C. BOARD THICKNESS : 1.6mm
2. RECOMMENDED MOUNTING SCREW : 3mm DIA, 6mm LENGTH
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS B1115,
B1122 (TIGHTENING TORQUE : 39.2N-cm MAX)
3. MATING HOUSING PART NUMBER : 179093-6

1. 適用プリント基板厚 : 1.6mm
2. 推奨取付けねじ : JIS B1115, B1122タッピングねじ、なべ2種
呼び径3、長さ6mm (締め付けトルク : 39.2N-cm以下)
3. 嵌合相手ハウジング型番 : 179093-6

プリント基板取付け寸法 (公差±0.1)

(MOUNTING DIMENSIONS FOR P.C. BOARD : TOLERANCE ±0.1)

*ピッチ公差は累積しない (NON ACCUMULATE PITCH TOLERANCE)

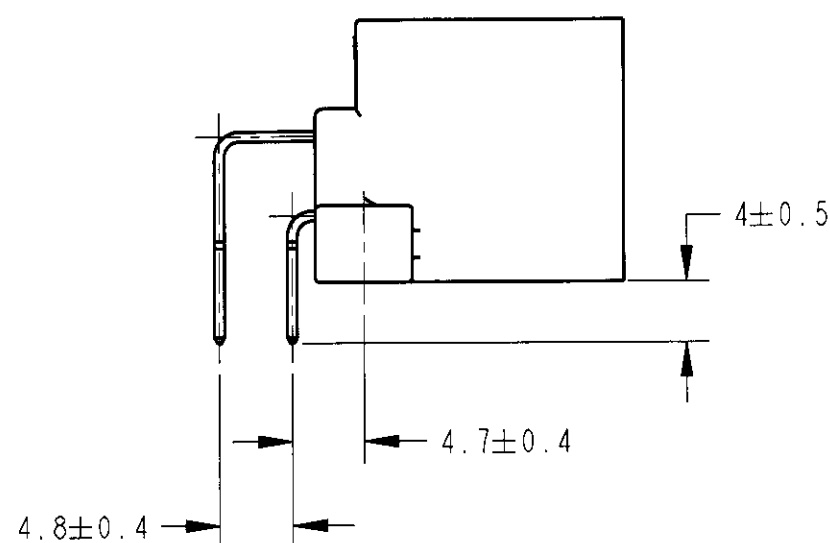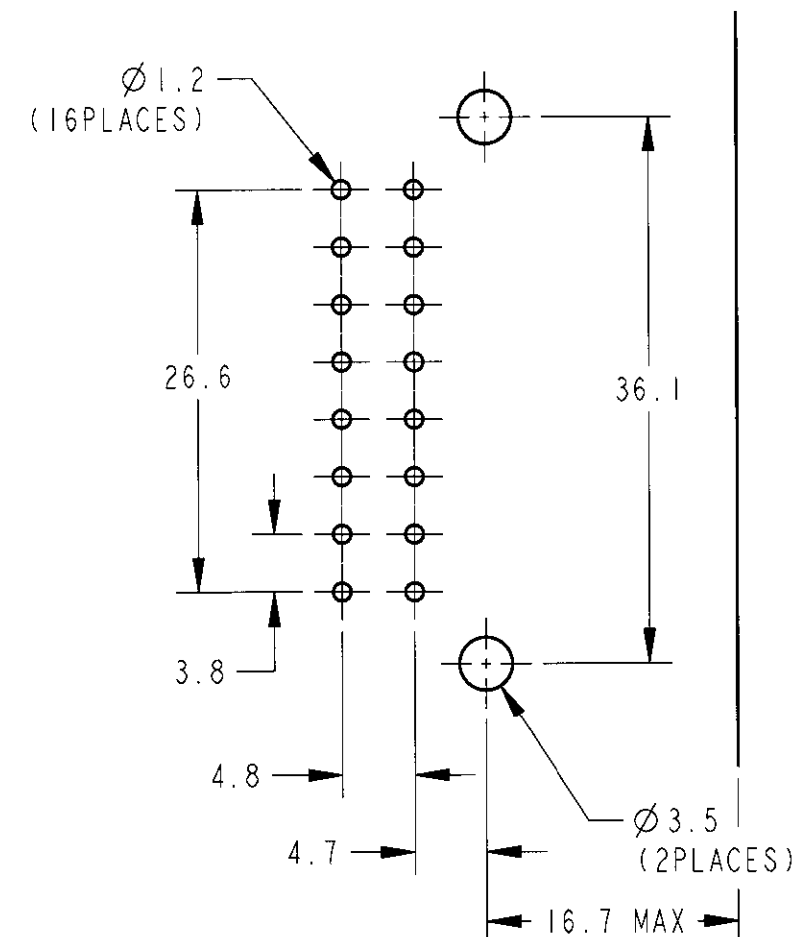

4.8±0.4

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: 単位: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 = ± 0.3
0-PLC	±
1-PLC	±0.5
2-PLC	±0.13
3-PLC	±0.013
4-PLC	±0.001
ANGLES	±0.00
MATERIAL 材料	PBT
FINISH 仕上	-

DWN	E. SASAKI	7FEB00
CHK	H. KITAMURA	7FEB00
APVD	M. TSUKAKOSHI	7FEB00
PRODUCT SPEC	108-5452	
APPLICATION SPEC		
WEIGHT	9.3 g	

CUSTOMER DRAWING

AMPTyco Electronics AMP K.K.
Kawasaki, JapanCAP HOUSING ASSEMBLY 16POS. H-TYPE
, 07011 MULTI-LOCK CONNECTOR
キャップハウジングアセンブリ 16極 水平型, 07011 マルチロックコネクタ

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C=1376019	-

SCALE 2:1 SHEET 1 OF 1 REV 0

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1376019-1](#)