


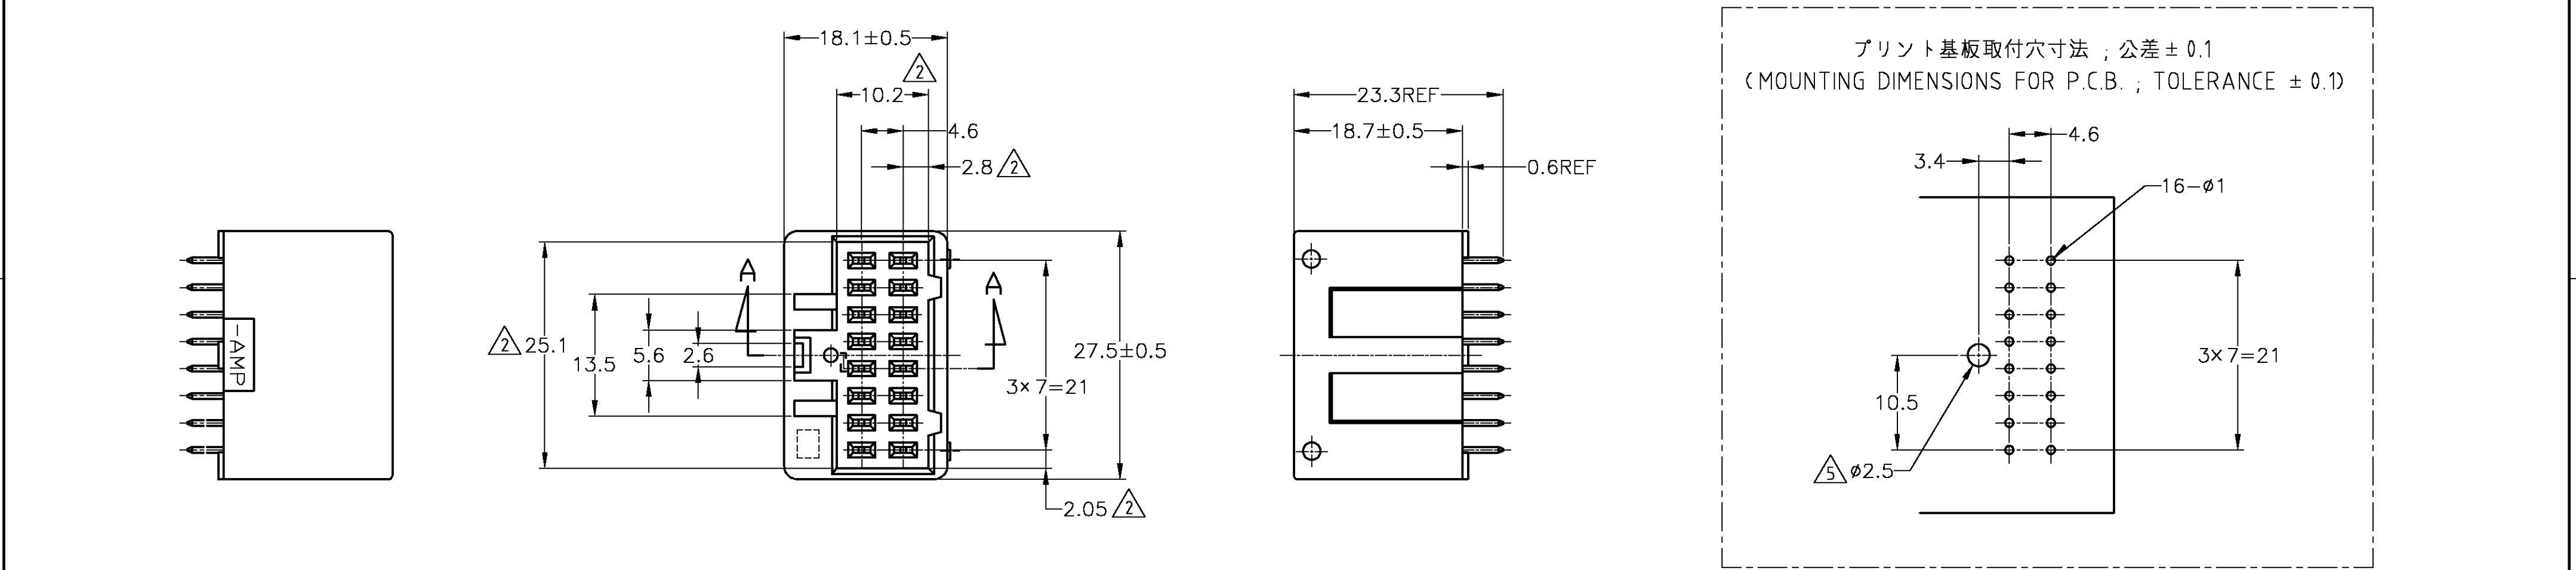

1. プリント基板にポストの変形なく挿入可能なこと。

2. 面より2mmの範囲で測定

3. 適合する相手ハウジング型番 172021,172852

4. 適用製品規格 ; 108-5124

5. 推奨取付ねじ ; JIS B1115,B1122

タッピンねじ なべ3種又は4種 呼び径2の長さ5。
1. MUST BE INSERTED TO P.C.B. WITHOUT POST DEFORMATION.

2. MUST BE KEPT BETWEEN -T- AND 2.


3. MATING PLUG HOUSING ; 172021,172852

4. PRODUCT SPECIFICATION ; 108-5124

5. RECOMMENDED MOUNTING SCREW ; JIS B1115 OR B1122

PAN HEAD TAPPING SCREW, CLASS 3 OR 4, DIAMETER 2, LENGTH 5.

SELECTIVE-TIN		PRE-TIN	BLACK	172258-2
SELECTIVE-TIN (MATTE)		SELECTIVE-TIN (BRIGHT)	BLACK	172258-1
SOLDERING SIDE 半田付け部		CONTACT SIDE 接触部側	COLOR 色	PART NUMBER 製品型番
CONTACT FINISH コンタクト仕上				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.SHINOHARA 10FEB06	tyco Tyco Electronics AMP K.K. Electronics Kawasaki, Japan			
DIMENSIONS: 単位 : 特 mm		CHK K.BETSUI 10FEB06	NAME K.BETSUI			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD K.BETSUI 10FEB06	PRODUCT SPEC 製品規格			
		SEE NOTE 4		16POSITION CAP HOUSING ASSEMBLY (VERTICAL TYPE) DUAL LINE INTERLOCK CONNECTOR		
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ±		APPLICATION SPEC 取付適用規格				
FINISH 仕上		WEIGHT —				
MATERIAL 材料		SIZE A2				
HOUSING : 66NYLON		CAGE CODE 00779		DRAWING NO 番号 172258	RESTRICTED TO —	
POST : COPPER ALLOY		CUSTOMER DRAWING		SCALE 尺度 2:1	SHEET 1 OF 1	REV C1

一般公差 (GENERAL TOLERANCE)	
10以下 :	±0.2
10を超え 30以下 :	±0.25
30を超え 100以下 :	±0.3
角 度 :	±3°

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[172258-1](#)