

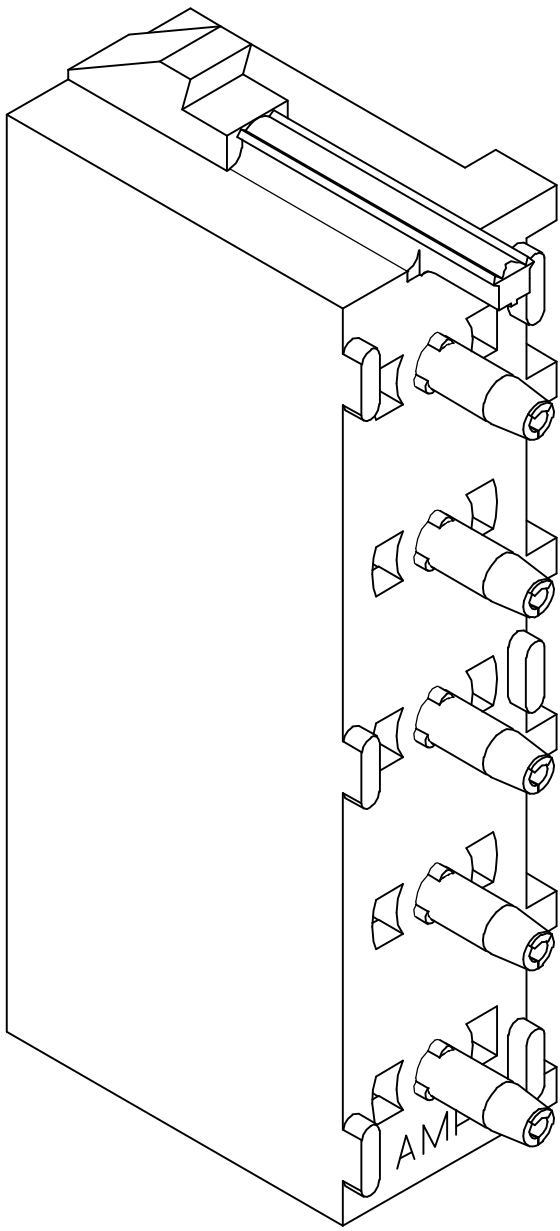
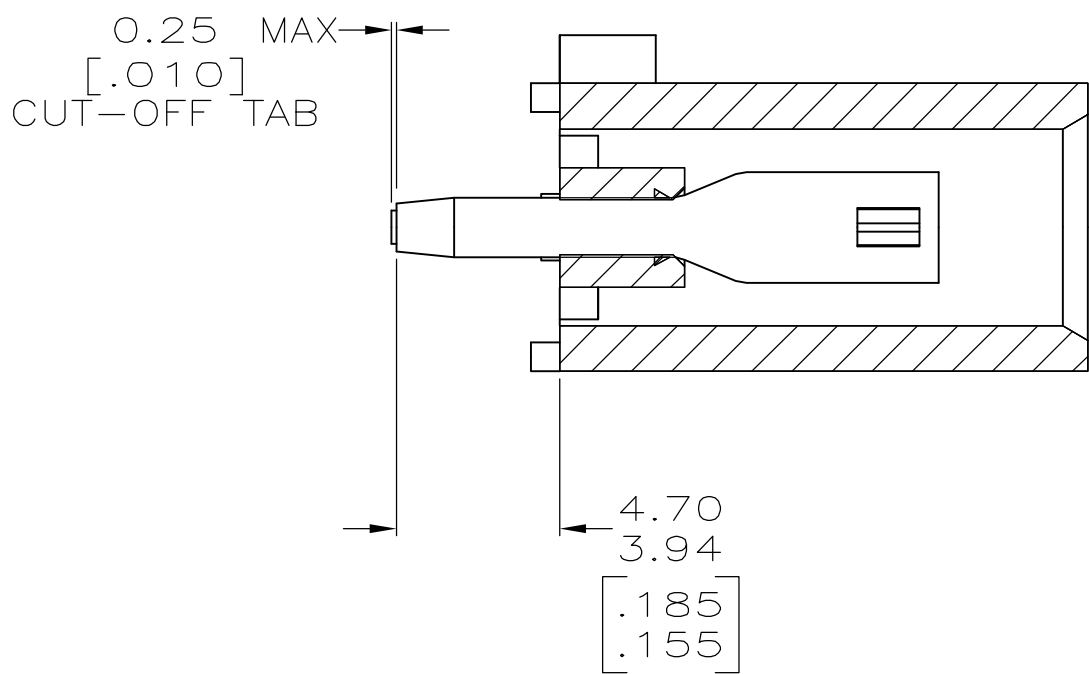


1. PARTS COMPLY TO AMP SOLDERABILITY SPECIFICATION 109-11-3.
2. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
3. DIMENSIONS IN BRACKETS ARE IN INCHES.

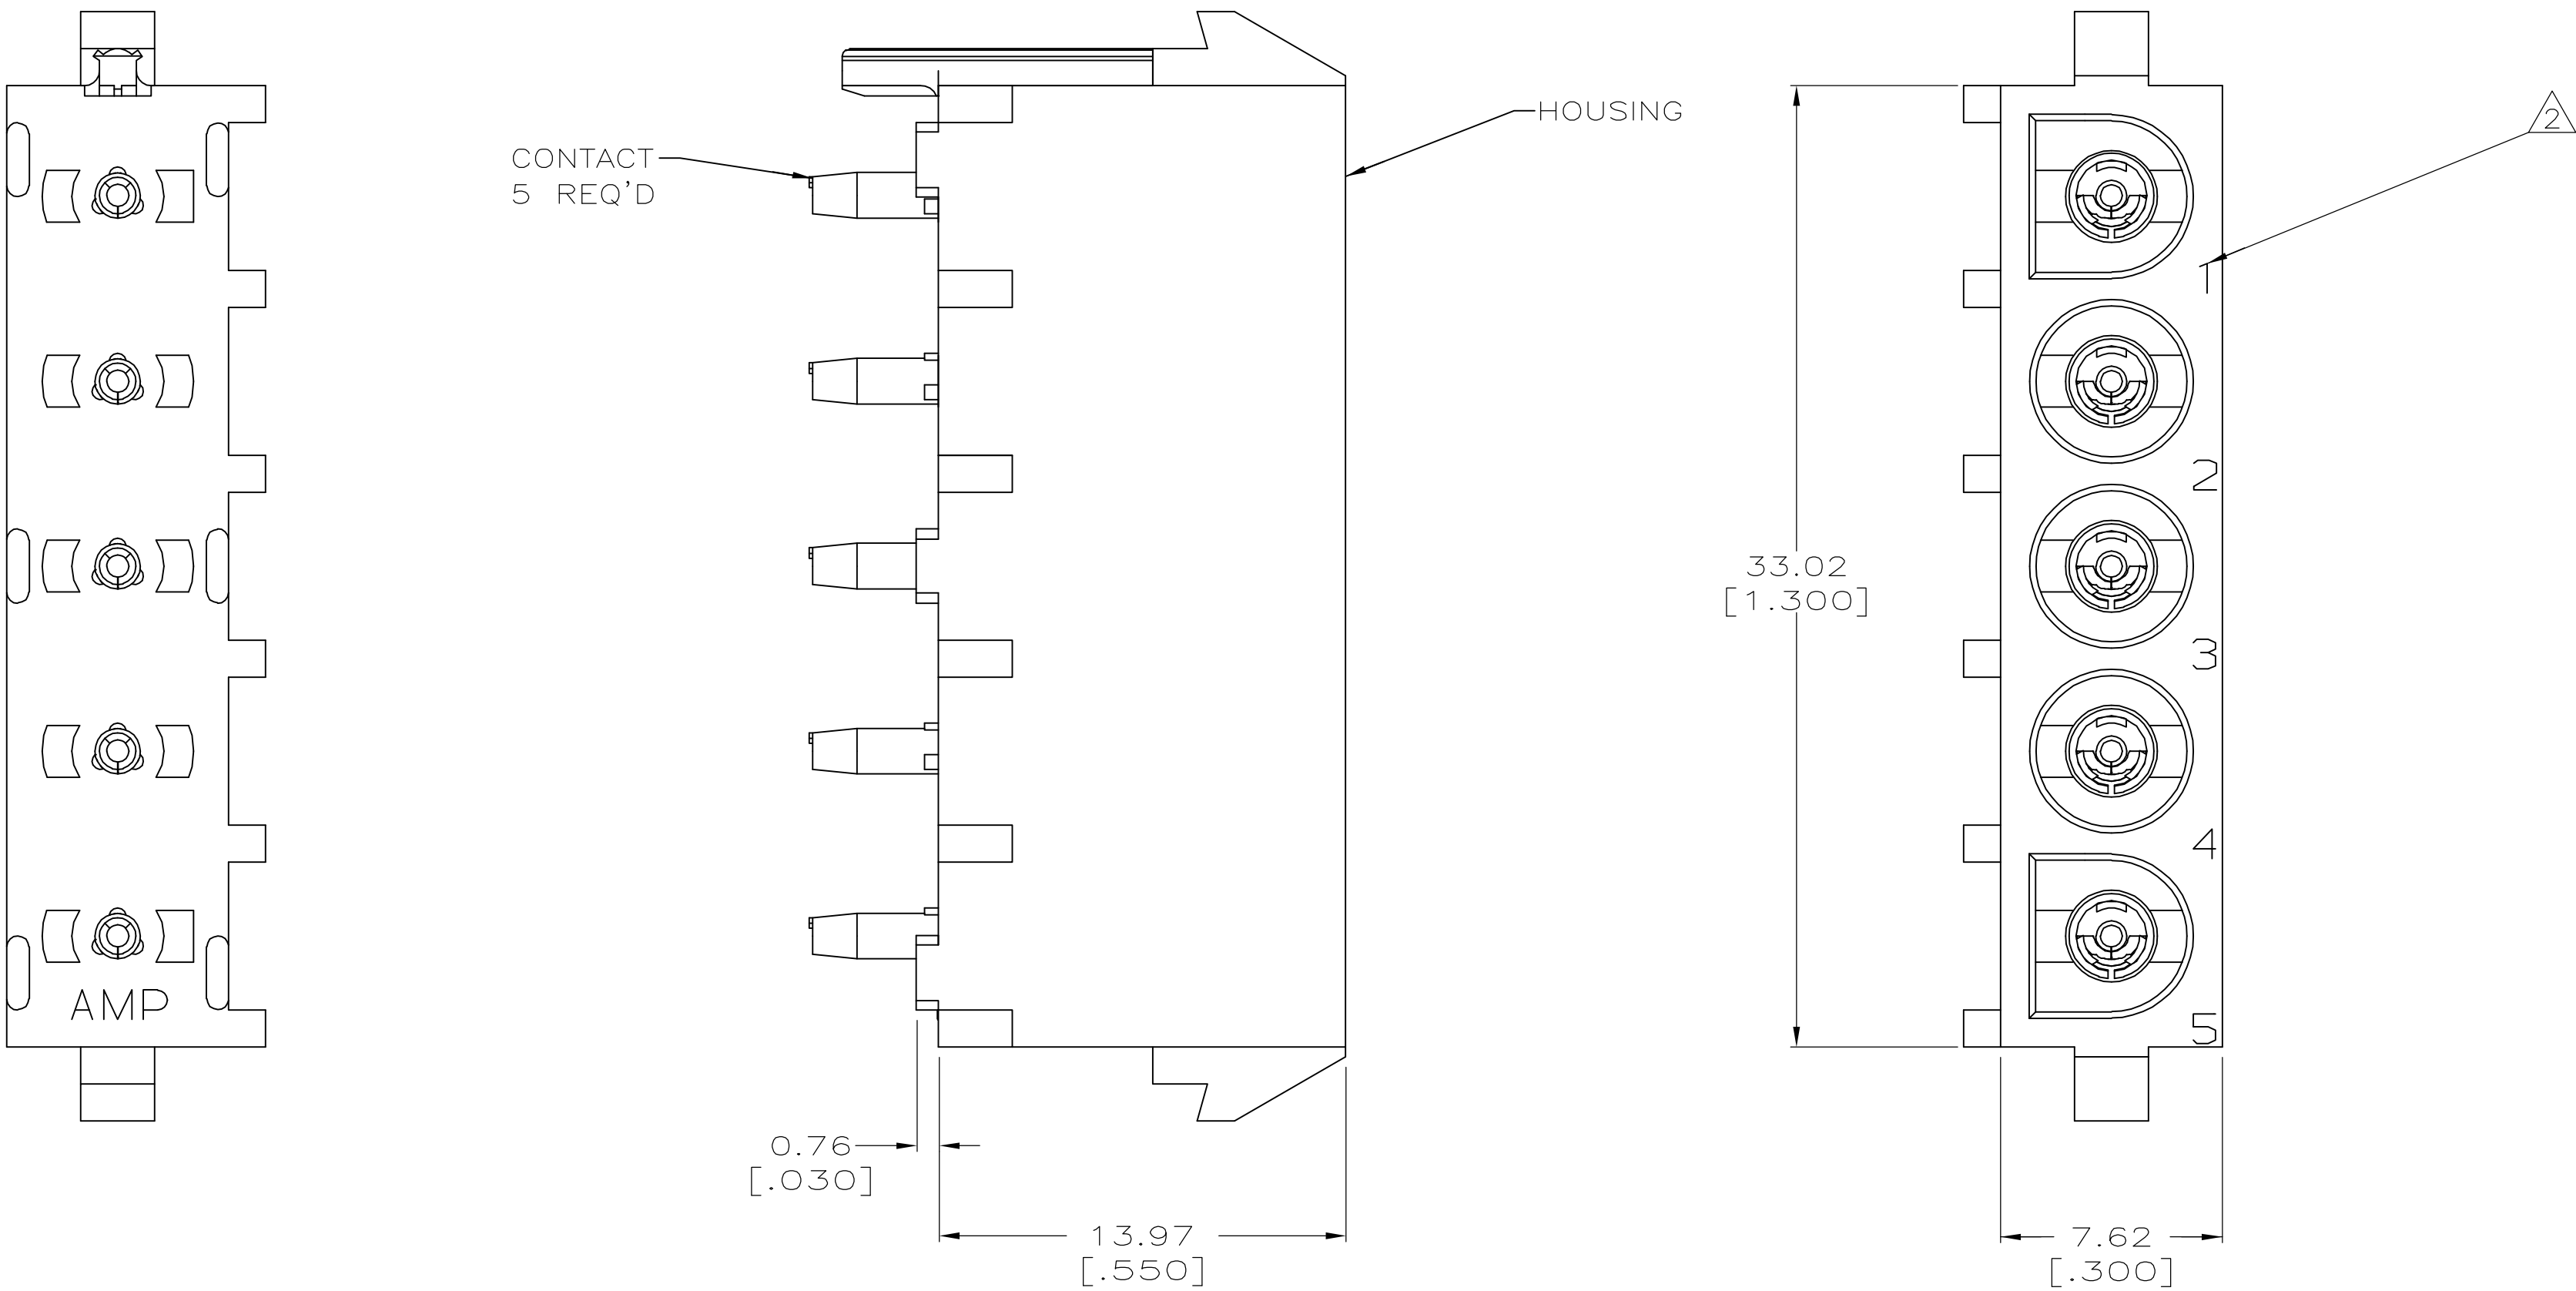


3-DIMENSIONAL MODEL
NTS

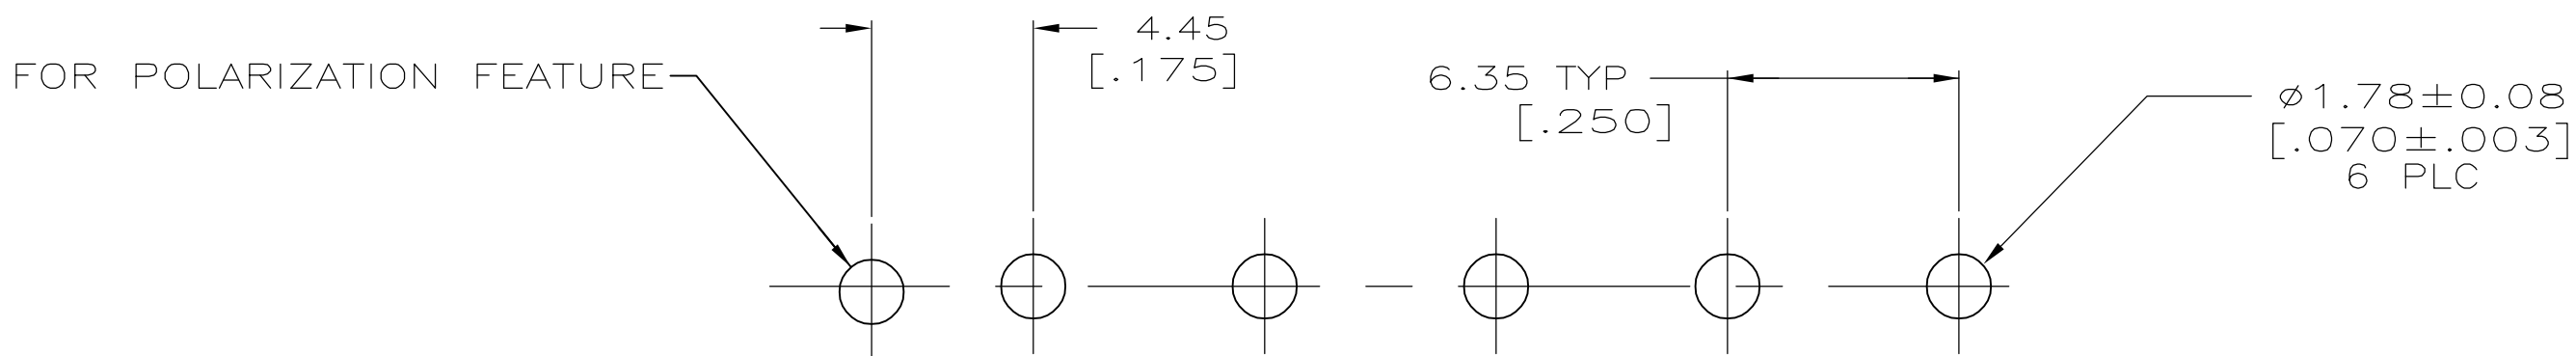

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 [.062] THICK P.C. BOARD

PHOSPHOR BRONZE, PRE-TIN	NYLON,UL94-V-2,BLACK	794584-2
PHOSPHOR BRONZE, PRE-TIN	NYLON,UL94-V-2,NATURAL	794584-1
PIN CONTACT MATERIAL AND FINISH	HOUSING MATERIAL	PART NUMBER

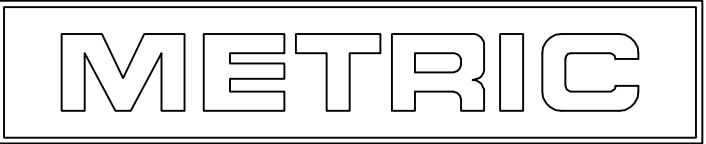

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 05AUG2005	tyco <i>Electronics</i> Tyco Electronics Corporation Harrisburg, Pa 17105-3608									
		CHK S. RIDGILL 05AUG2005										
		APVD S. RIDGILL 05AUG2005										
		PRODUCT SPEC										
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME	SOCKET HEADER ASSEMBLY, POLARIZED,5 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)									
	0 PLC ± -	APPLICATION SPEC										
	1 PLC ± -	—										
	2 PLC ± 0.13 [.005]	—										
MATERIAL SEE TABLE	3 PLC ± -	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO						
	4 PLC ± -	—	A1	00779	C=794584	—						
	ANGLES FINISH	± 0°30'	CUSTOMER DRAWING									
		WEIGHT	—		SCALE	5:1	SHEET	1	OF	1	REV	0

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[794584-1](#)