


SECTION A-A
SCALE 10:1

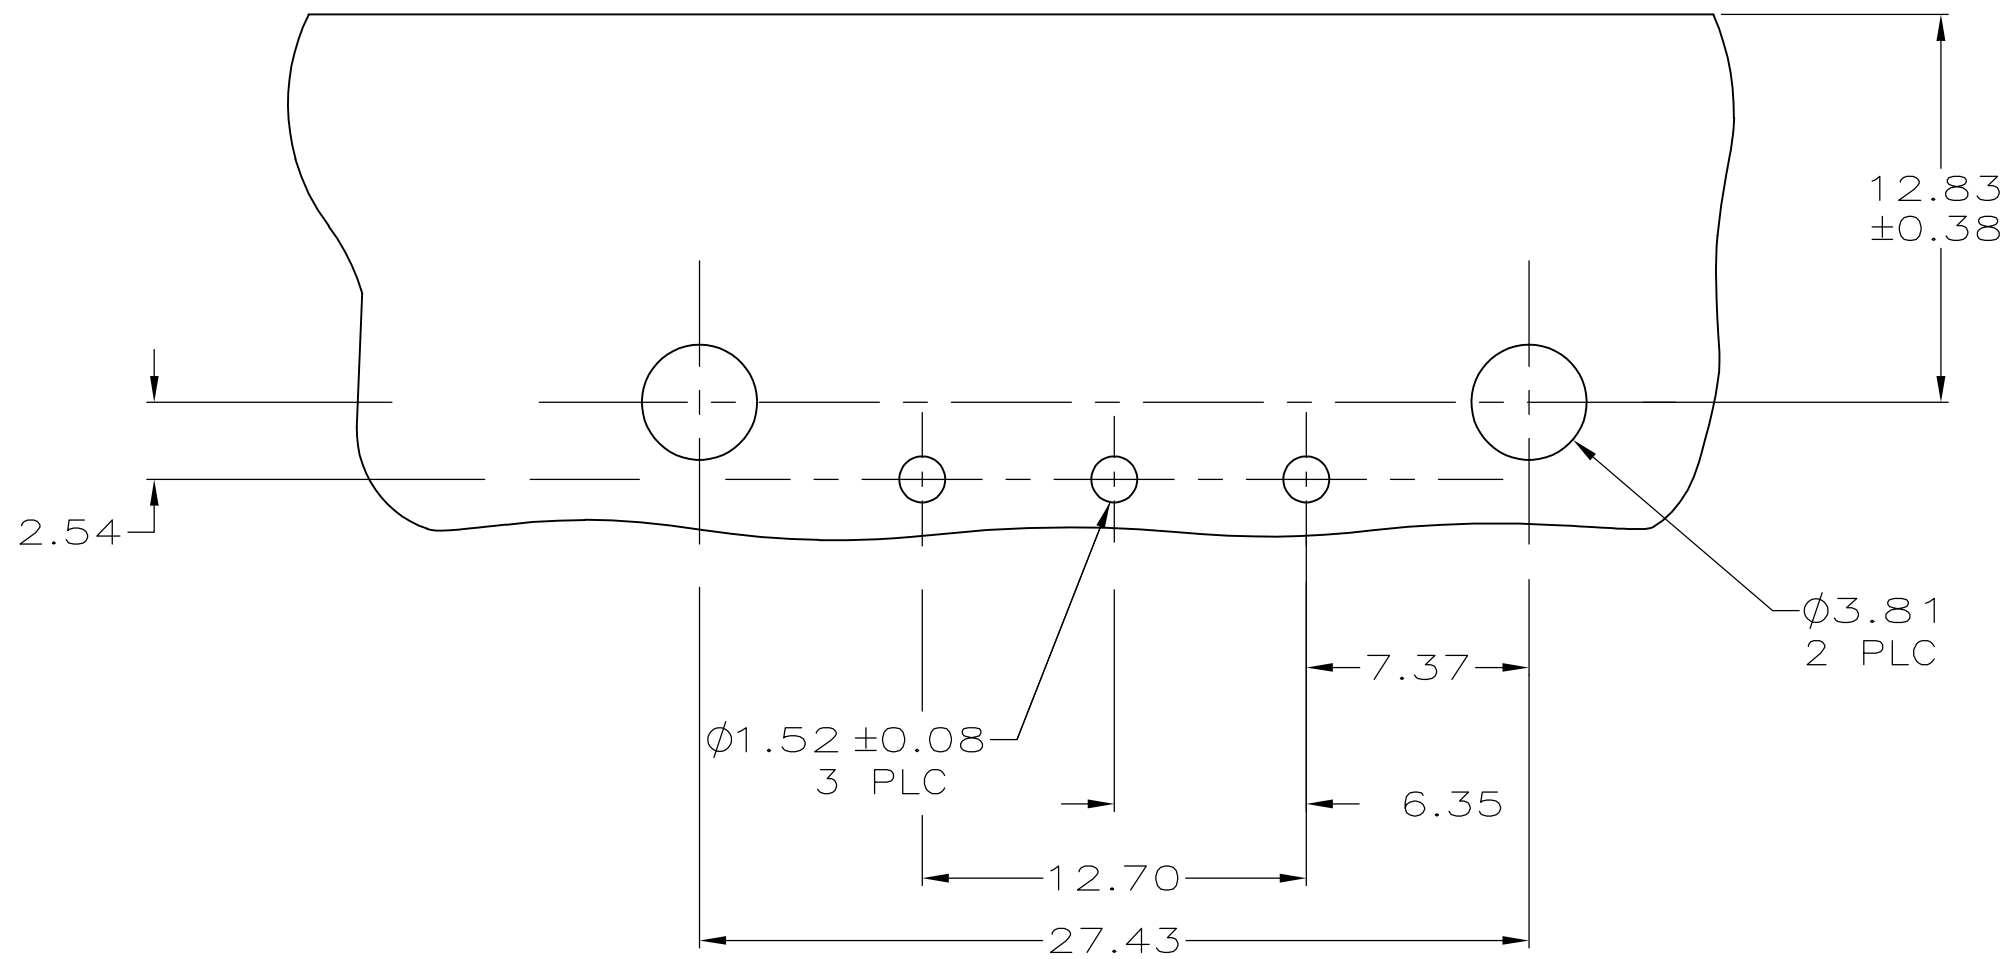

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK P.C. BOARD

2.54	.100		
2.03	.080	37.97	1.495
1.91	.075	27.43	1.080
1.57	.062	20.32	.800
1.52	.060	17.27	.680
1.27	.050	12.83	.505
0.38	.015	12.70	.500
0.25	.010	9.14	.360
0.13	.005	7.37	.290
0.08	.003	6.35	.250
0.00127	.000050	4.06	.160
0.00076	.000030	3.81	.150
MM	IN	MM	IN

CONVERSION TABLE

1 PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-5.

3 0.00076 GOLD OVER 0.00127 MIN NICKEL WITH MATTE TIN LEAD ON SOLDER TAIL.

4 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES,BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.

5 0.00076 GOLD OVER 0.00127 MIN NICKEL WITH MATTE TIN ON SOLDER TAIL.

6 SUPERSEDED BY 3-643228-0

PH BRZ,	5	NYLON UL 94V-0	3-643228-0
PH BRZ,	3	NYLON UL 94V-0	643228-2
PH BRZ,TIN		NYLON UL 94V-0	643228-1
CONTACT		HOUSING	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.	DWN K. WHITAKER CHK S. RIDGILL APVD S. RIDGILL	21APR2005 21APR2005 21APR2005	NAME
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC APPLICATION SPEC	SIZE CAGE CODE DRAWING NO
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT -	RESTRICTED TO
CUSTOMER DRAWING			SCALE 4:1 SHEET 1 OF 1 REV D2

TE Connectivity	
SOCKET HEADER ASSEMBLY, RIGHT ANGLE MOUNT,3 POSITION, UNIVERSAL MATE-N-LOK(TM)	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-643228-0](#)