
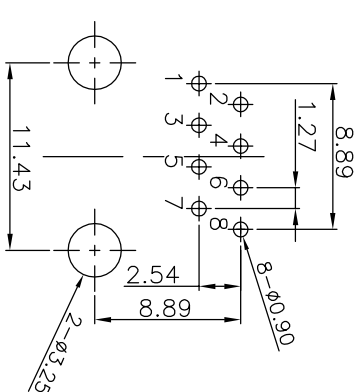
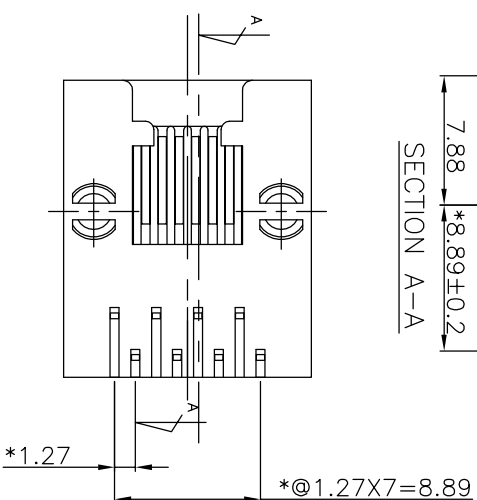
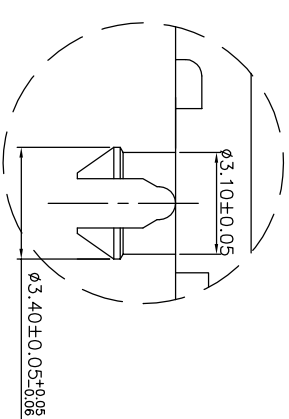
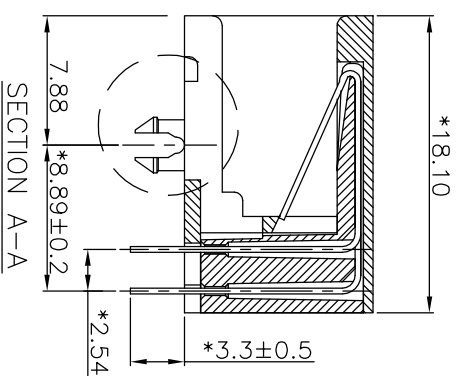


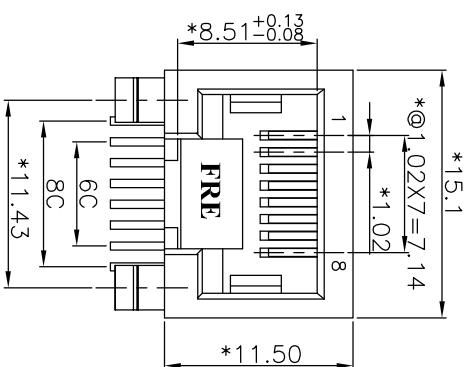

Thickness=1.60mm

PC BOARD LAYOUT COMPONENT SIDE SHOWN

1. STORAGE : -40°C TO +85°C.
2. OPERATION: -40°C TO +85°C.
3. WAVE SOLDERING TEMPERATURE: 230°~250°(3~5 SECONDS)
4. ROHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E163191

NOTES:

ELECTRICAL:

1. VOLTAGE RATING	: 125 VAC RMS.
2. CURRENT RATING	: 1.5 AMP.
3. CONTACT RESISTANCE	: 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE	: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH	: 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL	: GLASS FILLED POLYESTER UL94V-0.
2. CONTACT MATERIAL	: PHOSPHOR BRONZE t=0.35mm.
3. PLATING	: GOLD PLATING OVER NICKEL.
4. OPERATING LIFE	: 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER	: 1 LB MIN.
6. PCB RETENTION POST-SOLDER	: 10 LBS MIN.

ENVIRONMENTAL:

NOTES:
ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL

2. CONTACT MATERIAL : PHOSPHOR BRONZE $t=0.35\text{mm}$.

3. PLATING

4. OPERATING LIFE : 750 CYCLES MIN.

5. PCB RETENTION PRE-SOLDER : 1 LB MIN.

6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.

2. OPERATION: -40°C TO $+85^{\circ}\text{C}$.

3. WAVE SOLDERING TEMPERATURE: 230°~250°(3~5 SECONDS)

4. ROHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO

IM/VIDEO WITH MODERN LENS
FCC PART 68 SUBPART F

FILE NO. E163191

PART NUMBER	GOLD PLATING	CONTACTS
E5386-E00212-L	6u"	6
E5388-E00212-L	6u"	8
E5388-E00213-L	15u"	8
E5388-E00214-L	30u"	8

 THIRD ANGLE PROJECTION DETAILED LISTS	
MM INCH TOLEANCES EXCEPT AS NOTED	
MM .0 ± 0.2 .00 ± 0.15 .000 ± 0.075	± ± ±
ANGLES ± 0.5	
DTFO JEN CHI DATE 06/28/06 Pulse A TECHNICAL COMPANY	
RoHS Compliant	
DRAWING NO. CE533096-01	
TITLE 11.5 SIDE ENTRY 8P	
FCC DEEP TYPE	
DO NOT SCALE DRAWING	
/PART NO. SEE NOTES A3	SIZE REV O
SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[E5388-E00212-L](#)