


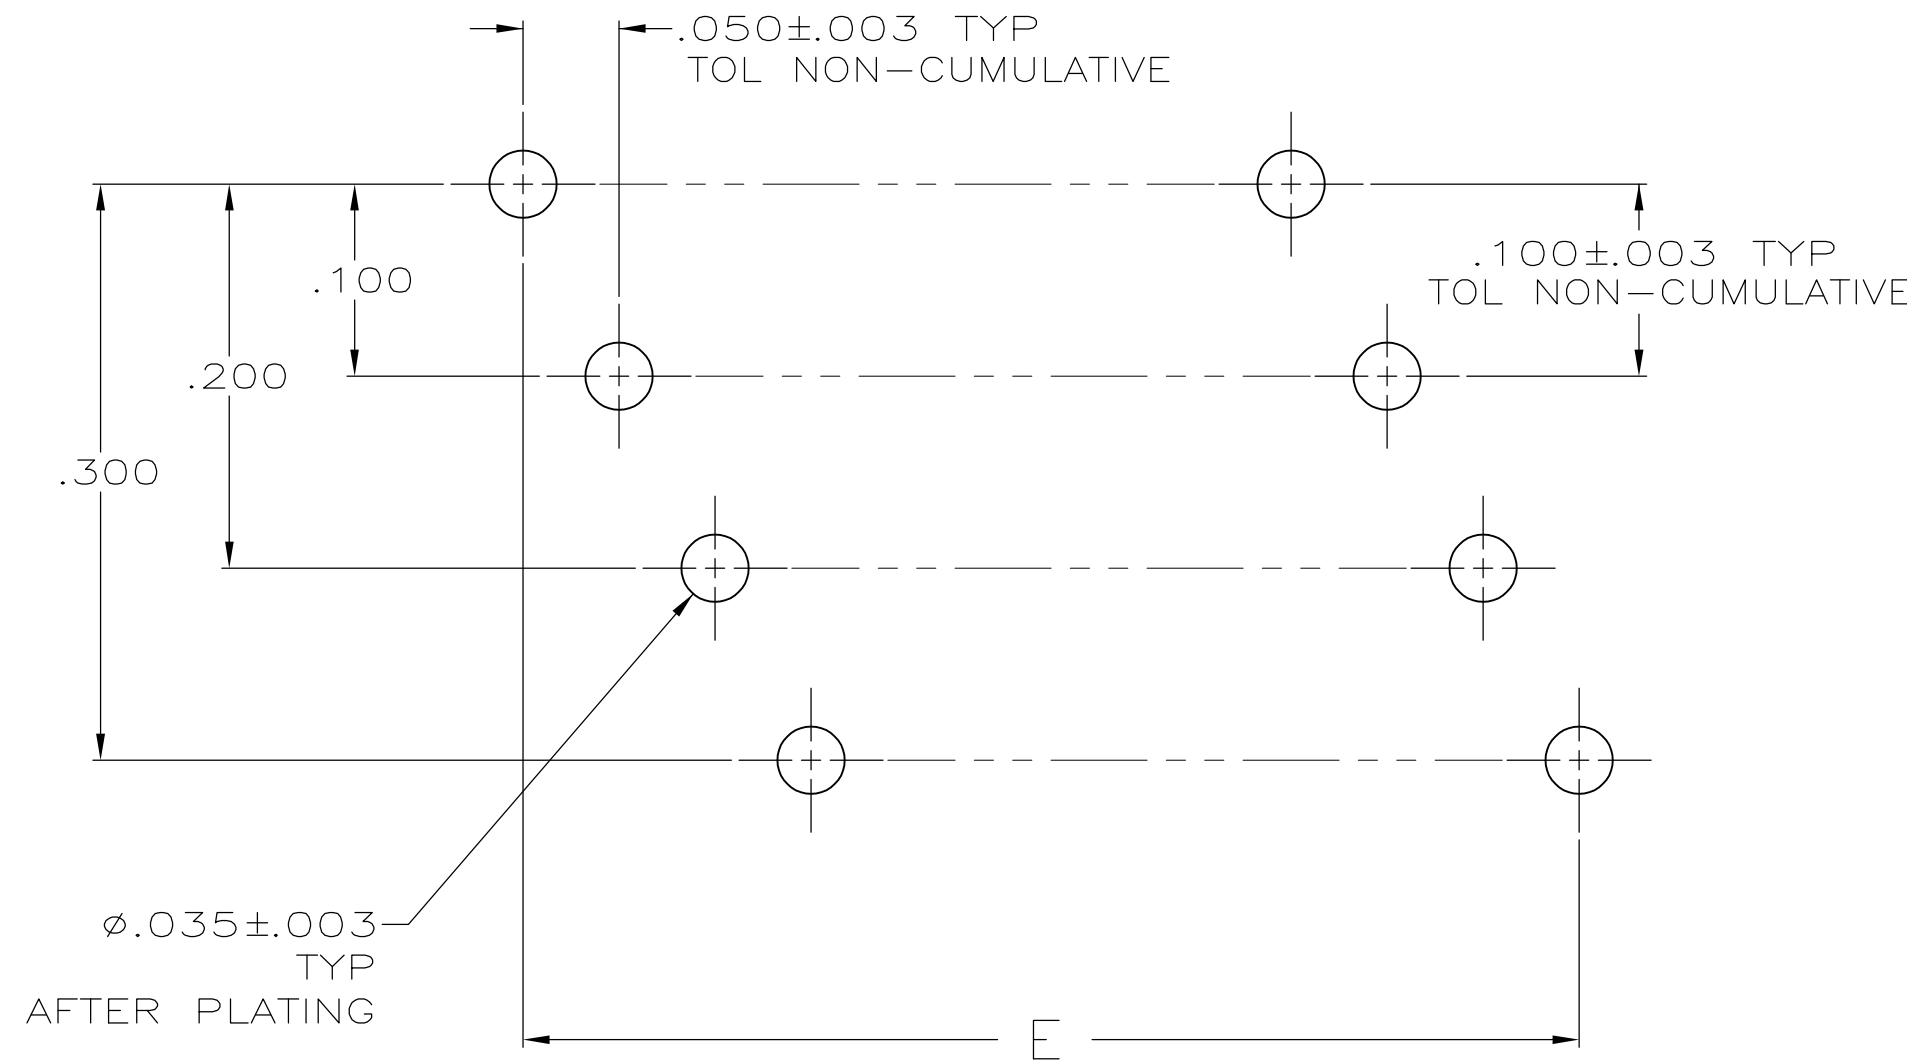

1 AMP TRADEMARK LOCATED IN APPROX AREA SHOWN.

2 STANDOFFS: POSN 12 (9) STANDOFFS AS SHOWN.
POSN 16 (12) STANDOFFS, 3 PER DIAGONAL ROW.
POSN 20 (15) STANDOFFS, 3 PER DIAGONAL ROW.
POSN 24 (18) STANDOFFS, 3 PER DIAGONAL ROW.
POSN 28 (21) STANDOFFS, 3 PER DIAGONAL ROW.
POSN 32 (24) STANDOFFS, 3 PER DIAGONAL ROW.
POSN 36 (27) STANDOFFS, 3 PER DIAGONAL ROW.
POSN 40 (30) STANDOFFS, 3 PER DIAGONAL ROW.
POSN 44 (33) STANDOFFS, 3 PER DIAGONAL ROW.
POSN 48 (36) STANDOFFS, 3 PER DIAGONAL ROW.
POSN 52 (39) STANDOFFS, 3 PER DIAGONAL ROW.
POSN 56 (42) STANDOFFS, 3 PER DIAGONAL ROW.
POSN 60 (45) STANDOFFS, 3 PER DIAGONAL ROW.



3 FINISH: BRIGHT TIN-LEAD .000100-.000200 THK OVER
NICKEL .000050 MIN THK.

4 HEIGHT AFTER TERMINATION IS .238 REF.

5 CAVITY IDENTIFICATION MOLDED IN THIS AREA.

6 FINISH: BRIGHT TIN .000100-.000200 THK OVER
NICKEL .000050 MIN THK.

RECOMMENDED HOLE LAYOUT

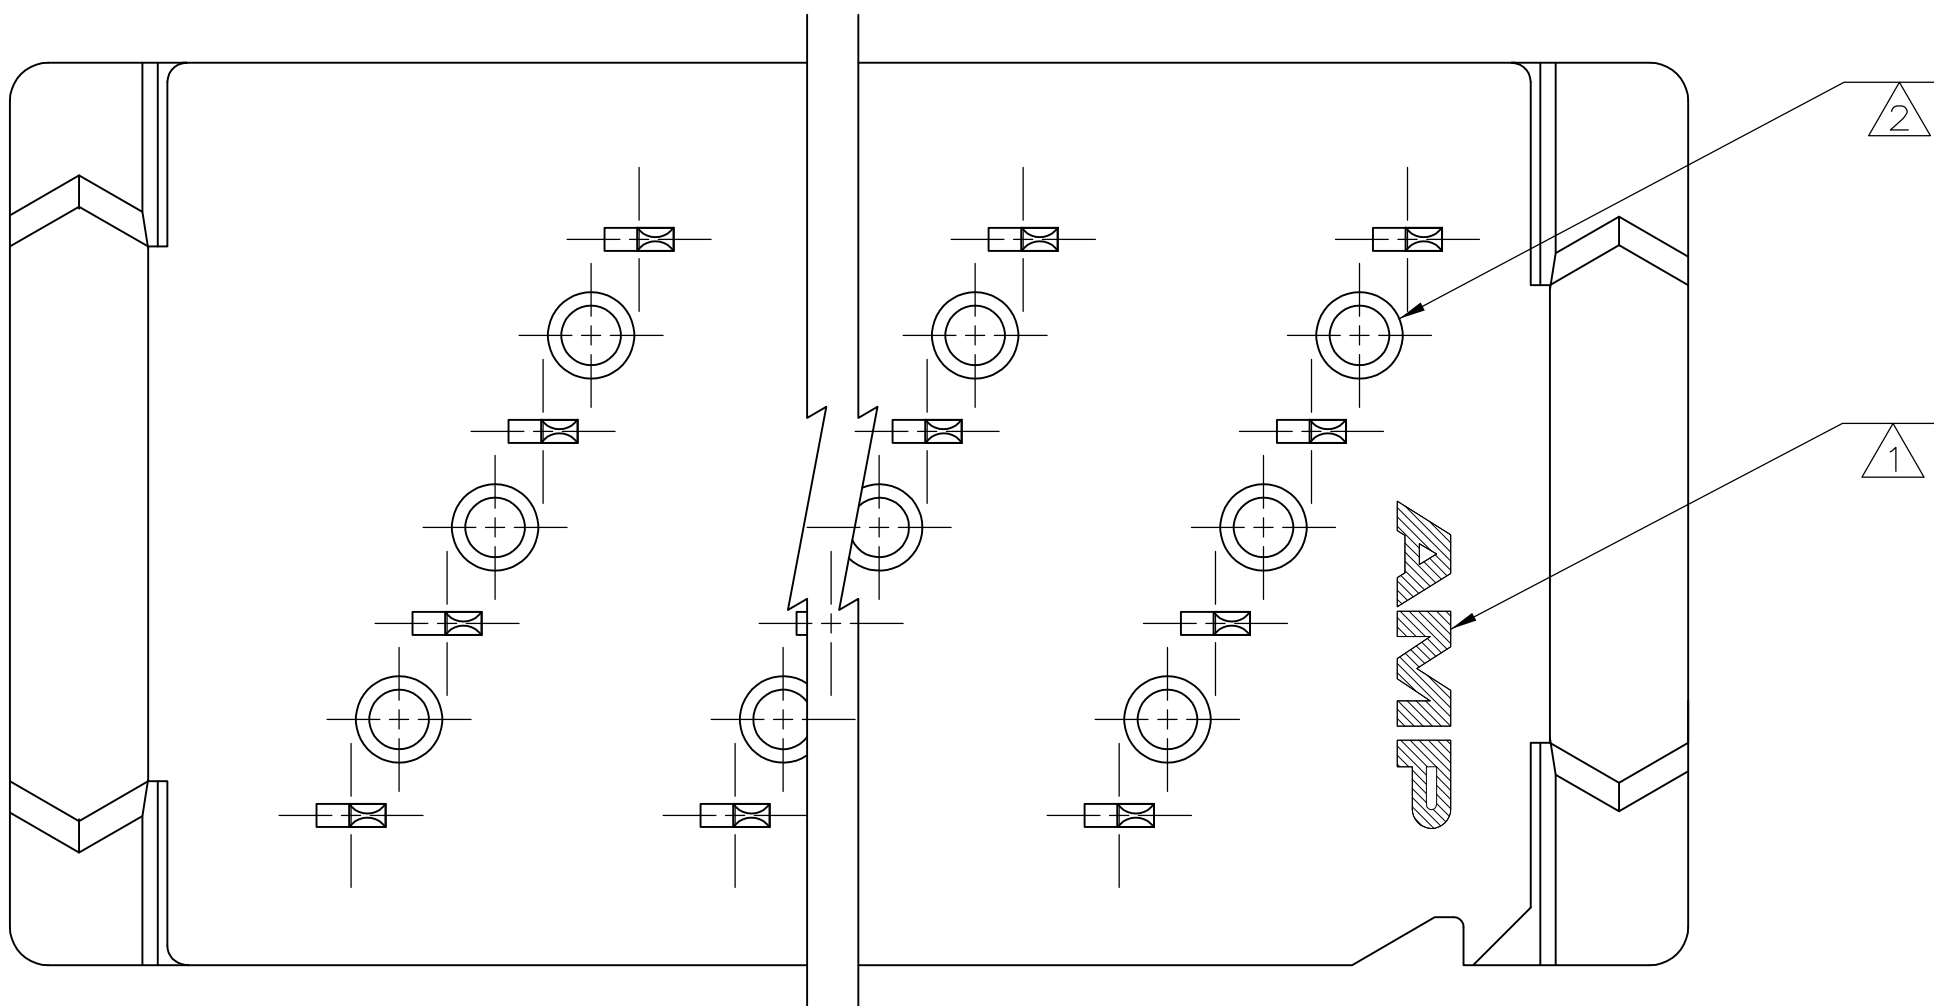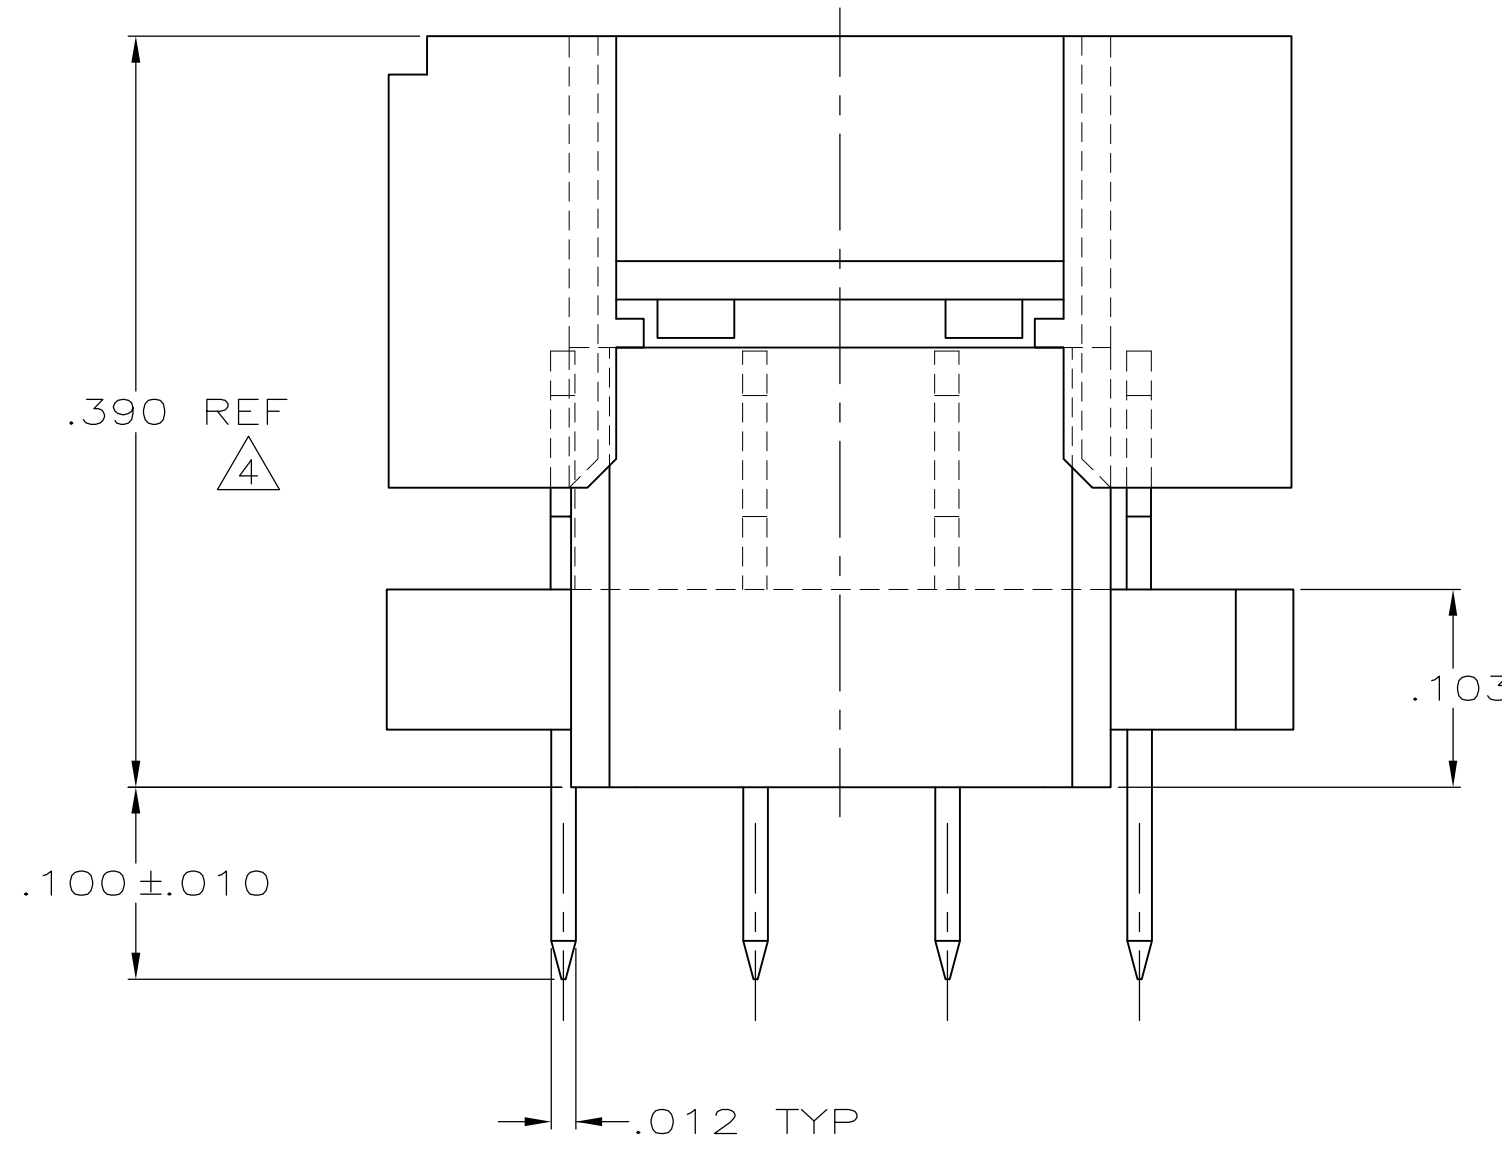

		2.950	2.950	3.274	2.950	2.950	59	60	6-111035-3
		2.150	2.150	2.474	2.150	2.150	43	44	5-111035-9
		1.950	1.950	2.274	1.950	1.950	39	40	5-111035-8
		1.750	1.750	2.074	1.750	1.750	35	36	5-111035-7
		1.550	1.550	1.874	1.550	1.550	31	32	5-111035-6
		1.150	1.150	1.474	1.150	1.150	23	24	5-111035-4
		.950	.950	1.274	.950	.950	19	20	5-111035-3
		.750	.750	1.074	.750	.750	15	16	5-111035-2
		2.950	2.950	3.274	2.950	2.950	59	60	1-111035-3
OBSOLETE		2.750	2.750	3.074	2.750	2.750	55	56	1-111035-2
OBSOLETE		2.550	2.550	2.874	2.550	2.550	51	52	1-111035-1
OBSOLETE		2.350	2.350	2.674	2.350	2.350	47	48	1-111035-0
		2.150	2.150	2.474	2.150	2.150	43	44	111035-9
		1.950	1.950	2.274	1.950	1.950	39	40	111035-8
		1.750	1.750	2.074	1.750	1.750	35	36	111035-7
		1.550	1.550	1.874	1.550	1.550	31	32	111035-6
OBSOLETE		1.350	1.350	1.674	1.350	1.350	27	28	111035-5
		1.150	1.150	1.474	1.150	1.150	23	24	111035-4
		.950	.950	1.274	.950	.950	19	20	111035-3
		.750	.750	1.074	.750	.750	15	16	111035-2
OBSOLETE		.550	.550	.874	.550	.550	11	12	111035-1
	FINISH	F	E	D	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 05-MAR-86 J. PEACHEY OK'D 23-MAY-86 M. SCULLY APPROV'D 23-MAY-86		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± 1. PLC ± 2. PLC ± 3. PLC ±.005 4. PLC ± ANGLES ± FINISH		NAME KIT, AMP-LATCH PADDLEBOARD PREASSEMBLED, .100 LONG POSTS FULL ROW, FULL TIN PLATED CONTACTS	
		APPLICATION SPEC 114-40005		SIZE CAGE CODE DRAWING NO A1 00779 C-111035	
MATERIAL MOLDED PARTS: 94V-0 RATED THERMOPLASTIC, COLOR: BLACK CONTACTS: PH: BZ PER QQ-B-750		WEIGHT —		RESTRICTED TO —	
CONTACTS 		CUSTOMER DRAWING		SCALE 10:1 SHEET 1 OF 1 REV. 0	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-111035-2](#)