


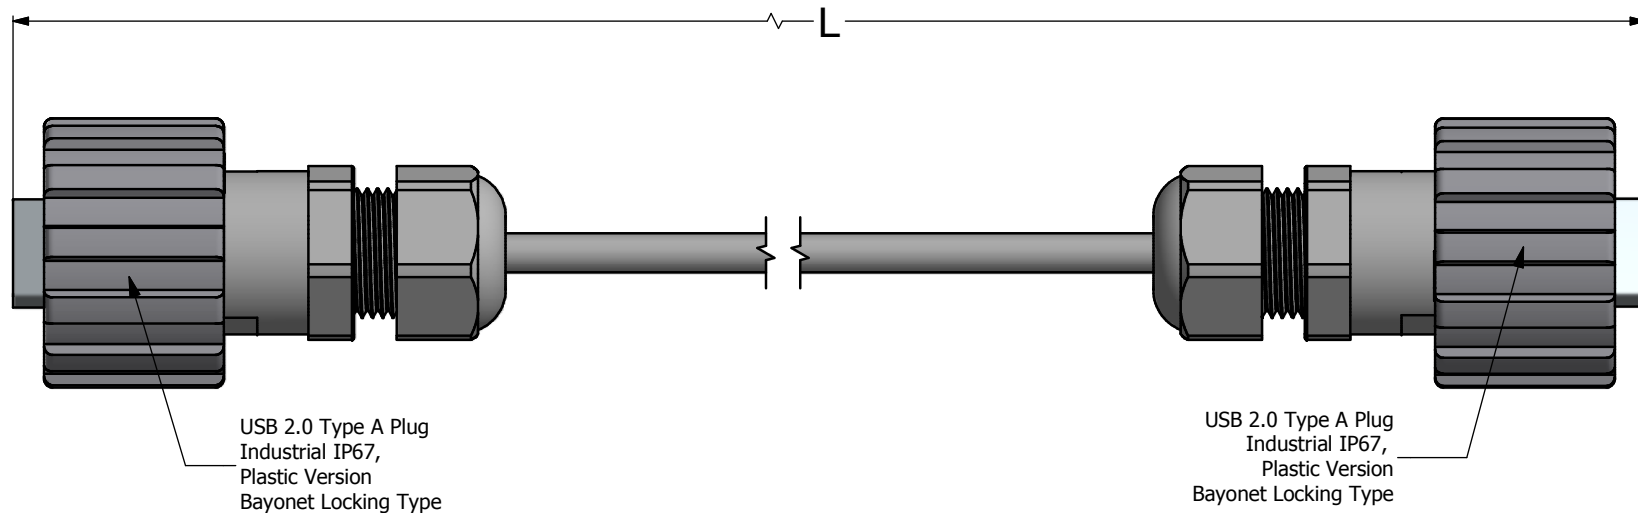

NOTES:

1. Electrical Specifications:

- Meets USB 2.0 specifications
- Low level Contact Resistance: 30 mOhm max.
- Insulation Resistance 1000 MOhm min.
- Current Rating: 1.5 A max. @ 25°C
- DWV: 500 VAC/60s at sea level
- Operating Temperature: -40°C to +80°C

2. Material and Finish:

- Coupling Ring: Polyester (Black); UL94 V-0
- Plug Housing: Polyester (Black); UL94 V-0
- Interfacial Seal: Silicone, Color: White
- Cable Gland: PA (Black); UL94 V-0
- Cable Gland Seal: NBR, Color: Black
- USB Insulator: PBT, UL 94V-0, Color: White
- USB Metal Shell: SPCC. Nickel plated
- USB Contact: Copper Alloy, 30 u" min. Au over 40 u" min. Nickel Plated

3. Shielded USB Cable Configuration

AWM 2725 AWG28/1p + AWG24/2c, OD: 4.5 mm Color: black

Directive 2002/95/EC RoHS Compliant

②	Cable Length L	Part Number
③	0.46 m +/- 0.01m	17-230361
④	1 m +/- 0.03m	17-200271
	2 m +/- 0.05m	17-200281
	3 m +/- 0.05m	17-200291
	4 m +/-0.08m	17-200301
	4.5 m +/-0.08m	17-200311

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY MANNER AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION.				Customer:				Tolerance Unless otherwise specified			Scale: 1.7:1		Dim. in			
				Name		Title		Approval Date			0 0.30 1 0.20 2 0.10 3 0.05 ANGLES ± 1°		Material: See Notes		Title: USB Patch Cord USB 2.0 Type A Plug (Industrial) to USB 2.0 Type A Plug (Industrial)	
				2008		Date		Name			Draw. Sept. 23 Vincent Ke					
				Appd. Sept. 23 J. chaudry		Norm		D-old			Drawing No.: 17K1A107					
d 1 x d		Feb/26/2014		Vincent Ke		D-old		CONEC®		Part No.: SEE P/N ABOVE		DIN A3				
c 1 x c		May/08/2013		Vincent Ke								Sheet 1/1				
b 1 x b		Jan/19/2009		Vincent ke												
a original																
Rev.		Changes		Date		Name										

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CONEC:](#)

[17-200281](#) [17-200291](#) [17-200311](#)