


LOC	DIST	REVISIONS				
CE	16	P	LTR	DESCRIPTION	DATE	DWN
			A	RELEASE PER NPR	25 OCT 05	CSV
						APVD
						JD

- 1
- MAXIMUM CONNECTOR INSERTION LOSS IS 0.5 dB PLUS CABLE
ATTENUATION OF 1.5dB/km AT 1300nm (SEE TABLE)
- 2
- GEOMETRY REQUIREMENTS:
RADIUS OF CURVATURE : 10–30 mm
3.
- PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF
TYCO ELECTRONICS STANDARD 230–702

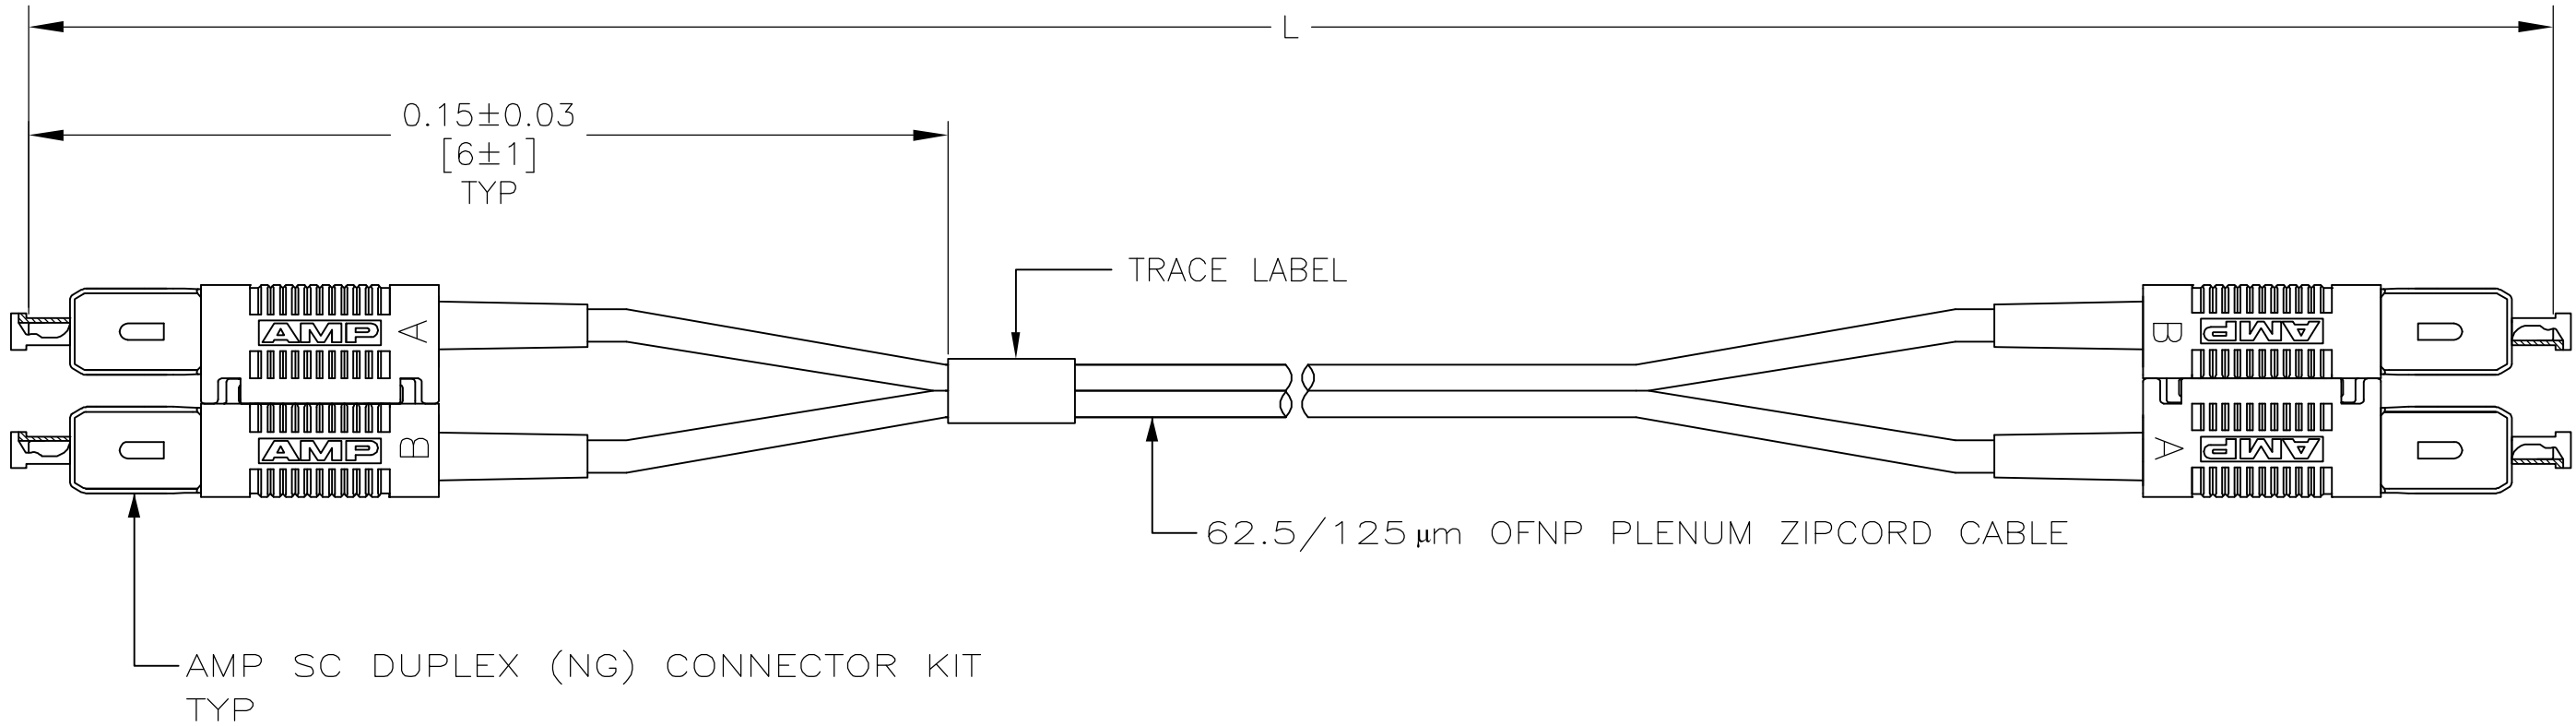

0.65	100.00±1.00 [3937.0±39.0]	9–6374039–9
0.57	50.00±0.50 [1969.0±20.0]	5–6374039–0
0.54	30.00±0.30 [1181.0±12.0]	3–6374039–0
0.53	20.00±0.30 [590.6±12.0]	2–6374039–0
0.52	14.00±0.15 [551.2±6.0]	1–674039–6
0.52	15.00±0.15 [590.6±6.0]	1–6374039–5
0.51	12.00±0.15 [472.4±6.0]	1–6374039–4
0.51	11.00±0.15 [433.1±6.0]	1–6374039–3
0.51	7.00±0.08 [275.6±3.0]	1–6374039–2
0.52	16.45±0.30 [648.0±12.0]	1–6374039–1
0.51	10.00±0.15 [394.0±6.0]	1–6374039–0
0.52	13.41±0.15 [528.0±6.0]	6374039–9
0.51	12.19±0.15 [480.0±6.0]	6374039–8
0.51	9.75±0.15 [384.0±6.0]	6374039–7
0.50	4.57±0.08 [180.0±3.0]	6374039–6
0.51	5.00±0.08 [197.0±3.0]	6374039–5
0.50	3.00±0.05 [118.0±2.0]	6374039–3
0.50	2.00±0.05 [79.0±2.0]	6374039–2
0.50	1.00±0.05 [39.0±2.0]	6374039–1

1	MAX IL (dB)	L	PART NUMBER
---	-------------	---	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	25 OCT 05	tyco Electronics Tyco Electronics Corporation Harrisburg, Pa 17105–3608	
		CHK	25 OCT 05		
		APVD	25 OCT 05		
		PRODUCT SPEC			
DIMENSIONS: METERS [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
	0 PLC	±	–	CABLE ASSEMBLY, FIBER OPTIC, 62.5/125µm PLENUM ZIP, AMP SC DUPLEX FIBER CHANNEL, OPTIMATE	
	1 PLC	±	–		
	2 PLC	±	–		
	3 PLC	±	–		
	4 PLC	±	–		
	ANGLES	±	–	–	
MATERIAL		FINISH		SIZE	RESTRICTED TO
–		–		A2	–
		WEIGHT		CAGE CODE	
		–		00779	
		CUSTOMER DRAWING		DRAWING NO	
				C=6374039	
				SCALE	
				NTS	
				SHEET	
				1 OF 1	
				REV	
				A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-6374039-6](#)