





**DIP6-pin type
featuring high sensitivity**

**PhotoMOS®
HS 1 Form A
(AQV234)**



(Height includes standoff)

mm inch



RoHS compliant

FEATURES

- High sensitivity**
LED operate current: Typ. 0.31mA
Recommended LED input current: 2mA
- Low-level off state leakage current of max. 1 μ A**
- Controls low-level analog signals**
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

TYPICAL APPLICATIONS

- High-speed inspection machines**
Scanner, IC checker, Board tester, etc.
- Telephone and data communication equipment**
- Battery operating equipment**

TYPES

	Output rating*		Package	Part No.				Packing quantity	
				Through hole terminal	Surface-mount terminal		Tube	Tape and reel	
	Load voltage	Load current			Tube packing style	Tape and reel packing style			
					Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side			
AC/DC dual use	400 V	120 mA	DIP6-pin	AQV234	AQV234A	AQV234AX	AQV234AZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs.

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	Type of connection	AQV234(A)	Remarks
Input	LED forward current	I_F		50 mA	
	LED reverse voltage	V_R		5 V	
	Peak forward current	I_{FP}		1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P_{in}		75 mW	
	Load voltage (Peak AC)	V_L		400 V	
Output	Continuous load current	I_L	A	0.12 A	A connection: Peak AC, DC B, C connection: DC
			B	0.13 A	
			C	0.15 A	
	Peak load current	I_{peak}		0.3 A	A connection: 100 ms (1 shot), $V_L = DC$
	Power dissipation	P_{out}		500 mW	
Total power dissipation		P_T		550 mW	
I/O isolation voltage		V_{iso}		1,500 Vrms	
Ambient temperature	Operating	T_{opr}		-40 to +85°C -40 to +185°F	(Non-icing at low temperatures)
	Storage	T_{stg}		-40 to +100°C -40 to +212°F	

HS 1 Form A (AQV234)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV234(A)	Condition	
Input	LED operate current	Typical	I _{Fon}	—	0.31 mA	ΔI _F /Δt ≥ 100 μA/s I _L = Max.
		Maximum				
	LED turn off current	Minimum	I _{Foff}	—	0.1 mA	ΔI _F /Δt ≥ 100 μA/s I _L = Max.
Typical		0.29 mA				
LED dropout voltage	Typical	V _F	—	1.25 V (1.1 V at I _F = 2 mA)		
	Maximum			1.5 V	I _F = 50 mA	
Output	On resistance	Typical	R _{on}	A	30 Ω	I _F = 2 mA, I _L = Max. Within 1 s
		Maximum			50 Ω	
		Typical	R _{on}	B	22.5 Ω	I _F = 2 mA, I _L = Max. Within 1 s
		Maximum			25 Ω	
	Typical	R _{on}	C	11.3 Ω	I _F = 2 mA, I _L = Max. Within 1 s	
	Maximum			12.5 Ω		
Off state leakage current	Maximum	I _{Leak}	—	1 μA	I _F = 0 mA, V _L = Max.	
Transistor characteristics	Turn on time*	Typical	T _{on}	—	0.89 ms	I _F = 2 mA I _L = Max.
		Maximum			2 ms	
	Turn off time*	Typical	T _{off}	—	0.22 ms	I _F = 2 mA I _L = Max.
		Maximum			1 ms	
	I/O capacitance	Typical	C _{iso}	—	0.8 pF	f = 1 MHz V _B = 0 V
Initial I/O isolation resistance	Minimum	R _{iso}	—	1,000 MΩ	500 V DC	

*Turn on/Turn off time

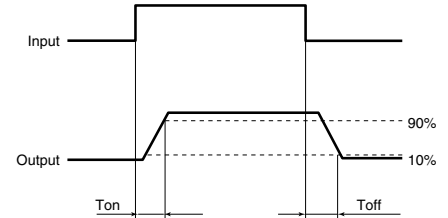

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item		Symbol	Min.	Max.	Unit
LED current		I _F	2	30	mA
AQV234(A)	Load voltage (Peak AC)	V _L	—	320	V
	Continuous load current (A connection)	I _L	—	0.12	A

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40 to +85°C
-40 to +185°F

Type of connection: A




2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 2 mA; Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)




3. Turn on time vs. ambient temperature characteristics

LED current: 2 mA;
Load voltage: 400 V (DC);
Continuous load current: 120 mA (DC)

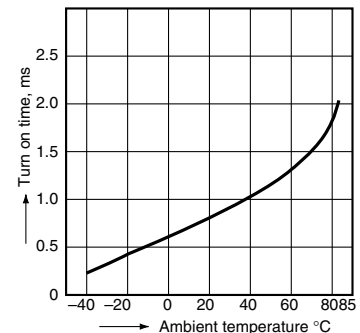


4. Turn off time vs. ambient temperature characteristics

LED current: 2 mA; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)




5. LED operate current vs. ambient temperature characteristics

Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)




6. LED turn off current vs. ambient temperature characteristics

Load voltage: 400 V (DC); Continuous load current: 120 mA (DC)

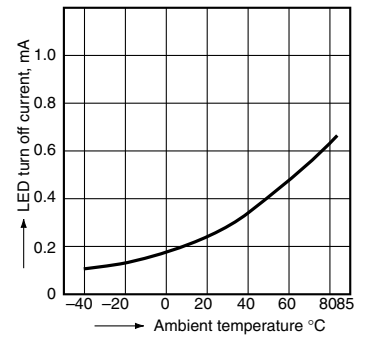


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 2 to 50 mA




8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

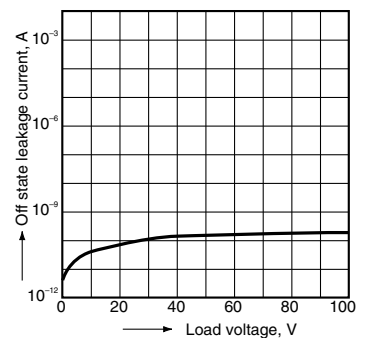


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F




11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6; Load voltage: 400 V (DC); Continuous load current: 120 mA (DC); Ambient temperature: 25°C 77°F



12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6; Frequency: 1 MHz; Ambient temperature: 25°C 77°F

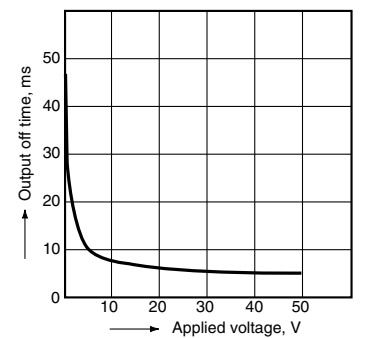

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panasonic:](#)

[AQV234](#) [AQV234A](#)