


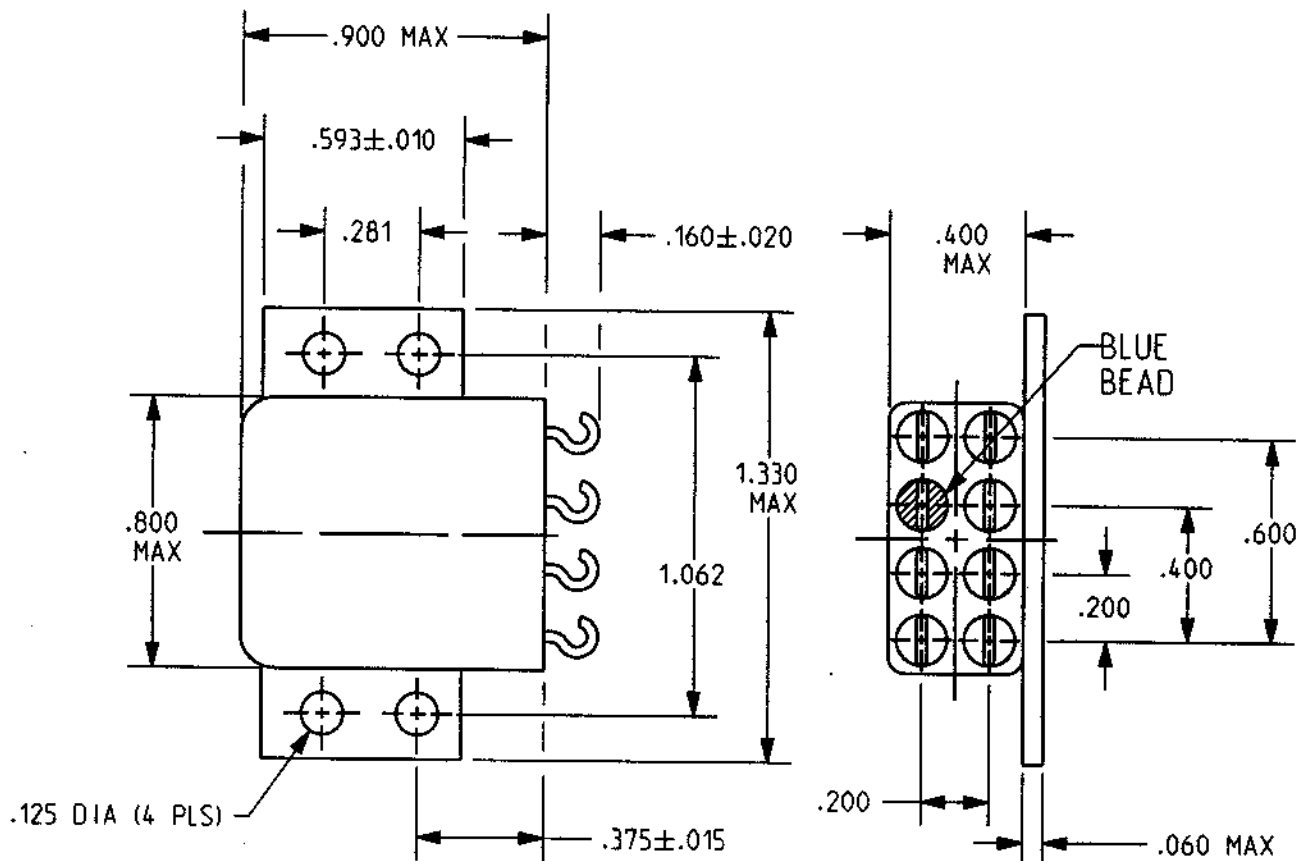

REV. 0
DCO 17615

COIL: @ 25°C

RESISTANCE 600 OHMS ±10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 8.5 VDC MAX, 2.7 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 2000 Hz @ 30 g's

SHOCK 100 g's 11 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME: 5 MS MAX

RELEASE TIME: 4 MS MAX

CONTACT BOUNCE 2.5 MS MAX

CUSTOMER DATA SHEET

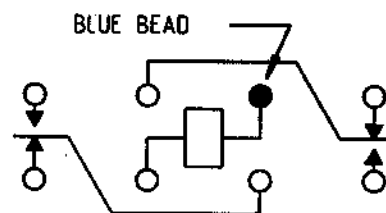

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2 AMPS
28 VDC RESISTIVE 100,000 OPERATIONS

DR. ASB 19 JUN 02

CKD 6/19/02

CII Technologies
advanced control electronic solutions

CUST. GENICOM

CUST. NO. 3SAF5062H1

REV.

TYPE "FW" RELAY

FW 11133S01

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FW11133S01](#)