
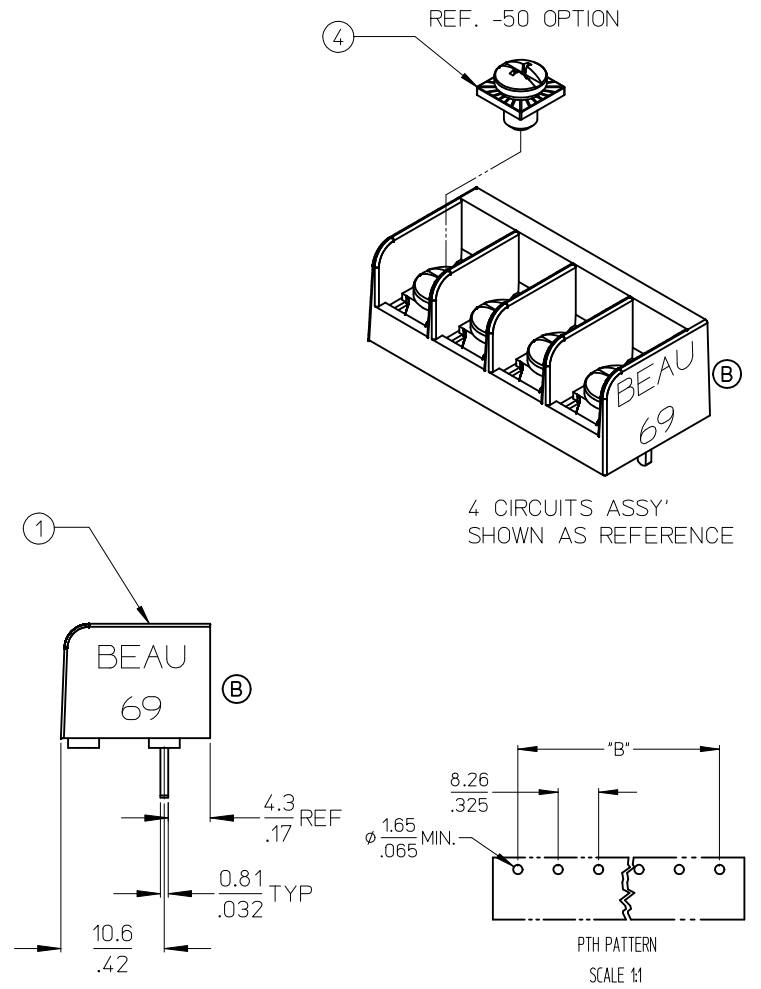


| 10                 |          |       |          | 9     |                                        |                                       |  | 8 |  |
|--------------------|----------|-------|----------|-------|----------------------------------------|---------------------------------------|--|---|--|
| NO. OF<br>CIRCUITS | DIM. "A" |       | DIM. "B" |       | ASSEMBLY<br>MATERIAL NO.<br>(STANDARD) | ASSEMBLY<br>MATERIAL NO.<br>(-50 OPT) |  |   |  |
|                    | mm       | in    | mm       | in    |                                        |                                       |  |   |  |
| 02                 | 17.9     | .71   | 8.3      | .33   | 386906602                              | 386907802                             |  |   |  |
| 03                 | 26.2     | 1.03  | 16.5     | .65   | 386906603                              | 386907803                             |  |   |  |
| 04                 | 34.4     | 1.36  | 24.8     | .98   | 386906604                              | 386907804                             |  |   |  |
| 05                 | 42.7     | 1.68  | 33.0     | 1.30  | 386906605                              | 386907805                             |  |   |  |
| 06                 | 50.9     | 2.01  | 41.3     | 1.63  | 386906606                              | 386907806                             |  |   |  |
| 07                 | 59.2     | 2.33  | 49.5     | 1.95  | 386906607                              | 386907807                             |  |   |  |
| 08                 | 67.4     | 2.66  | 57.8     | 2.28  | 386906608                              | 386907808                             |  |   |  |
| 09                 | 75.7     | 2.98  | 66.0     | 2.60  | 386906609                              | 386907809                             |  |   |  |
| 10                 | 83.9     | 3.31  | 74.3     | 2.93  | 386906610                              | 386907810                             |  |   |  |
| 11                 | 92.2     | 3.63  | 82.6     | 3.25  | 386906611                              | 386907811                             |  |   |  |
| 12                 | 100.5    | 3.96  | 90.8     | 3.58  | 386906612                              | 386907812                             |  |   |  |
| 13                 | 108.7    | 4.28  | 99.1     | 3.90  | 386906613                              | 386907813                             |  |   |  |
| 14                 | 117.0    | 4.61  | 107.3    | 4.23  | 386906614                              | 386907814                             |  |   |  |
| 15                 | 125.2    | 4.93  | 115.6    | 4.55  | 386906615                              | 386907815                             |  |   |  |
| 16                 | 133.5    | 5.26  | 123.8    | 4.88  | 386906616                              | 386907816                             |  |   |  |
| 17                 | 141.7    | 5.58  | 132.1    | 5.20  | 386906617                              | 386907817                             |  |   |  |
| 18                 | 150.0    | 5.91  | 140.3    | 5.53  | 386906618                              | 386907818                             |  |   |  |
| 19                 | 158.2    | 6.23  | 148.6    | 5.85  | 386906619                              | 386907819                             |  |   |  |
| 20                 | 166.5    | 6.56  | 156.8    | 6.18  | 386906620                              | 386907820                             |  |   |  |
| 21                 | 174.8    | 6.88  | 165.1    | 6.50  | 386906621                              | 386907821                             |  |   |  |
| 22                 | 183.0    | 7.21  | 173.4    | 6.83  | 386906622                              | 386907822                             |  |   |  |
| 23                 | 191.3    | 7.53  | 181.6    | 7.15  | 386906623                              | 386907823                             |  |   |  |
| 24                 | 199.5    | 7.86  | 189.9    | 7.48  | 386906624                              | 386907824                             |  |   |  |
| 25                 | 207.8    | 8.18  | 198.1    | 7.80  | 386906625                              | 386907825                             |  |   |  |
| 26                 | 216.0    | 8.51  | 206.4    | 8.13  | 386906626                              | 386907826                             |  |   |  |
| 27                 | 224.3    | 8.83  | 214.6    | 8.45  | 386906627                              | 386907827                             |  |   |  |
| 28                 | 232.5    | 9.16  | 222.9    | 8.78  | 386906628                              | 386907828                             |  |   |  |
| 29                 | 240.8    | 9.48  | 231.1    | 9.10  | 386906629                              | 386907829                             |  |   |  |
| 30                 | 249.0    | 9.81  | 239.4    | 9.43  | 386906630                              | 386907830                             |  |   |  |
| 31                 | 257.3    | 10.13 | 247.7    | 9.75  | 386906631                              | 386907831                             |  |   |  |
| 32                 | 265.6    | 10.46 | 255.9    | 10.08 | 386906632                              | 386907832                             |  |   |  |

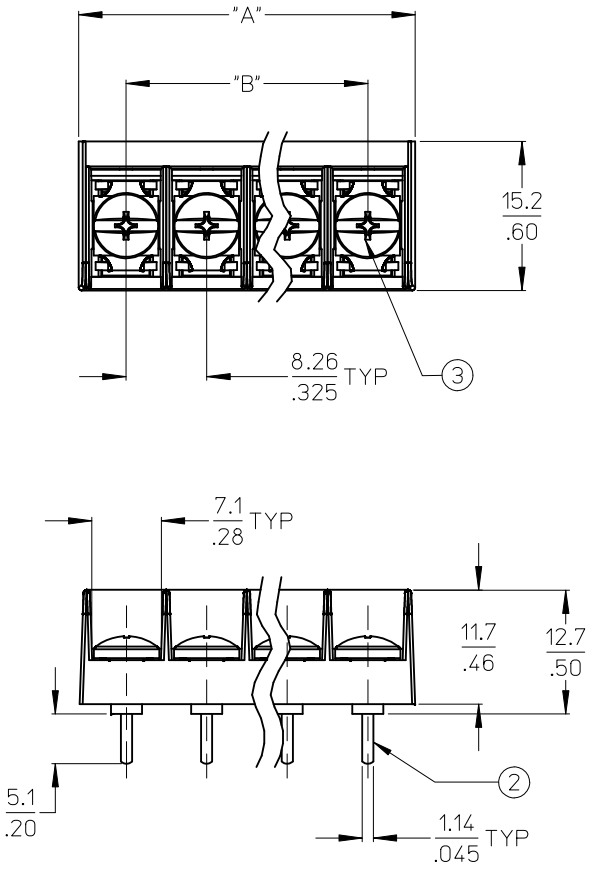

NOTES:  
1. MATERIAL: SEE TABLE  
2. FINISHES: SEE TABLE.  
3. "XX" REFERS TO THE QUANTITY OF CIRCUITS.  
4. ROHS COMPLIANT.

|      |      |                                              |                 |                    |
|------|------|----------------------------------------------|-----------------|--------------------|
| 4    | XX   | SCREW #6-32X.155 PAN PHSLZN/BR/STEEL -50 OPT | STEEL           | ZN, CLEAR CHROMATE |
| 3    | XX   | SCREW #6-32X.160 PAN PHSLN/BRASS (STANDARD)  | BRASS           | NICKEL PLATE       |
| 2    | XX   | TERMINAL, PC                                 | BRASS           | TIN PLATE          |
| 1    | 1    | INSULATOR                                    | POLYESTER (PBT) | BLACK              |
| ITEM | QTY. | DESCRIPTION                                  | MATERIAL        | FINISH             |

REMOVE "USA"  
EC NO: IPG2012-0967  
DRAWN: ENCINAS 2012/05/22  
CHKD: JMACNEIL 2012/05/31  
APPR: JMACNEIL 2012/06/01

DESCRIPTION  
REV

QUALITY SYMBOLS  
▽=0  
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)  
mm INCH  
4 PLACES ± --- ± ---  
3 PLACES ± --- ± .005  
2 PLACES ± 0.13 ± .01  
1 PLACE ± 0.3 ± ---  
ANGULAR ± 2 °  
DRAFT WHERE APPLICABLE  
MUST REMAIN  
WITHIN DIMENSIONS

DIMENSION STYLE  
MM/IN  
DRAWN BY DATE  
AHIDALGO 2007/04/02  
CHECKED BY DATE  
JENCINAS 2007/04/02  
APPROVED BY DATE  
JMACNEIL 2012/06/01  
MATERIAL NO.  
SIZE B  
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SCALE  
2:1  
DESIGN UNITS  
INCH  
THIRD ANGLE PROJECTION  
8.26/.325 SR TRI-BARRIER  
TERMINAL STRIP  
CS, PC ASSY  
MOLEX MOLEX INCORPORATED  
DOCUMENT NO.  
SD-38690-001  
SHEET NO.  
1 OF 1

tb\_frame\_B\_P\_ME\_T Rev. E 2006/04/15

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[38690-6605](#)