




## SPECIFICATIONS

PARAMETERS	VALUES	UNITS
RESONANT FREQUENCY	$2,500 \pm 300$	Hz
RESONANT IMPEDANCE (MAX)	500	Ohm
MAX INPUT VOLTAGE	20	Vp-p
CAPACITANCE @ 1kHz	$45,000 \pm 25\%$	pF
PLATE MATERIAL	STAINLESS STEEL	-
OPERATING TEMPERATURE	$-20 \sim +60$	°C
STORAGE TEMPERATURE	$-20 \sim +70$	°C

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO  
PROJECTS UNLIMITED, INC. ANY USE OR  
REPRODUCTION, IN ANY FORM, WITHOUT PRIOR  
WRITTEN PERMISSION OF PROJECTS UNLIMITED,  
INC. IS PROHIBITED.  
©2003, Projects Unlimited Inc.

## REVISION HISTORY

LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	9/24/2004	
A	REVISED DIMENSION SIZE AND STYLE	1/19/2006	B.R.
B	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	8/11/2010	B.R.

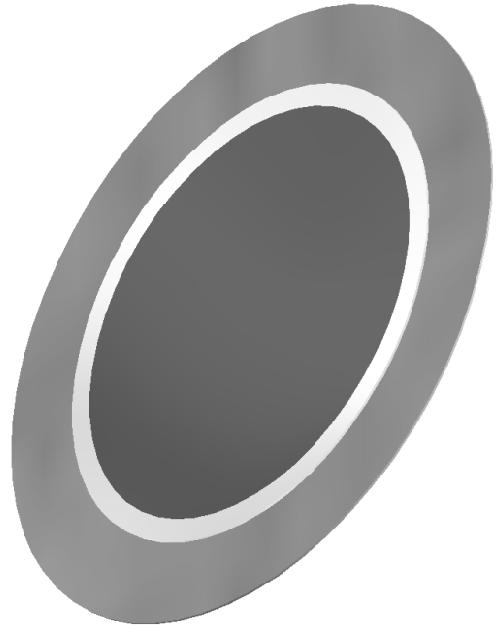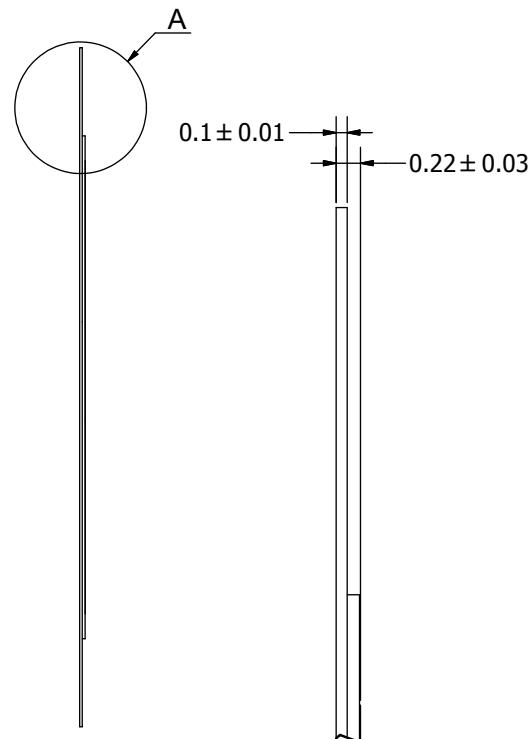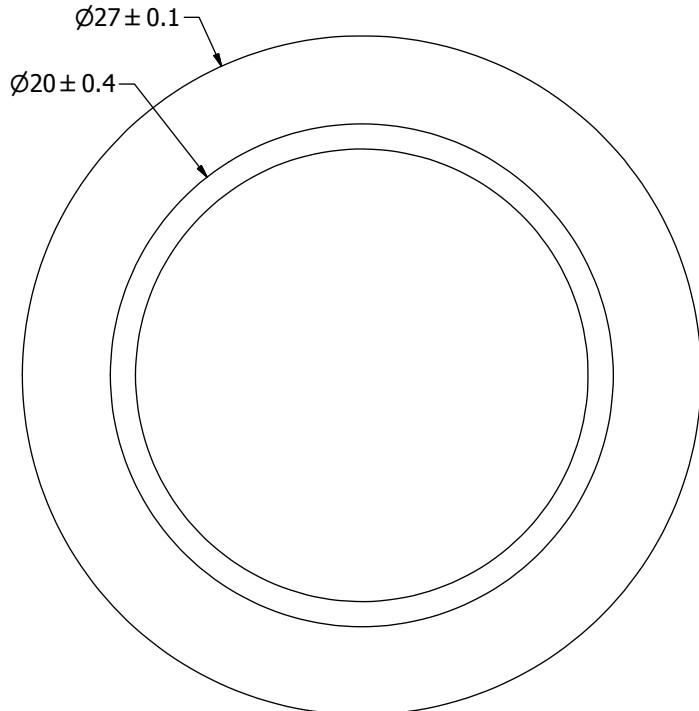

### NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	SIZE	Designed by	Date	Checked by	Date	Approved by	Date	Drawn Date	
		R.A.C.	9/24/2004	E.P.	9/27/2004	R.W.	9/27/2004	8/11/2010	
 <b>AB2725S</b> <b>Bender</b>									
AB2725S.idw									

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[PUI Audio:](#)

[AB2725S](#)