

VS-08-CS-VSIP67-OE-CH-5,0 - 1656835

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Assembled Ethernet cable, CAT5e, shielded, 2-pair, AWG 24 solid (1-wire), RAL 5021 (water blue), RJ45/IP67 on open cable end, length: 5 m



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
Weight per Piece (excluding packing)	354.0 g
Custom tariff number	85444210
Country of origin	Germany

Technical data

Mechanical characteristics

Number of positions	4
Shielded	yes
Cable structure	2x2xAWG24/1; S-UTP
Length of cable	5 m

Ambient conditions

Ambient temperature (operation)	-30 °C ... 80 °C (cable, fixed installation)
	-5 °C ... 60 °C (cable, flexible installation)
	Plug / socket
Degree of protection	IP67

Material data

Outer sheath, material	Halogen-free compound, HM 2 in acc. with VDE 0207
External sheath, color	water blue RAL 5021

Electrical characteristics

Rated voltage (III/3)	60 V
Transmission characteristics (category)	CAT5 (IEC 11801:2002)

VS-08-CS-VSIP67-OE-CH-5,0 - 1656835

Classifications

eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27279218
eCl@ss 9.0	27060311

ETIM


ETIM 2.0	EC000830
ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001855

UNSPSC


UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Drawings

Dimensional drawing

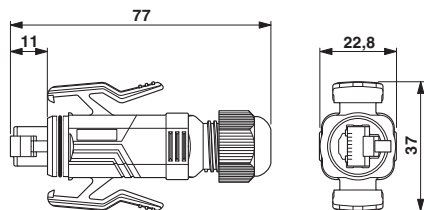

Schematic diagram

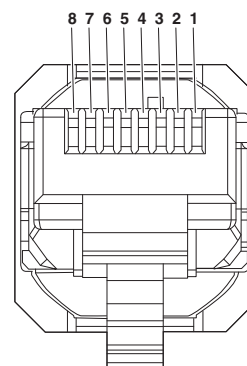


RJ45 connectors, IP67, QUICKON fast connection technology

Connector pin assignment plug RJ45

VS-08-CS-VSIP67-OE-CH-5,0 - 1656835

Schematic diagram

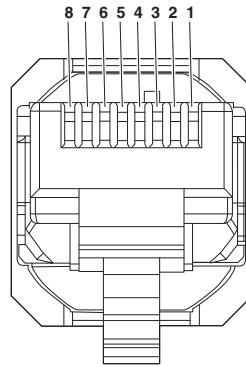

Connector pin assignment plug RJ45

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1656835](#)