

40mm sq.

San Ace 40



Model no. 109P0424R3013 is not certified.


40×40×28mm (Mass : 52g) **9P type**

Specifications The following nos. **have pulse sensors and ribs.**

| Model No. | Rated Voltage [V] | Operating Voltage Range [V] | Rated Current [A] | Rated Input [W] | Rated Speed [min ⁻¹] | Max. Airflow [m ³ /min] [CFM] | Max. Static Pressure [Pa] [inchH ₂ O] | SPL [dB(A)] | Operating Temperature [°C] | Expected Life [h] |
|---------------|-------------------|-----------------------------|-------------------|-----------------|----------------------------------|--|--|-------------|----------------------------|-------------------|
| 109P0405H3013 | 5 | 4.5 to 5.5 | 0.68 | 3.4 | 8,700 | 0.32 11.3 | 102.9 0.414 | 37 | -20 to +70 | 40,000/60°C |
| 109P0405F3013 | | | 0.28 | 1.4 | 6,700 | 0.244 8.6 | 58.8 0.236 | 30 | | 60,000/60°C |
| 109P0412K3013 | 12 | 8 to 13.2 | 0.55 | 6.6 | 15,500 | 0.59 20.8 | 340 1.365 | 50 | -20 to +60 | 40,000/60°C |
| 109P0412J3013 | | | 0.35 | 4.2 | 12,500 | 0.46 16.2 | 210 0.843 | 44 | | |
| 109P0412G3013 | | 7 to 13.2 | 0.31 | 3.72 | 11,500 | 0.42 14.8 | 179 0.719 | 42 | -20 to +70 | 60,000/60°C |
| 109P0412B3013 | | | 0.28 | 3.36 | 10,300 | 0.38 13.4 | 143 0.574 | 40 | | |
| 109P0412H3013 | | 7 to 13.8 | 0.195 | 2.34 | 8,700 | 0.32 11.3 | 102.9 0.414 | 37 | -20 to +70 | 60,000/60°C |
| 109P0412F3013 | | | 0.105 | 1.26 | 6,700 | 0.244 8.6 | 58.8 0.236 | 30 | | |
| 109P0412M3013 | | 10.2 to 13.8 | 0.045 | 0.54 | 4,100 | 0.15 5.3 | 21.6 0.087 | 20 | | |
| 109P0424R3013 | | 24 | 12 to 26.4 | 0.25 | 6 | 14,000 | 0.51 18.0 | 263.4 1.057 | 47 | -20 to +60 |
| 109P0424J3013 | 0.18 | | | 4.32 | 12,500 | 0.46 16.2 | 210 0.843 | 44 | | |
| 109P0424G3013 | 0.19 | | | 4.56 | 11,500 | 0.42 14.8 | 179 0.719 | 42 | | |
| 109P0424B3013 | 12 to 27.6 | | 0.13 | 3.12 | 10,300 | 0.38 13.4 | 143 0.574 | 40 | -20 to +70 | 60,000/60°C |
| 109P0424H3013 | | | 0.095 | 2.28 | 8,700 | 0.32 11.3 | 102.9 0.414 | 37 | | |
| 109P0424F3013 | | | 14 to 27.6 | 0.055 | 1.32 | 6,700 | 0.244 8.6 | 58.8 0.236 | | |

Models without sensors, or with lock sensors, or PWM control function are available as options. Please refer to the index (pp. 466 to 467).

Dimensions (unit: mm)

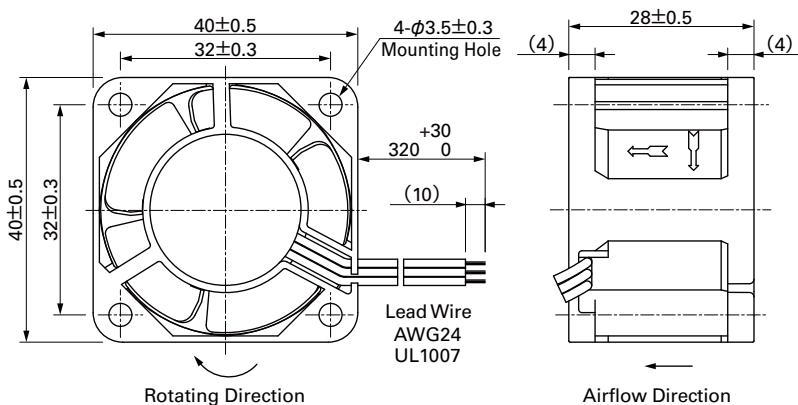


40mm sq.


San Ace 40

40×40×28mm [Mass : 52g]


Airflow - Static Pressure Characteristics

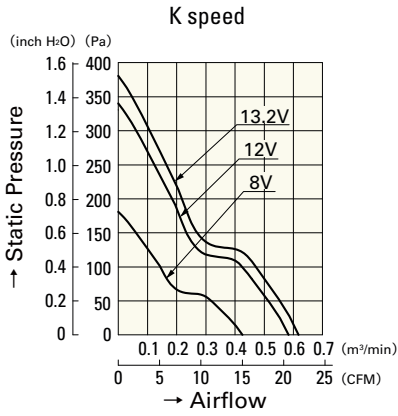


109P0412K3013

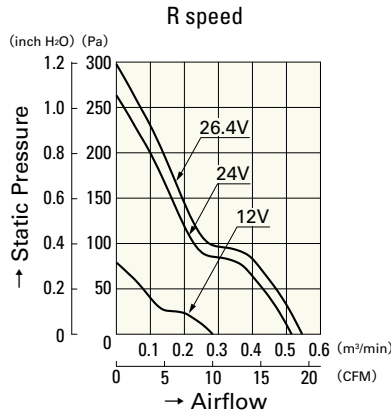


109P0424R3013

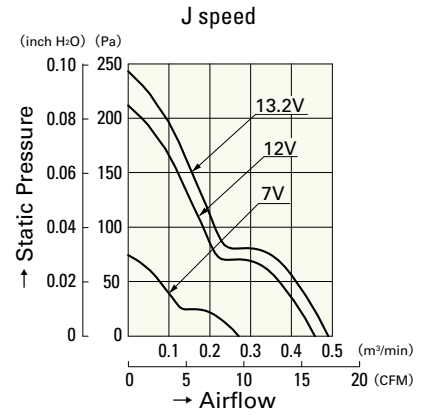


109P0412J3013

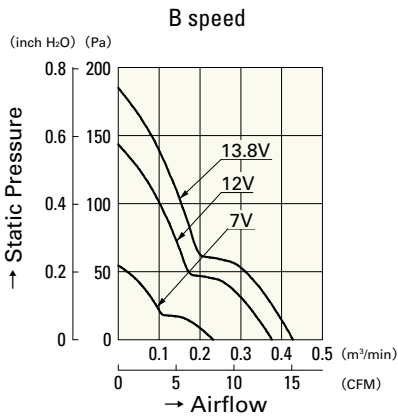


109P0412B3013

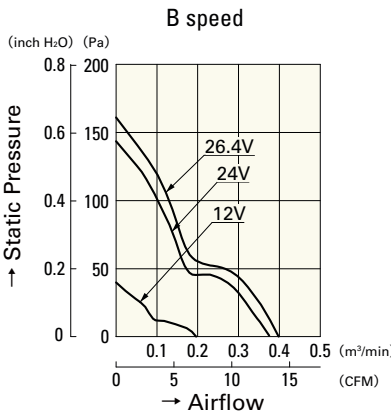

109P0424B3013

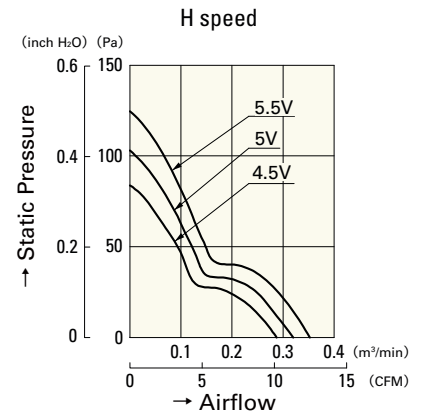


109P0405H3013

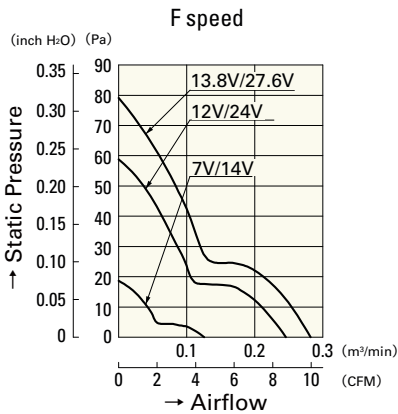


109P0412F3013


109P0424F3013

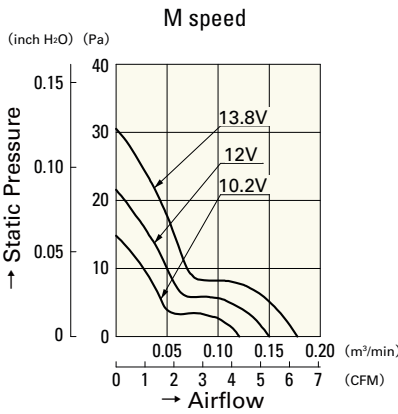


109P0412M3013

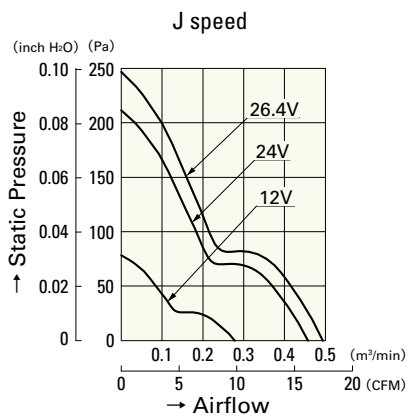


109P0424J3013

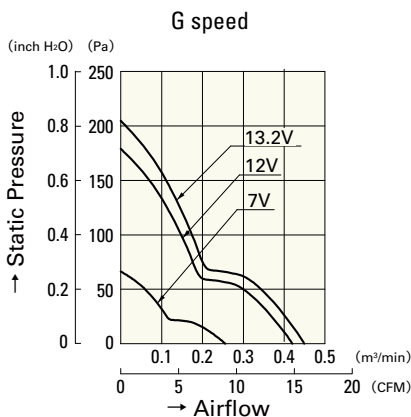


109P0412G3013

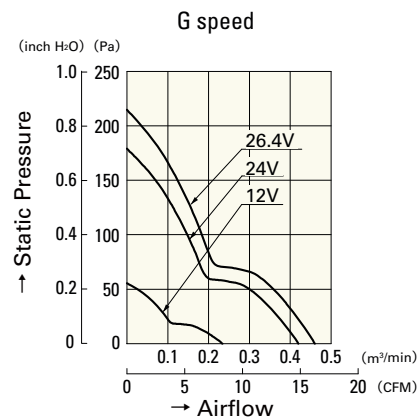


109P0424G3013

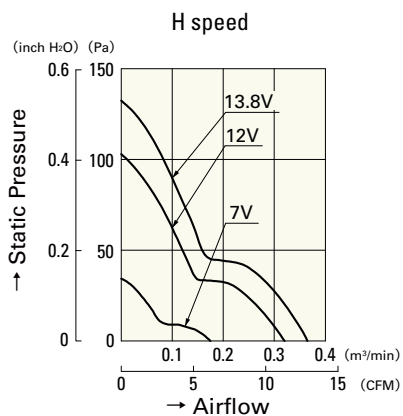

109P0412H3013

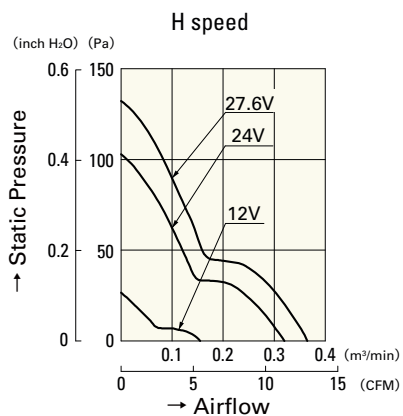

109P0424H3013

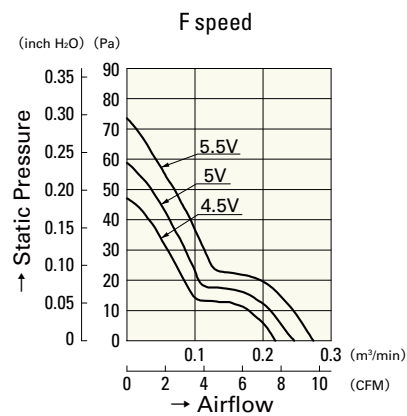

109P0405F3013

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Sanyo Denki:](#)

[109P0412A701](#)