
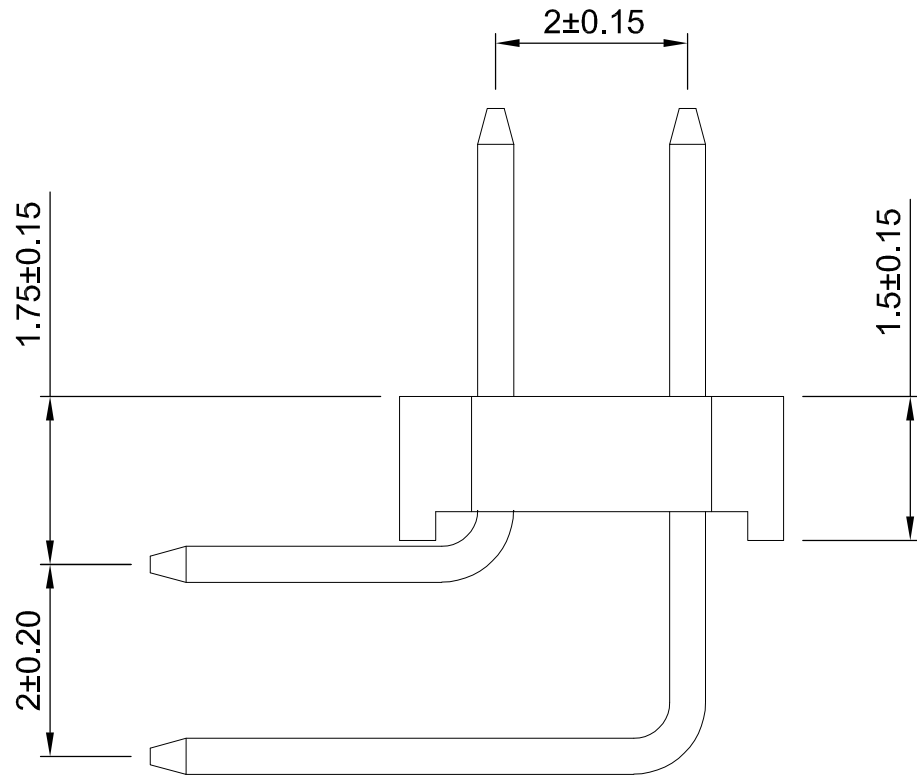
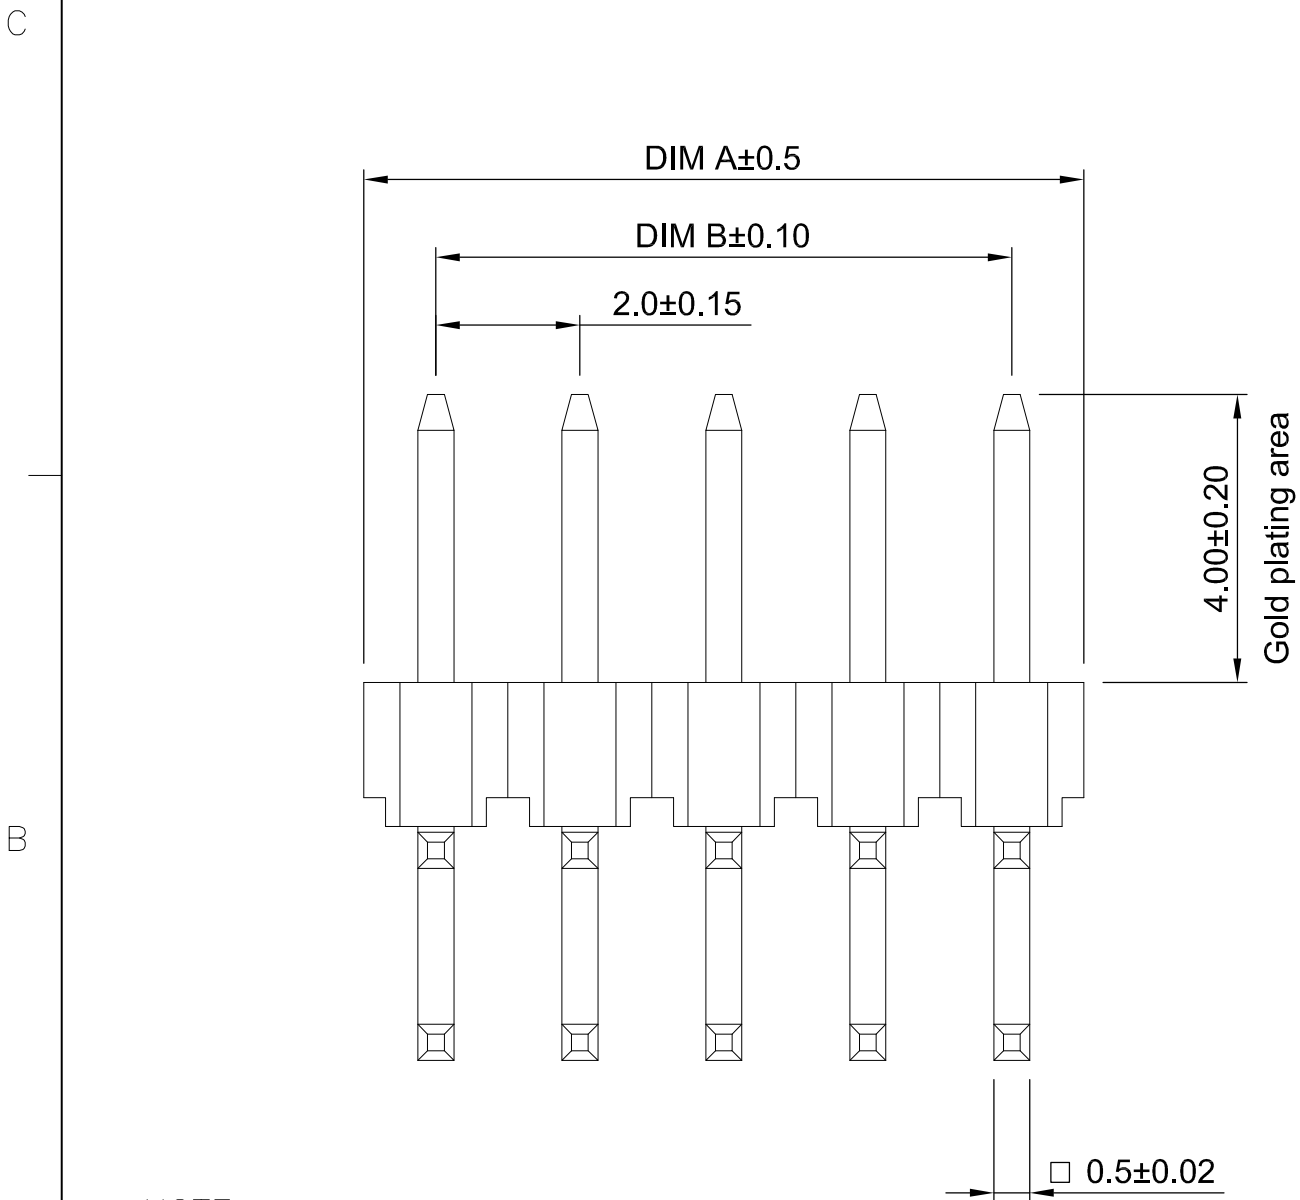
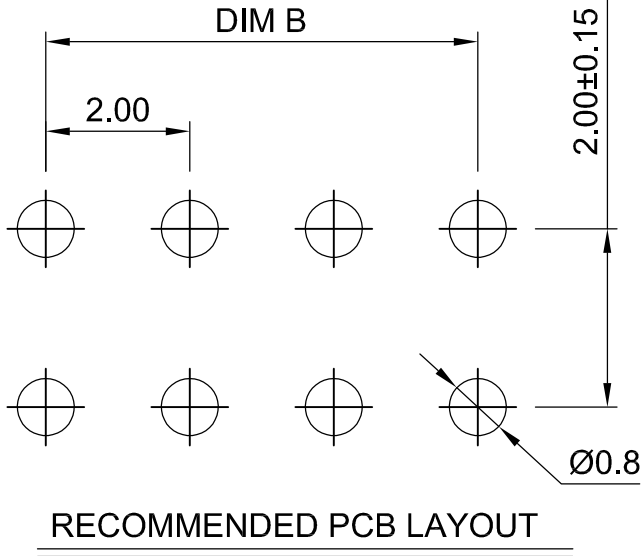


LOC	DIST	REVISIONS					
IR	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B2	Obsolescence of P/N 1-1734507-2	01AUG2013	SMT	RP

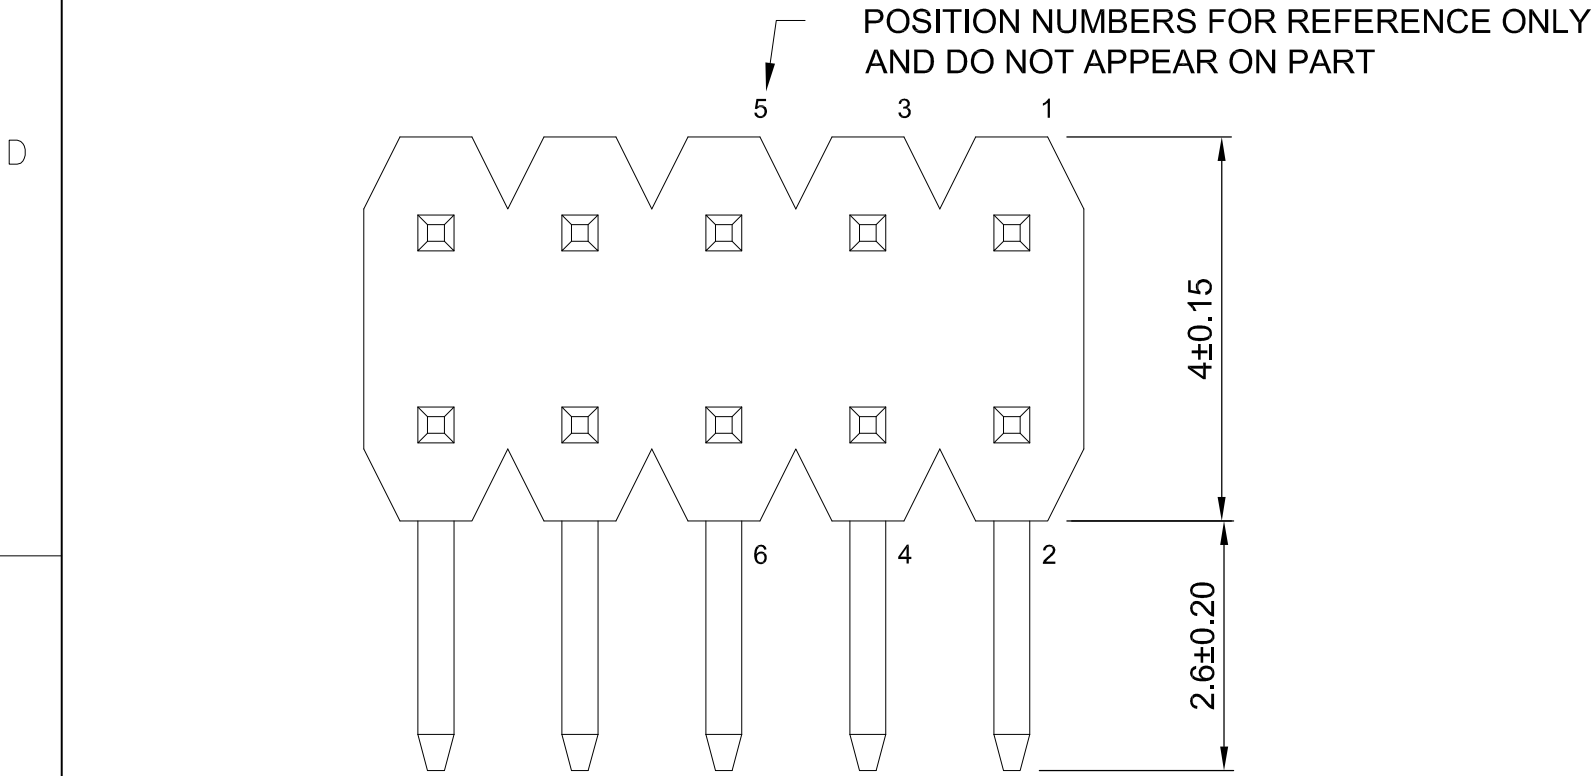

NOTE:

- 1


MATERIAL:
HOUSING: PA6T WITH 30% GF, UL 94V-0, BLACK COLOR.
CONTACTS: PHOSPHOR BRONZE.
- 2

FINISH:
CONTACTS: 0.254mm [10m"] MIN. GOLD PLATED ON CONTACT AREA,
2.54mm [100m"] MIN. MATTE-TIN ON SOLDER TAIL, WITH
ENTIRE CONTACT UNDERPLATED 1.27mm [50m"] MIN. NICKEL.
3. WAVE SOLDER CAPABLE TO 265°C PER TE TEST SPEC.
109-202, CONDITION B.
4. APPLICATION :
SOLDERTAIL LENGTH 2.6 FOR PCB THICKNESS 1.6±0.1
5. QUALIFICATION TEST REPORT:501-57197

OBSOLETE	80.00	78.00	80	8-	-0
OBSOLETE	78.00	76.00	78	7-	-8
OBSOLETE	76.00	74.00	76	7-	-6
OBSOLETE	74.00	72.00	74	7-	-4
OBSOLETE	72.00	70.00	72	7-	-2
OBSOLETE	70.00	68.00	70	7-	-0
OBSOLETE	68.00	66.00	68	6-	-8
OBSOLETE	66.00	64.00	66	6-	-6
OBSOLETE	64.00	62.00	64	6-	-4
OBSOLETE	62.00	60.00	62	6-	-2
OBSOLETE	60.00	58.00	60	6-	-0
OBSOLETE	58.00	56.00	58	5-	-8
OBSOLETE	56.00	54.00	56	5-	-6
OBSOLETE	54.00	52.00	54	5-	-4
OBSOLETE	52.00	50.00	52	5-	-2
	50.00	48.00	50	5-	-0
	48.00	46.00	48	4-	-8
	46.00	44.00	46	4-	-6
OBSOLETE	44.00	42.00	44	4-	-4
	42.00	40.00	42	4-	-2
OBSOLETE	40.00	38.00	40	4-	-0
OBSOLETE	40.00	38.00	40	3-	-9
	38.00	36.00	38	3-	-8
	36.00	34.00	36	3-	-6
	34.00	32.00	34	3-	-4
	32.00	30.00	32	3-	-2
	30.00	28.00	30	3-	-0
	28.00	26.00	28	2-	-8
	26.00	24.00	26	2-	-6
	24.00	22.00	24	2-	-4
	22.00	20.00	22	2-	-2
OBSOLETE	20.00	18.00	20	2-	-0
	18.00	16.00	18	1-	-8
	16.00	14.00	16	1-	-6
	14.00	12.00	14	1-	-4
OBSOLETE	12.00	10.00	12	1-	-2
OBSOLETE	10.00	8.00	10	1-	-0
OBSOLETE	8.00	6.00	8		-8
	6.00	4.00	6		-6
	4.00	2.00	4		1734507-4
VOID POS. NO.	A	B	POSITION NUMBER	PART NUMBER	
	DIMENSIONS				

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	27JUN2007	TE Connectivity	
			CHK	27JUN2007		
			APVD	27JUN2007	NAME	
			PRODUCT SPEC			
			APPLICATION SPEC		AMPMODU, 2.0mm PITCH, POST HDR, RIGHT ANGLE, MOUNT TYPE	
			WEIGHT	-		
			CUSTOMER DRAWING		SCALE	1:1
					SHEET	1 of 2
					REV	B2

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
IR	—		—	SEE SHEET 1	—	—	—

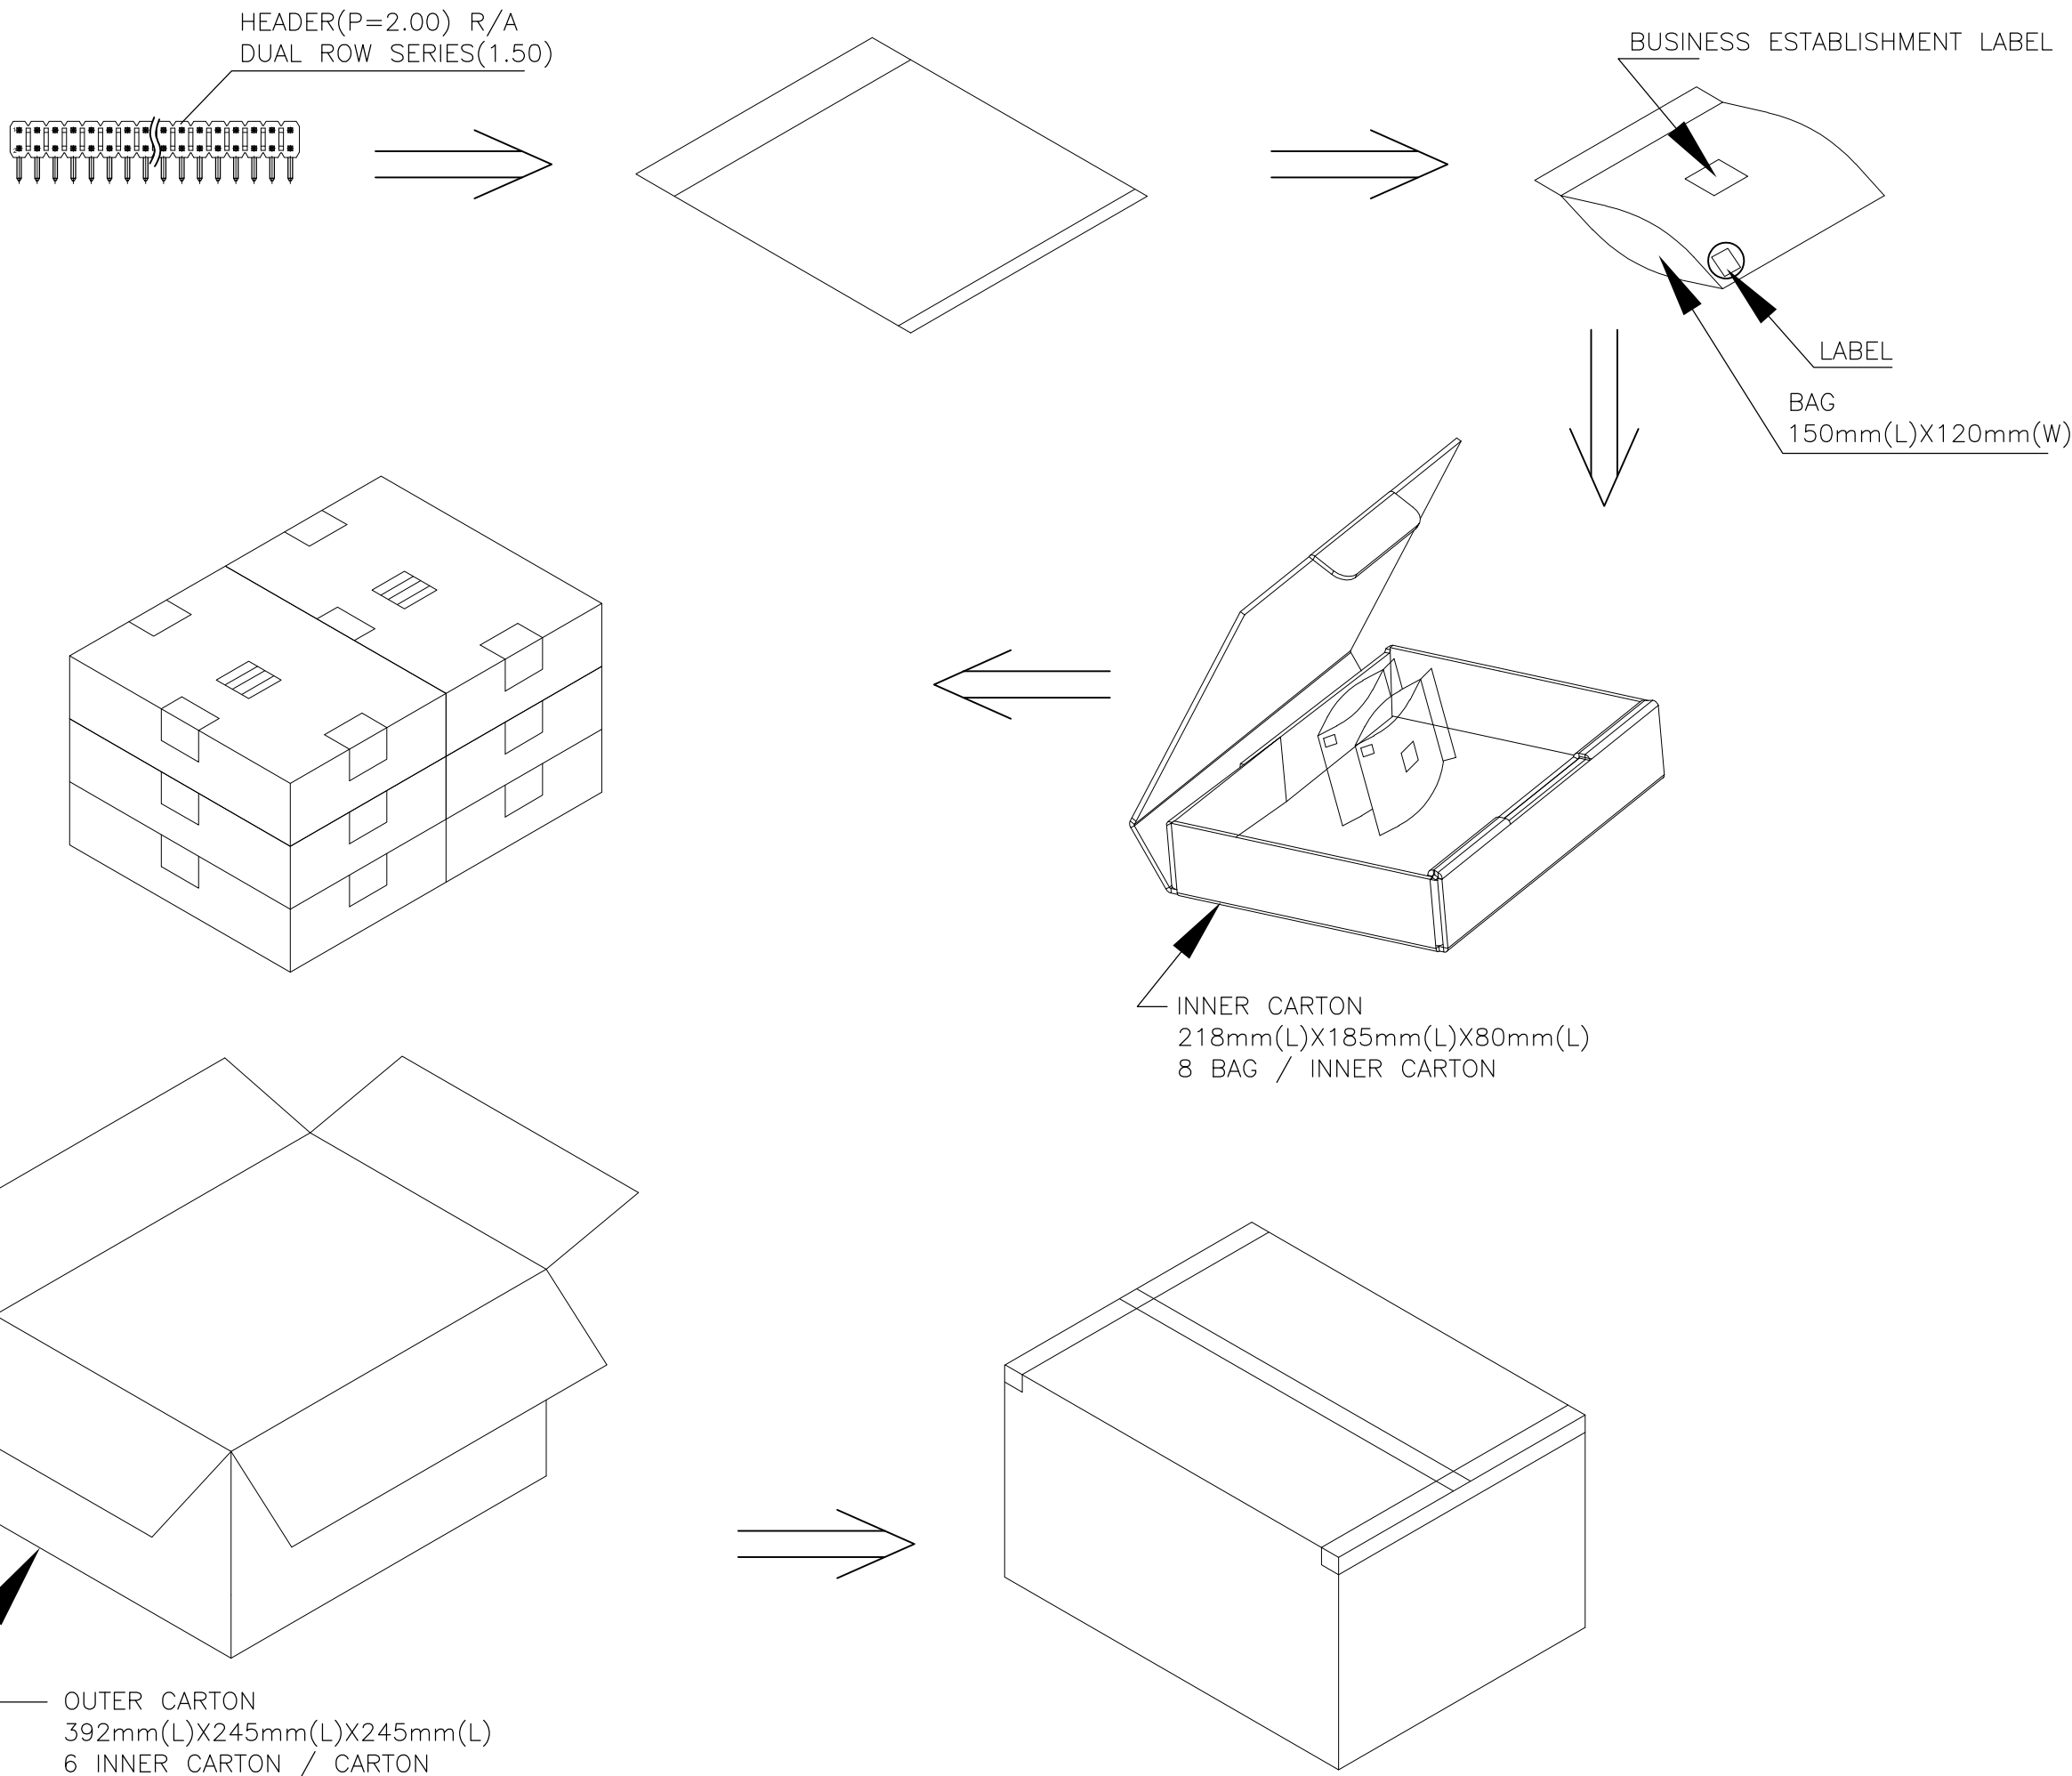

	4.887	3.505	30	8	6	1440	80	8-	-0
OBSOLETE	4.779	3.417	30	8	6	1440	78	7-	-8
OBSOLETE	4.712	3.330	30	8	6	1440	76	7-	-6
OBSOLETE	4.624	3.242	30	8	6	1440	74	7-	-4
OBSOLETE	4.536	3.154	30	8	6	1440	72	7-	-2
OBSOLETE	5.471	4.089	40	8	6	1920	70	7-	-0
OBSOLETE	5.354	3.972	40	8	6	1920	68	6-	-8
OBSOLETE	5.237	3.855	40	8	6	1920	66	6-	-6
OBSOLETE	5.121	3.739	40	8	6	1920	64	6-	-4
OBSOLETE	5.004	3.622	40	8	6	1920	62	6-	-2
OBSOLETE	4.887	3.505	40	8	6	1920	60	6-	-0
OBSOLETE	4.770	3.388	40	8	6	1920	58	5-	-8
OBSOLETE	5.062	3.680	45	8	6	2160	56	5-	-6
OBSOLETE	4.931	3.549	45	8	6	2160	54	5-	-4
OBSOLETE	4.779	3.417	45	8	6	2160	52	5-	-2
	5.033	3.651	50	8	6	2400	50	5-	-0
	4.887	3.505	50	8	6	2400	48	4-	-8
	4.741	3.359	50	8	6	2400	46	4-	-6
OBSOLETE	4.595	3.213	50	8	6	2400	44	4-	-4
	4.449	3.067	50	8	6	2400	42	4-	-2
OBSOLETE	6.055	4.673	80	8	6	3840	40	4-	-0
OBSOLETE	5.978	4.596	80	8	6	3840	39	3-	-9
	5.821	4.439	80	8	6	3840	38	3-	-8
	5.588	4.206	80	8	6	3840	36	3-	-6
	5.354	3.972	80	8	6	3840	34	3-	-4
	5.121	3.739	80	8	6	3840	32	3-	-2
	5.763	4.381	100	8	6	4800	30	3-	-0
	5.471	4.089	100	8	6	4800	28	2-	-8
	5.179	3.797	100	8	6	4800	26	2-	-6
	6.639	5.257	150	8	6	7200	24	2-	-4
	6.201	4.819	150	8	6	7200	22	2-	-2
OBSOLETE	5.767	4.385	150	8	6	7200	20	2-	-0
	6.639	5.257	200	8	6	9600	18	1-	-8
	6.055	4.673	200	8	6	9600	16	1-	-6
	6.493	5.111	250	8	6	12000	14	1-	-4
OBSOLETE	6.638	5.256	300	8	6	14400	12	1-	-2
OBSOLETE	5.763	4.381	300	8	6	14400	10	1-	-0
OBSOLETE	4.887	3.505	300	8	6	14400	8		-8
	4.887	3.505	400	8	6	19200	6		-6
	4.302	2.920	500	8	6	24000	4		1734507-4
	GROSS WEIGHT(Kg)	NET WEIGHT (Kg)	PCS/BAG	BAG/INNER CARTON	INNER CARTON /CARTON	QUANTITY	NO. OF POSTS	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
SEE SHEET 1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± 0.20
2 PLC	± 0.10
3 PLC	± 0.05
4 PLC	± -
ANGLES	± -
FINISH	SEE SHEET 1

DWN
O.HU
27JUN2007

CHK
S.HOU
27JUN2007

APVD
W.J.KE
27JUN2007

PRODUCT SPEC
SEE SHEET1

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
AMPMODU, 2.0mm PITCH, POST HDR,
RIGHT ANGLE, MOUNT TYPE

SIZE A2	CAGE CODE 00779	DRAWING NO C=1734507	RESTRICTED TO -
------------	--------------------	-------------------------	--------------------

SCALE 1:1	SHEET 2 OF 2	REV B2
--------------	-----------------	-----------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1734507-6](#)