


REVISIONS							
REV	ECO	DESCRIPTION	DATE	BY	APPR		
Α	-	RELEASE	19SEP13	DRP	-		


KIT, AT SERIES, 6 POS PLUG, CONTACTS, AND WEDGELOCK

AT06-6S-KIT01

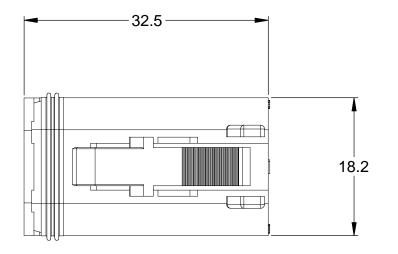

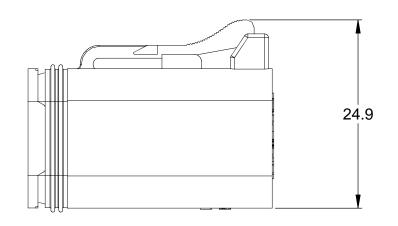



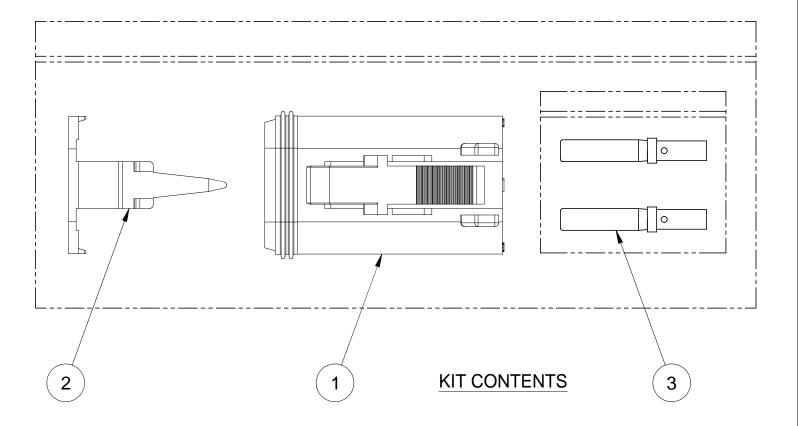

## **REFERENCE DIMENSIONS - ASSEMBLED**

NOTES: UNLESS OTHERWISE SPECIFIED

## 1. MATERIAL:

HOUSING: THERMOPLASTIC; COLOR: GREY WEDGELOCK: THERMOPLASTIC; COLOR: GREEN SEALS: SILICONE RUBBER

CONTACTS: COPPER ALLOY; NICKEL PLATED

## 2. SPECIFICATIONS:

- 2.1 CURRENT RATING: 13 AMPS
- 2.2 OPERATING TEMPERATURE: -55°C TO +125°C
- 2.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
- 2.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
- 2.5 CONTACT MILLIVOLT DROP: 60 MILLIVOLT DROP @ 13 AMP TEST CURRENT.
- 2.6 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
  2.7 CONNECTOR MATING CYCLE DURABILITY: 100 CYCLES

- NOTES LINE FOR STUFFINISE OPESIFIED
- 3. MATING PART: AT04-6P\* RECEPTACLE (\* = MODIFICATIONS AND COLORS)
- 4. AVAILABLE HAND CRIMPER: CA-5D12
- 5. ALL COMPONENTS ARE ROHS COMPLIANT.
- 6. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 7 WIRE RANGE OF CONTACTS INCLUDED IN KIT: 16 - 20 AWG
- 8 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL.	MAX. INSUL.	TYPICAL
SIZE	O.D.	O.D.	WIRE RANGE
16	2.24 mm (.088 in)	3.68 mm (.145 in)	14 - 20 AWG

	AW6S S-WEDGELOCK, 6 POSITION, AT SERIES 2 AT06-6S PLUG, 6 SOCKET, AT SERIES 1			2		
6	AT62-201-16141	CONTACT, SOCKET, SOLID, SIZE 16, 16 - 20 AWG	3			
1	AW6S	S-WEDGELOCK, 6 POSITION, AT SERIES	2			
1	AT06-6S	PLUG, 6 SOCKET, AT SERIES	1			
QUANTITY	PART NUMBER	DESCRIPTION	ITEM	_		
	MATERIALS LIST					

	1	AT06-6S		[F	PLUG, 63	SOCK	ET, A	L SERIES		1
	QUANTITY	PART N	IUMBER			DESCRIPTION			ITEN	
			Г	MAT	[ERI	٩LS	S LI	ST		•
		WISE SPECIFIED	SIGNATURES		S DATE	Amphono		nol		
		) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30   Fractions +1/64		D.PARKS	19SEP13	Amphenol				
	2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:			Sine Systems - www.amphenol-sine.com				
	3) Note reference = X		ENGINEER:	NGINEER:		44724 Morley Drive Clinton Township, MI 48036				
	MATERIAL SPECIFICA	TIONS:	APPROVAL:					Clinton Township, wii 460	J30	
	PROCESS SPECIFICATIONS:		CUSTOMER:			KIT, AT SERIES, 6 POSITION PLUG, CONTACTS, AND WEDGELOCK				
			SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL							
					B	C-	AT06-6S-K	(IT01	A	
	NEXT ASS'Y:		MANUFACTUR		DNS.	SCALE:	IONE		SHEET 1 OF	1