

No OF POSITIONS

BCS-1XX-XXX-X-XXX

-01 THRU -50

PLATING SPECIFICATIONS (SEE TABLE 1)

- -T: MATTE TIN CONTACT AND TAIL
- 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA MATTE TIN ON TAIL
- 3µ" FLASH SELECTIVE GOLD CONTACT AREA, MATTE TIN ON TAIL
- 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- 30µ" HEAVY GOLD IN CONTACT AREA 3µ" GOLD ON TAIL
- -SM: 30µ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- -TM: MATTE TIN CONTACT AND TAIL
- -LM: 10µ" LIGHT SELECTIVE GOLD IN CONTACT AREA MATTE TIN ON TAIL
- -FM: 3µ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- -LTL: 10µ'' LIGHT SELECTIVE GOLD IN CONTACT AREA, TIN LEAD (90/10 +/-5%) ON TAIL


POLARIZING OPTION INSERT PK-06-N INTO SPECIFIED POS AND BREAK OFF TAB (NOT AVAILABLE FOR -BE OPTION)

ENTRY SPECIFICATION

- -DE: DUAL ENTRY (SEE TABLE 1)
- -TE: TOP ENTRY (SEE TABLE 1)
- -HE: HORIZONTAL ENTRY (SEE TABLE 1)
- -PE: PASS-THROUGH ENTRY (SEE TABLE 1)
- -DE-BE: (SEE TABLE 1)
- -PE-BE: (SEE TABLE 1)

BODY SPECIFICATION

- -S: SINGLE ROW (SEE TABLE 1)
- -D: DOUBLE ROW (SEE TABLE 1)

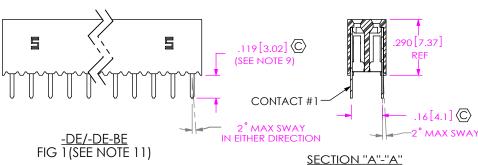







TABLE 1					
ENTRY SPEC	BODY SPEC	CONTACT #1	CONTACT #2		
-S-DE (SEE FIG 1)	SSM-XX-S	C-95-01-X			
-D-DE (SEE FIG 1)	SSM-XX-D	C-95-01-X			
-S-TE (SEE FIG 3)	SSM-XX-S	C-95-09-X			
-D-TE (SEE FIG 3)	SSM-XX-D	C-95-09-XXX			
-S-HE (SEE FIG 2)	BCH-XX-S	C-58-05-X			
-D-HE (SEE FIG 2)	BCH-XX-D	C-58-04-X	C-58-03-X		
-S-PE (SEE FIG 4)	SSM-XX-S	C-166-10-X			
-D-PE (SEE FIG 4)	SSM-XX-D	C-166-10-X			
-S-DE-BE (SEE FIG 1)	SSM-XX-S-BE	C-95-01-X			
-D-DE-BE (SEE FIG 1)	SSM-XX-D	C-95-01-X			
-S-PE-BE (SEE FIG 4)	SSM-XX-S-BE	C-166-10-X			
-D-PE-BE (SEE FIG 4)	SSM-XX-D	C-166-10-X			

SECTION "B"-"B" BCS-1XX-X-S-DE BCS-1XX-X-D-DE





(-TE TAIL ORIENTATION)



(-HE TAIL ORIENTATION)

(-PE TAIL ORIENTATION)

PHONE: 812-944-6733

e-Mail info@SAMTEC.com

1. © REPRESENTS CRITICAL DIM. FOR STATISTICAL PROCESS CONTROL. 2. MINIMUM PUSHOUT FORCE TO BE: 1 LB.

- 3. [] DIMENSIONS ARE IN MILLIMETERS.
- 4. MINIMUM WALL THICKNESS ON CUT PARTS: .009 [0.23].
- 5. CUT PARTS TO BE SYMMETRICAL ABOUT Q .
- 6. 1st POSITION WILL ALWAYS POINT UP ON TOP VIEW AS SHOWN.
- 7. 1 THROUGH 4 POSITIONS ARE TO BE LAYER PACKAGED, 5 THROUGH 50 POSITIONS ARE TO BE TUBED FOR ALL ENTRY SPECIFICATION EXCEPT BCS-S-HE AND BCS-D-HE. FOR BCS-S-HE AND BCS-D-HE, 1 THROUGH 3 POSITIONS ARE TO BE LAYER PACKAGED, 4 THROUGH 50 POSITIONS ARE TO BE TUBED.
- 8. DAMAGE TO THE CUT SURFACE CAN NOT EFFECT LEAD-IN OF THE CORES.
- 9. MAXIMUM VARIATION WITHIN A ROW: .006 [0.15]. MAXIMUM VARIATION FROM ROW TO ROW: .012 [0.30].
- 10. MAXIMUM CUT FLASH: .015 [0.38]
- 11. CHAMFERED END-WALLS MAY OR MAY NOT BE PRESENT ON ONE OR BOTH ENDS OF FINISHED GOOD.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES

TOLERANCES ARE: DECIMALS **ANGLES** .XX: ±.01[0.3] .XXX: ±.005[0.13]

.XXXX: ±.0020[0.051]

POSITION 01

PROPRIETARY INFORMATION AND ALL DESIGN AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, OR PART. TO ANY LINAUTHORIZED PERSON OR ENTITY NOR OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS

THIS DOCUMENT CONTAINS CONFIDENTIAL AND

PROPRIETARY NOTE

DO NOT SCALE DRAWING

INSULATOR: GLASS FILLED LCP UL 94 VO, COLOR: BLACK CONTACT: PHOS. BRONZE

DESCRIPTION

BOX CONNECTOR SOCKET STRIP

FAX: 812-948-5047

code 55322

DWG. NO.


BCS-1XX-XXX-X-XXX


BY: KOLB


520 PARK EAST BLVD, NEW ALBANY, IN 47150

09/12/1991 | SHEET 1 OF 3

F:\DWG\MISC\MKTG\BCS-1XX-XXX-X-XXX-MKT.SLDDRW

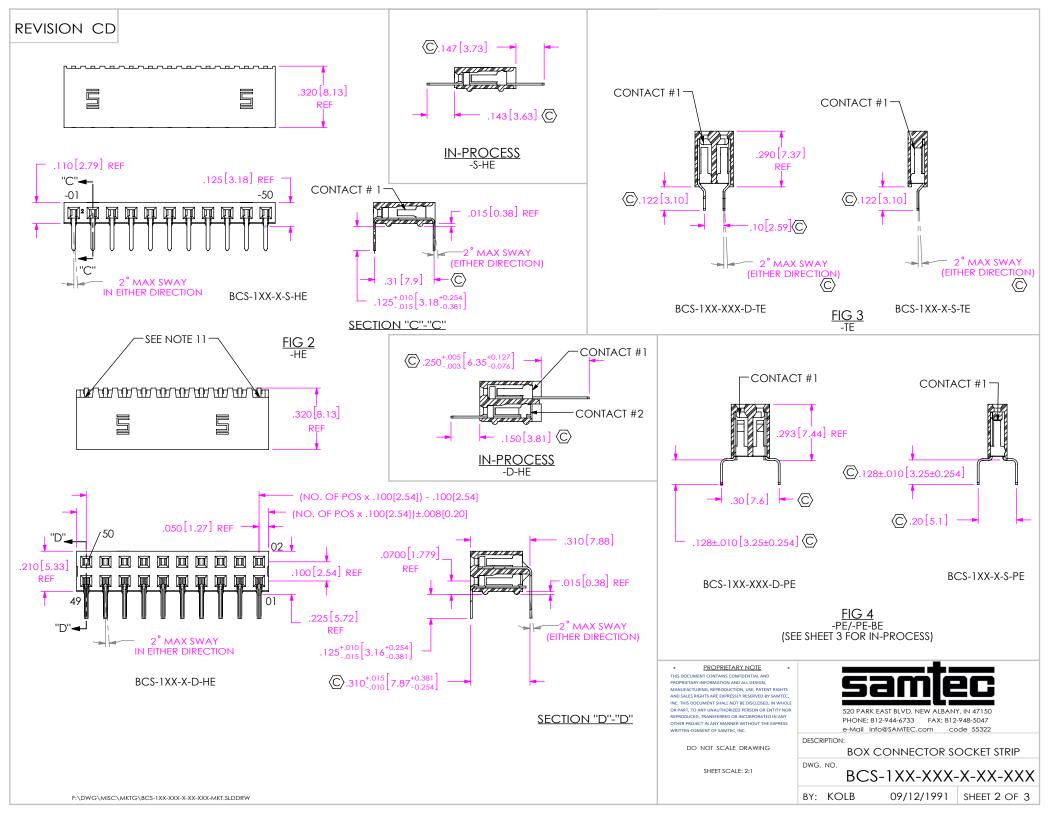

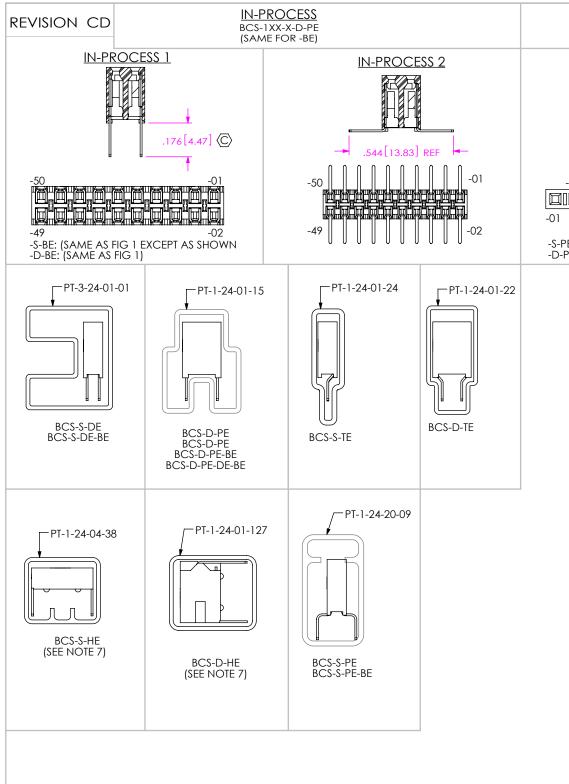




IN-PROCESS

BCS-1XX-X-S-PE

(SAME FOR -BE)



	IN-PROCESS 2 .445[11.31] REF				
)	-02 -50 -01 (SEE NOTE 6) -49				

PART NUMBER	TUBE	PLUG
BCS-S-DE	PT-3-24-01-01	TP-03 (2)
BCS-D-DE	PT-1-24-01-15	TP-03 (2)
BCS-S-TE	PT-1-24-01-24	TP-24 (2)
BCS-D-TE	PT-1-24-01-22	TP-03 (2)
BCS-S-HE	PT-1-24-04-38	TP-03 (2)
BCS-D-HE	PT-1-24-01-127	TP-03 (2)
BCS-S-PE	PT-1-24-20-09	TP-03 (2)
BCS-D-PE	PT-1-24-01-15	TP-03 (2)
BCS-S-DE-BE	PT-3-24-01-01	TP-03 (2)
BCS-D-DE-BE	PT-1-24-01-15	TP-03 (2)
BCS-S-PE-BE	PT-1-24-20-09	TP-03 (2)
BCS-D-PE-BE	PT-1-24-01-15	TP-03 (2)



REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail info@SAMTEC.com code 55322

DESCRIPTION:

BOX CONNECTOR SOCKET STRIP

DWG. NO.

BCS-1XX-XXX-X-XXX

BY: KOLB 09/12/1991 SHEET 3 OF 3