

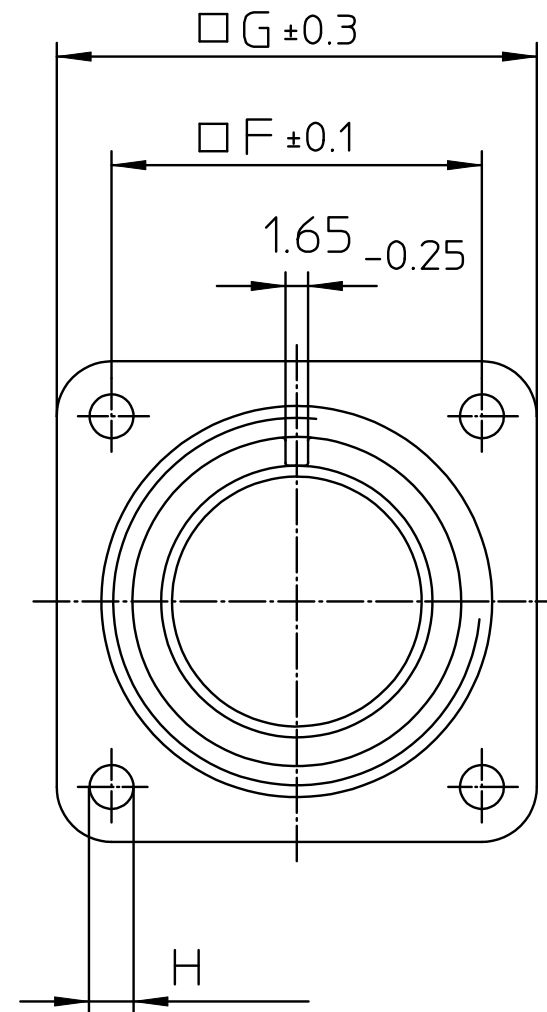


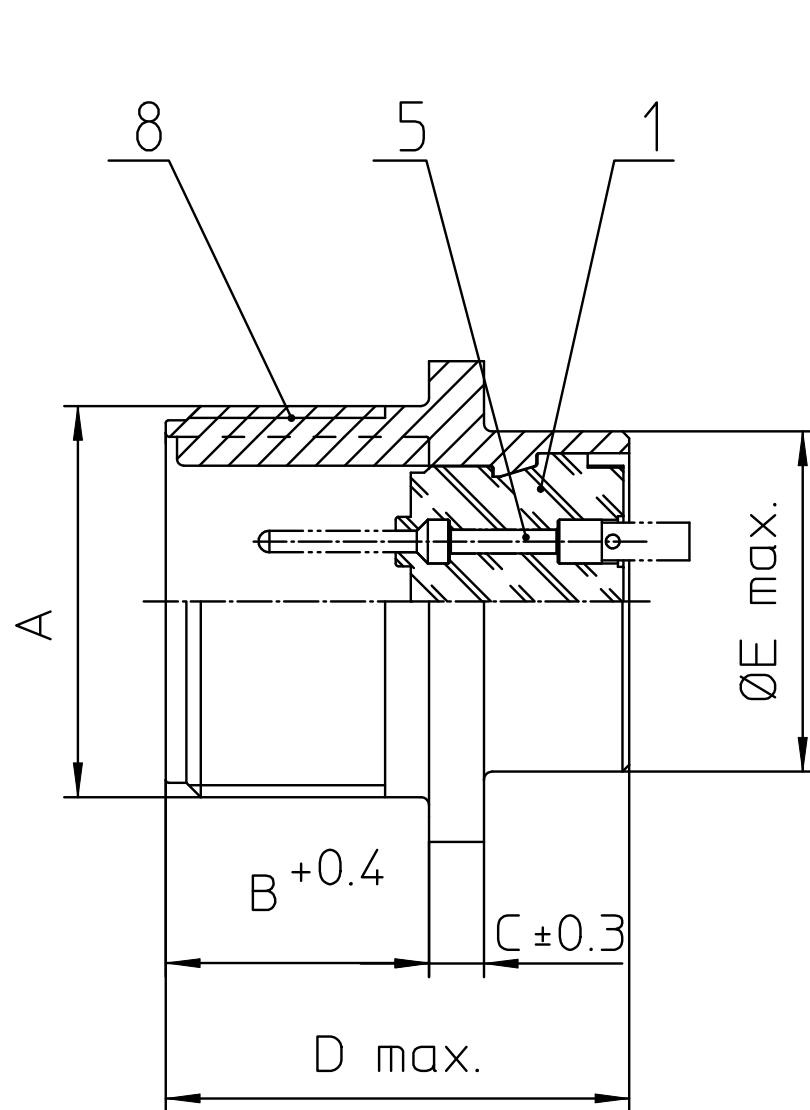

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 1 3/4-18NS-2A     |
| B   | 20.6              |
| C   | 4                 |
| D   | 34.2              |
| E   | 41.2              |
| F   | 39.7              |
| G   | 50.8              |
| H   | 3.7               |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 5   | KONTAKTSTIFT/ CONTACT PIN           |
| 8   | DOSENGEHÄUSE / SHELL                |



|                                                                                                    |                                                  |
|----------------------------------------------------------------------------------------------------|--------------------------------------------------|
| Note: Due to an automatic nomenclature system, numbers generated may not be sequential.            |                                                  |
| Specification and Dimensions subject to change<br>Drawings illustrate normal insulator positioning |                                                  |
| Material Specification:                                                                            |                                                  |
| Shell Material:                                                                                    | Aluminium alloy                                  |
| Shell Plating:                                                                                     | Olive drab chromate coating over cadmium plating |
| Insulator Material:                                                                                | Neoprene                                         |
| Contact Material:                                                                                  | Copper alloy                                     |
| Contact Plating:                                                                                   | Hard silver                                      |

|                                                                                                                                                                                                     |  |                                                                                                     |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------|--|
| all dimensions are in mm<br>Dimensions without tolerance indications are general tolerances in acc. with DIN7168m                                                                                   |  | drawing for<br>CUSTOMER                                                                             |  |
| <br><b>ITT</b><br><i>Engineered for life</i><br><small>ITT CANNON GmbH<br/>D - 71384 Weinstadt/Germany</small> |  | description CA3102E28-21PZ-F80-F0<br>Box mounting receptacle<br><br>AWG Crimp / Pin / Layout: 28-21 |  |
| © All rights reserved. Reproduction or issue to third in any form<br>whenever is only permitted with written authorization of ITT Cannon                                                            |  | page 1/1<br>revision 1001 16. Jul 20                                                                |  |