

Model 96 - 3186 series

Definite Purpose Contactor 3-pole, 75-90 FLA AC Coil

 File E75492
 File EN60947-4-1:1991
 IEC 947-4-1

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

Features

- 3-pole contactors.
- Convenient "universal" mounting plate.
- Optional interlock/auxiliary switches available.

Contact Data @ 25°C

Arrangements: 3 Form X (3PST-NO-DM).
Maximum Ratings: See Contact Ratings Table.
Material: Silver Cadmium Oxide.

Coil Data @ 25°C

Voltage: 24 - 480 VAC, 50/60 Hz. See Coil Data Table below.
Insulation Class: UL Class B (130°C).
Duty Cycle: Continuous.

Environmental Data

Temperature Range: Storage and Operating: -40°C – +65°C.
Flammability: UL 94-HB housing.

Mechanical Data

Contact Termination:

Type: Box Lug with dual 0.250" (6.35 mm) quick connects.
Wire Size: 14-1/0 Cu/Al AWG
Tightening Torque: 50 in.-lbs.
Coil Termination: 0.250" quick connect and a #6-32 screw.
Arc Cover: Standard.
Weight: 64 oz. (1820 g) approximately

Contact Ratings

Full Load Amps	Number of Poles	Line Voltage	Locked Rotor Amps	Resistive Amps	Tungsten/ Ballast Amps	Maximum Horsepower		
						Voltage	Single Phase	Three Phase
75	3	240	450	93	–	110/120	5	–
		480	375	93	63	200/208	10	20
		600	300	93	–	240/277	15	25
						480	–	40
						600	–	25
90	3	240	540	120	–	110/120	7.5	–
		480	450	120	63	200/208	15	25
		600	360	120	–	240/277	20	30
						480	–	50
						600	–	50

Coil Data

Nominal Coil Voltage	24	120	208/240	277	480
Maximum Pickup Volts	18	88	177	220	384
Drop-Out Volts Range	6-15	20 - 70	40 - 110	65-185	150 - 270
Nominal Inrush VA @ 50 Hz	285	285	285	285	285
Nominal Inrush VA @ 60 Hz	240	240	240	240	240
Nominal Sealed VA @ 50 Hz	42	42	42	42	42
Nominal Sealed VA @ 60 Hz	27	27	27	27	27
Nominal DC Resistance - Ohms	.63	15.6	63.5	84	255

Ordering Information

Typical Part No. ►

3186

-

30

I

90

999

1. Series:

3186 = 3-pole, 75-90 FLA contactor

2. Packaging:

Y = Individual Pack

- = Bulk Pack

A-ZZZ = Customer specific information (assigned by factory)

3. Pole Configuration:

30 = 3 Form X (3PST-NO-DM)

4. Coil Voltage (50/60 Hz.):

I = 24VAC, molded

K = 208/240VAC, molded

W = 480VAC, molded

J = 120VAC, molded

M = 277VAC, molded

5. Contact Ratings (Inductive):

75 = 75 FLA 90 = 90 FLA

6. Customer ID Suffix:

999 = Standard Model

000-998 = Factory assigned customer ID

7. Option Code:

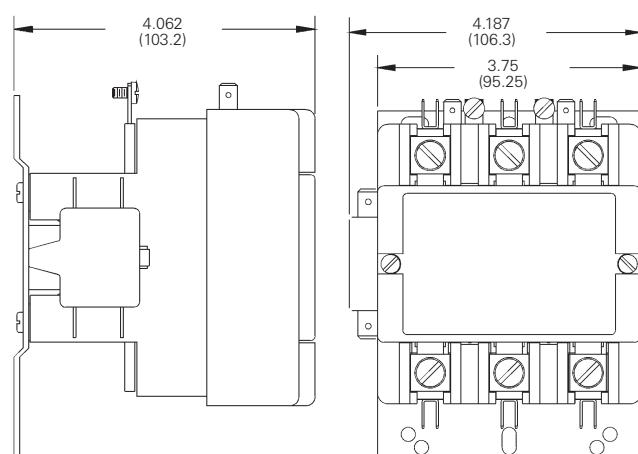
Leave Blank = No customer-specific options

A - ZZ = Factory assigned customer-specific options.

Standard part numbers listed below are more likely to be available from stock.






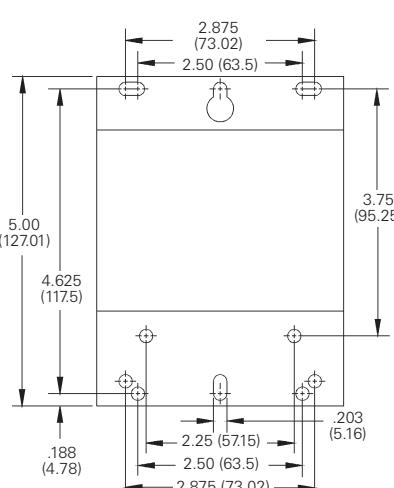
None at present.

Outline Dimensions




Shown with Optional Auxiliary Switch

Various interlock / auxiliary switches are available for the Model 96 contactor.

NORMALLY OPEN
-303 STYLENORMALLY CLOSED
-331 STYLENORMALLY OPEN & CLOSED
-332 STYLESPDT
-337 & -341 STYLEW/ #6-32 SCREW & SADDLE CLAMP
-344 STYLE

Termination

Standard
on 75-90 FLA
Lug accepts 14-1/0
Cu/Al AWG

Equipped with 0.250" (6.35) Quick Connect Terminals

Factory Modifications		Field Added Kits	
Description	Contact Config. NO NC	Kit Catalog Number	Number of Kits Required
Single unit interlock configurations listed. Maximum of two. Must be same polarity. See footnote (1) for ratings.	1 0 0 1 1 1 2 0 0 2 2 2	34300-303 34300-331 34300-332 34300-303 34300-331 34300-332	1 1 1 2 2 2
SPDT Circuit See footnote (2) for ratings.	1 1 2 2	34300-337 34300-337	1 2
SPDT Dry Circuit, 0.1 amp max. Gold Flashed Contacts	1 1 2 2	34300-341 34300-340	1 1

Equipped with #6-32 Screw Terminals & Saddle Clamps

Factory Modifications		Field Added Kits	
Description	Contact Config. NO NC	Kit Catalog Number	Number of Kits Required
Single unit interlock configurations listed. Maximum of two. Must be same polarity. (note 1)	1 0 0 1 1 1	34300-342 34300-343 34300-344	1 1 1

Footnotes: Ratings of Auxiliary Interlocks / Switches

(1) Contact Rating Single Circuit NO or NC and two circuit NO/NC:	(2) Contact Rating SPDT (337): 10A, 1/3 HP, 125 or 250 VAC 1/2A, 125 VDC; 1/4A, 250 VDC: 4A 120 VAC on Lamp Load
Break	120V 240V 480V 600V 3.0A 1.5A 0.75A 0.6A
Make	30A 15A 7.5A 6A
Continuous	10A 10A 10A 10A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3186Y30I90999CJ](#)