
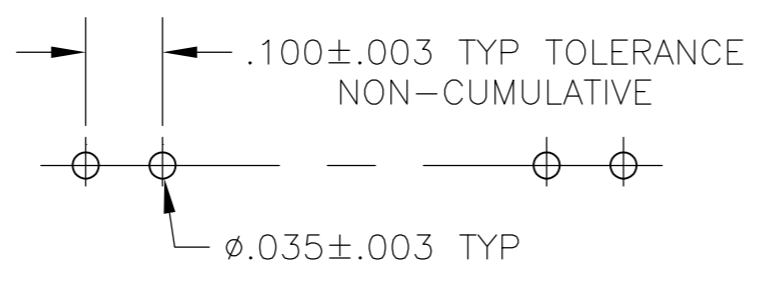


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	REVISED PER ECO-14-000068	23APR2014	NK	MM

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS.
- 2 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 3 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 4 BREAKAWY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

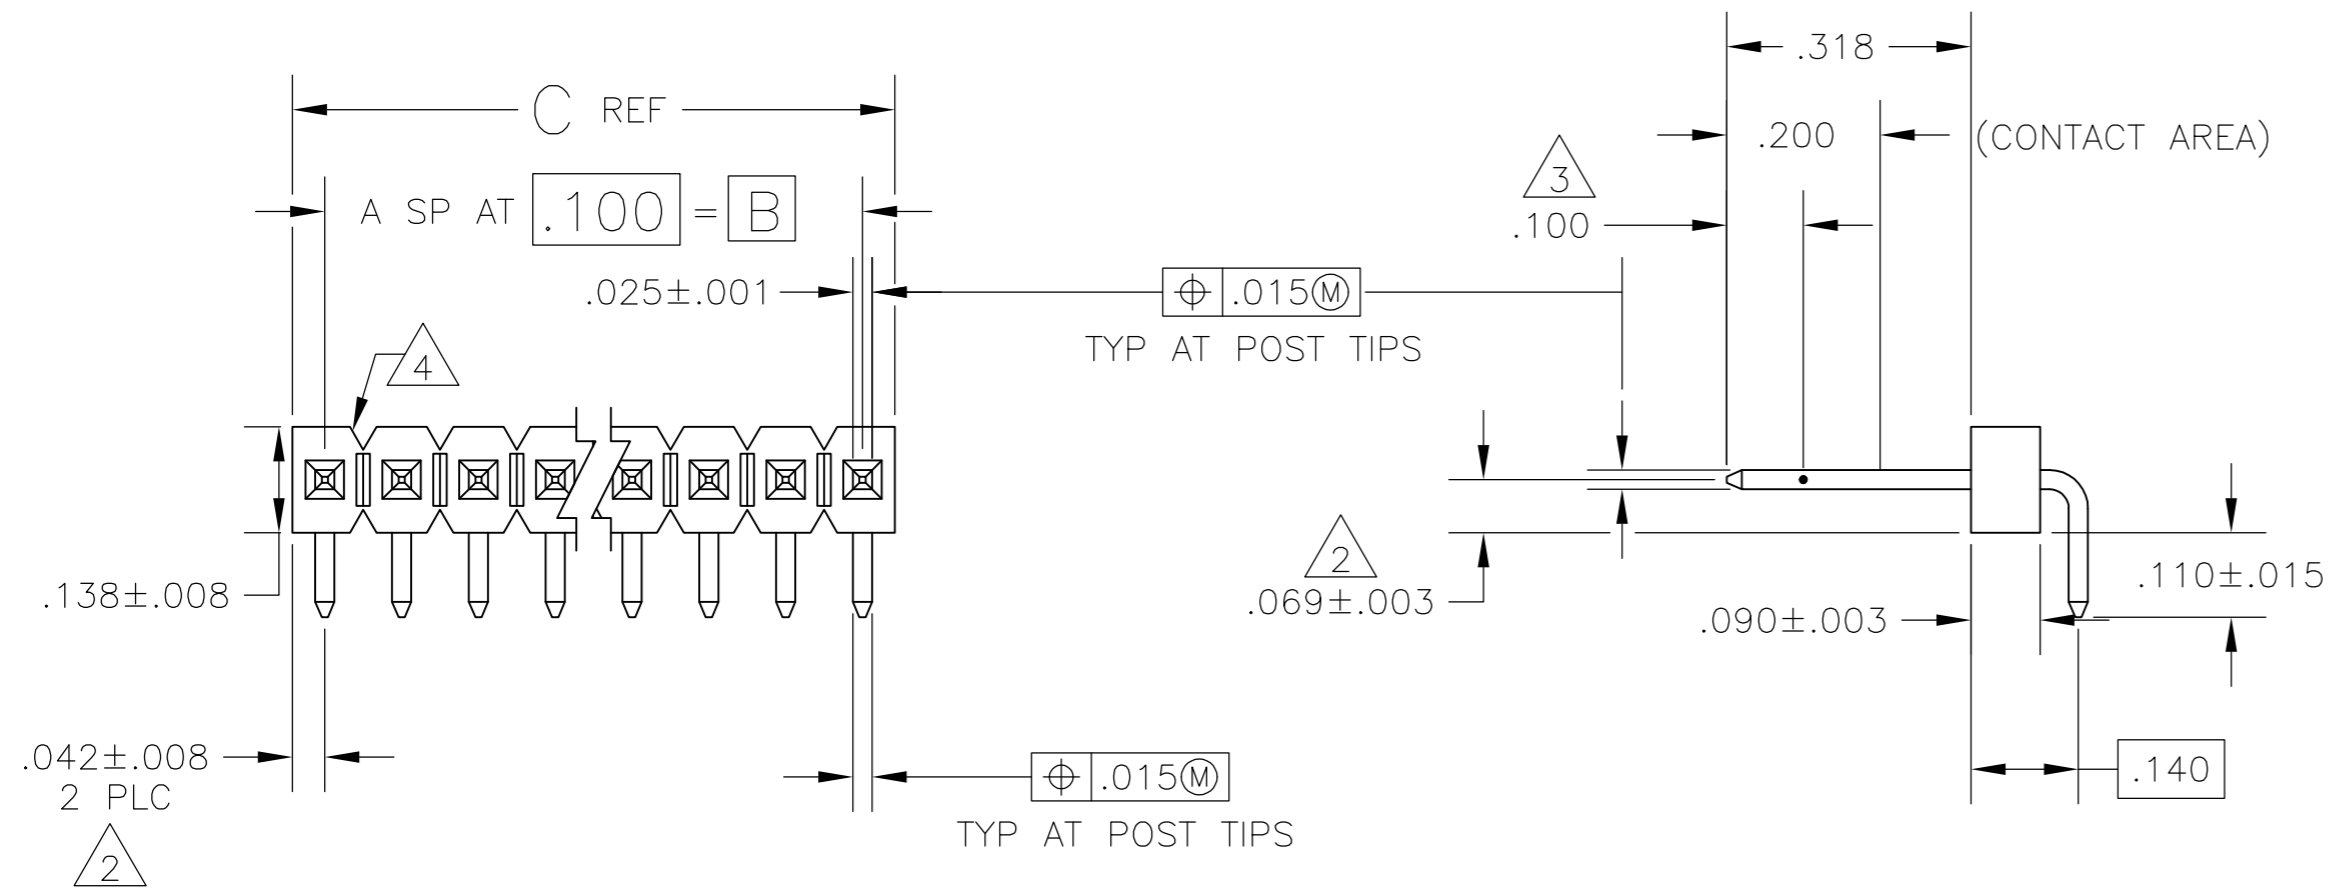

RECOMMENDED HOLE LAYOUT

	C	B	A	NO OF POSN	PART NUMBER
3.984	3.900	39	40	4	102978-0
3.884	3.800	38	39	3	102978-9
3.784	3.700	37	38	3	102978-8
3.684	3.600	36	37	3	102978-7
3.584	3.500	35	36	3	102978-6
3.484	3.400	34	35	3	102978-5
3.384	3.300	33	34	3	102978-4
3.284	3.200	32	33	3	102978-3
3.184	3.100	31	32	3	102978-2
3.084	3.000	30	31	3	102978-1
2.984	2.900	29	30	3	102978-0
2.884	2.800	28	29	2	102978-9
2.784	2.700	27	28	2	102978-8
2.684	2.600	26	27	2	102978-7
2.584	2.500	25	26	2	102978-6
2.484	2.400	24	25	2	102978-5
2.384	2.300	23	24	2	102978-4
2.284	2.200	22	23	2	102978-3
2.184	2.100	21	22	2	102978-2
2.084	2.000	20	21	2	102978-1
1.984	1.900	19	20	2	102978-0
1.884	1.800	18	19	1	102978-9
1.784	1.700	17	18	1	102978-8
1.684	1.600	16	17	1	102978-7
1.584	1.500	15	16	1	102978-6
1.484	1.400	14	15	1	102978-5
1.384	1.300	13	14	1	102978-4
1.284	1.200	12	13	1	102978-3
1.184	1.100	11	12	1	102978-2
1.084	1.000	10	11	1	102978-1
.984	.900	9	10	1	102978-0
.884	.800	8	9	1	102978-9
.784	.700	7	8	1	102978-8
.684	.600	6	7	1	102978-7
.584	.500	5	6	1	102978-6
.484	.400	4	5	1	102978-5
.384	.300	3	4	1	102978-4
.284	.200	2	3	1	102978-3
.184	.100	1	2	1	102978-2
.084	—	—	1	1	102978-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	15OCT87	STE TE Connectivity	
		CHK	20OCT87		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC	± -	T. CLARK	
		1 PLC	± -	APVD	
		2 PLC	± -	T. CLARK	
		3 PLC	± .005	20OCT87	
MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK; POSTS: COPPER ALLOY		FINISH: POSTS .00030 GOLD ON CONTACT AREA; .00010-.00020 MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER; .00050 NICKEL		PRODUCT SPEC	
		WEIGHT		APPLICATION SPEC	
		SCALE		DRAWING NO	
		CUSTOMER DRAWING		RESTRICTED TO	
		SCALE 4:1		SHEET 1 OF 1	
		REV G			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[4-102978-0](#)