

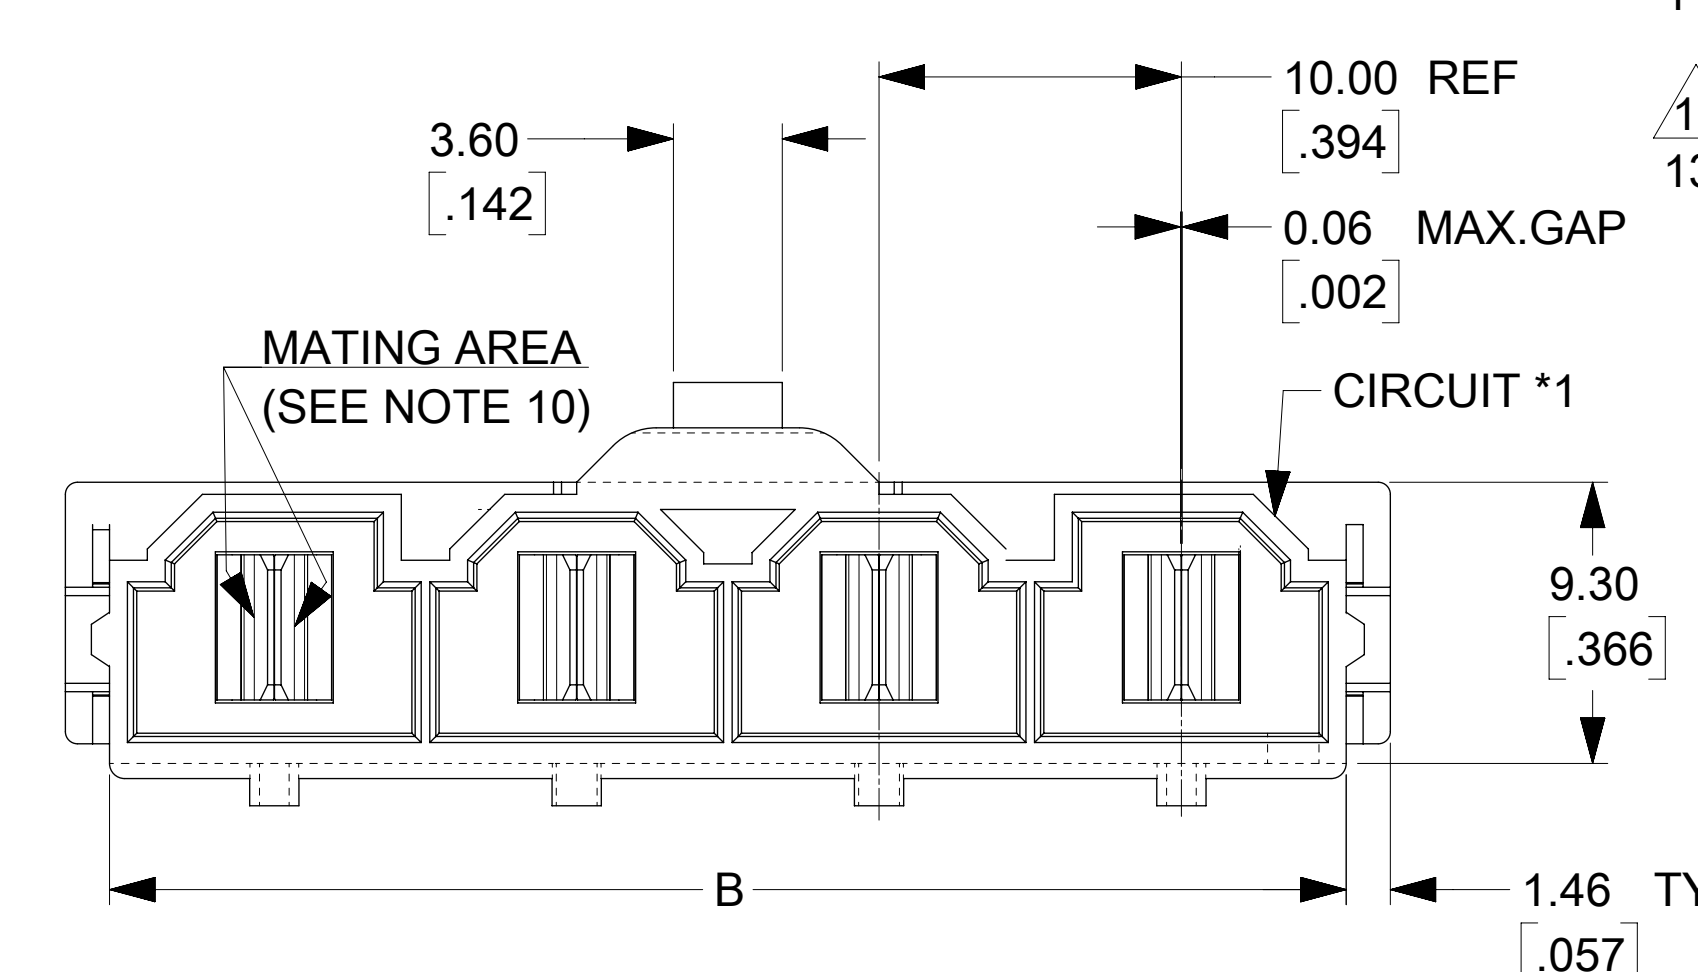





ITEM NUMBER	CKT. SIZE	DIM. A	DIM. B	DIM. C	TERMINAL PLATING	CLIP PLATING	STATUS
L 428192213	2	.138/[3.50]	.823/[20.90]	.071/[1.80]	SELECT GOLD IN CONTACT AREA (SEE LEGEND)	ACTIVE	
428192223	2	.201/[5.10]	.823/[20.90]	.102/[2.60]			
428192233	2	.201/[5.10]	.823/[20.90]	.134/[3.40]			
428192243	2	.327/[8.30]	.823/[20.90]	.259/[6.58]			
K 428193213	3	.138/[3.50]	1.216/[30.90]	.071/[1.80]			
428193223	3	.201/[5.10]	1.216/[30.90]	.102/[2.60]			
428193233	3	.201/[5.10]	1.216/[30.90]	.134/[3.40]			
428193243	3	.327/[8.30]	1.216/[30.90]	.259/[6.58]			
428194213	4	.138/[3.50]	1.610/[40.90]	.071/[1.80]			
428194223	4	.201/[5.10]	1.610/[40.90]	.102/[2.60]			
J 428194233	4	.201/[5.10]	1.610/[40.90]	.134/[3.40]			
428194243	4	.327/[8.30]	1.610/[40.90]	.259/[6.58]			
428195213	5	.138/[3.50]	2.004/[50.90]	.071/[1.80]	SELECT MATTE TIN ON SOLDER TAILS		
428195223	5	.201/[5.10]	2.004/[50.90]	.102/[2.60]			
428195233	5	.201/[5.10]	2.004/[50.90]	.134/[3.40]			
428195243	5	.327/[8.30]	2.004/[50.90]	.259/[6.58]			
H 428196213	6	.138/[3.50]	2.398/[60.90]	.071/[1.80]			
428196223	6	.201/[5.10]	2.398/[60.90]	.102/[2.60]			
I 428196233	6	.201/[5.10]	2.398/[60.90]	.134/[3.40]			
428196243	6	.327/[8.30]	2.398/[60.90]	.259/[6.58]			
G 428192214	2	.138/[3.50]	.823/[20.90]	.071/[1.80]	SELECT SILVER IN CONTACT AREA (SEE LEGEND)	NONE	
428192224	2	.201/[5.10]	.823/[20.90]	.102/[2.60]			
428192234	2	.201/[5.10]	.823/[20.90]	.134/[3.40]			
428192244	2	.327/[8.30]	.823/[20.90]	.259/[6.58]			
428193214	3	.138/[3.50]	1.216/[30.90]	.071/[1.80]			
428193224	3	.201/[5.10]	1.216/[30.90]	.102/[2.60]			
428193234	3	.201/[5.10]	1.216/[30.90]	.134/[3.40]			
428193244	3	.327/[8.30]	1.216/[30.90]	.259/[6.58]			
F 428194214	4	.138/[3.50]	1.610/[40.90]	.071/[1.80]			
428194224	4	.201/[5.10]	1.610/[40.90]	.102/[2.60]			
428194234	4	.201/[5.10]	1.610/[40.90]	.134/[3.40]			
428194244	4	.327/[8.30]	1.610/[40.90]	.259/[6.58]			
E 428195214	5	.138/[3.50]	2.004/[50.90]	.071/[1.80]	SELECT MATTE TIN ON SOLDER TAILS		
428195224	5	.201/[5.10]	2.004/[50.90]	.102/[2.60]			
428195234	5	.201/[5.10]	2.004/[50.90]	.134/[3.40]			
428195244	5	.327/[8.30]	2.004/[50.90]	.259/[6.58]			
D 428196214	6	.138/[3.50]	2.398/[60.90]	.071/[1.80]			
428196224	6	.201/[5.10]	2.398/[60.90]	.102/[2.60]			
C 428196234	6	.201/[5.10]	2.398/[60.90]	.134/[3.40]			
428196244	6	.327/[8.30]	2.398/[60.90]	.259/[6.58]			

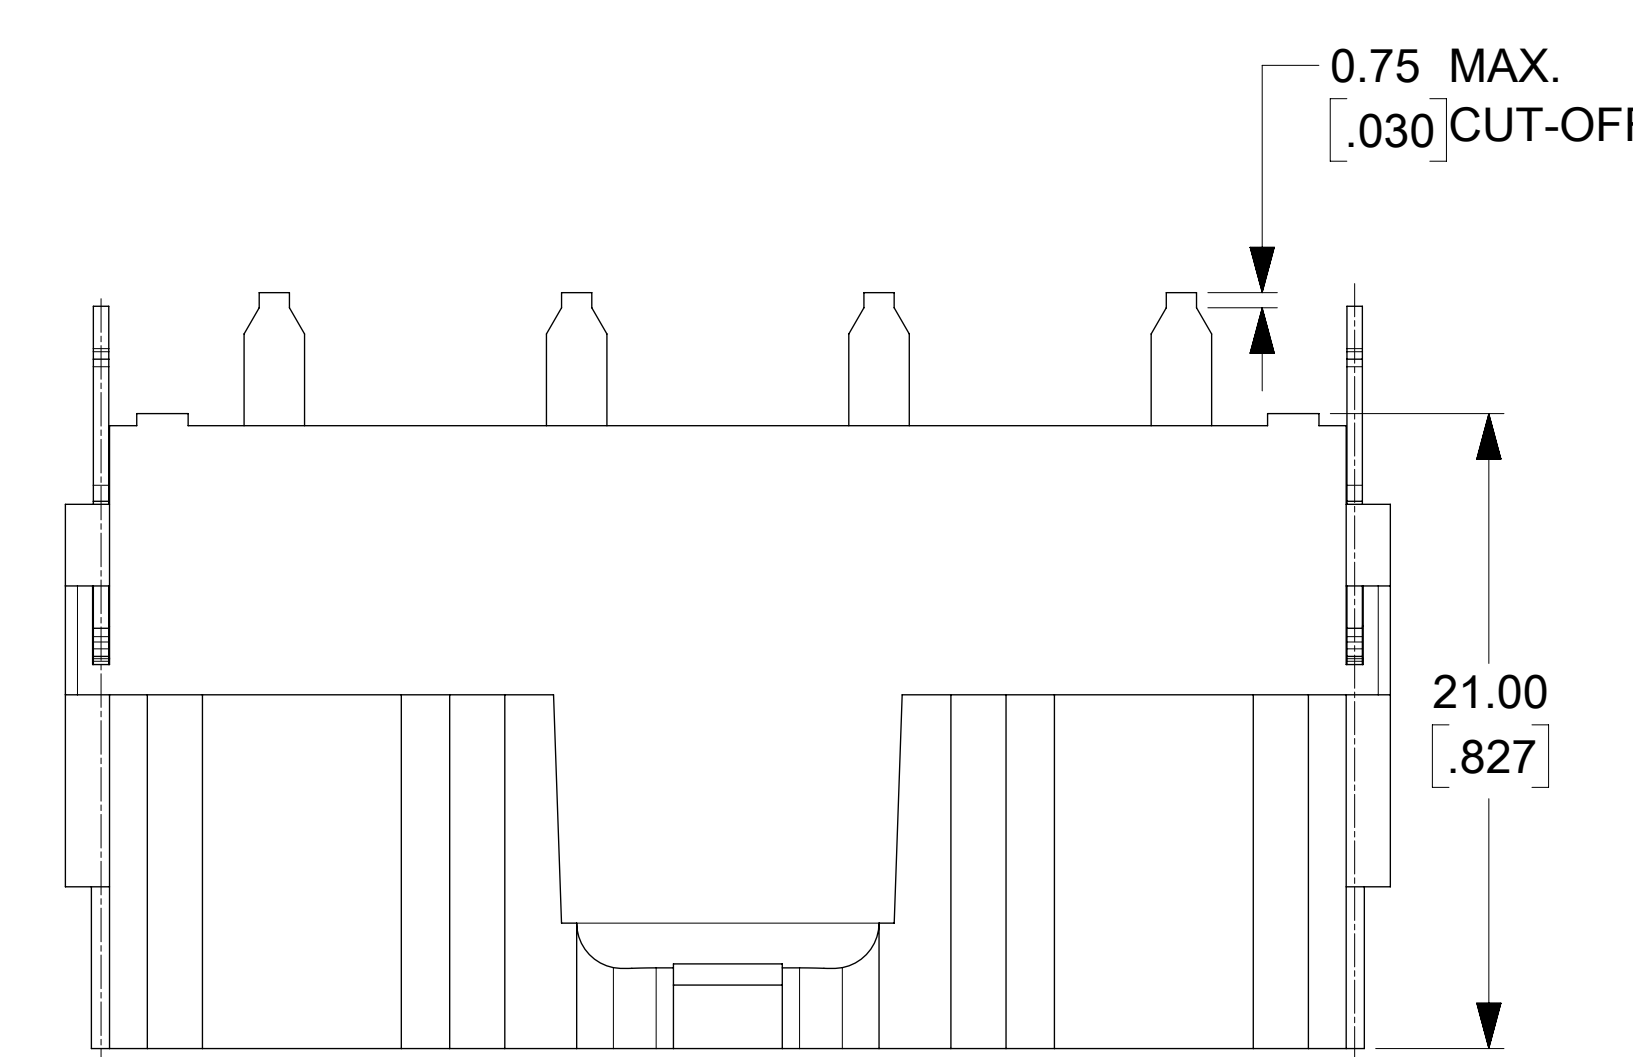

- NOTES:
- MATERIAL:
HOUSING MATERIAL: 30%GLASS-FILLED NYLON4/6, U.L.94V-0, COLOR: BLACK.
TERMINAL MATERIAL: ALLOY 151.
 - FINISH: 2 = .000100/(.00254) MIN. *TIN OVER .000050/(.00127) MIN. NICKEL.
3 = .000030/(.00076) MIN. SELECT GOLD IN CONTACT AREA. .000100/(.00254) MIN. SELECT *TIN ON SOLDER TAILS OVER .000050/(.00127) MN.NICKEL.
4 = .000100/(.00254) MIN. SELECT SILVER IN CONTACT AREA .000100/(.00254) MIN. SELECT TIN ON SOLDER TAILS OVER .000050/(.00127) MIN. NICKEL.
* THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLAINT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD.
 - PRODUCT SPECIFICATION: PS-42815-001
 - PACKAGING INFORMATION: PK-42819-2375
 - PART MATES WITH MOLEX RECEPTACLE #42816-***2 WITH T.P.A.
 - PART IS DESIGNED IN METRIC.
 - AN "X" IN FRONT OF THE ITEM NUMBER INDICATES THE PART IS NOT TOOLED.
 - THIS PART MEETS U.L.1950 REQUIREMENTS FOR CREEPAGE AND CLEARANCE AT 600 VAC AND 840 VDC.
 - PARTS ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
 - WHEN USING OVERALL TIN PLATED TERMINALS: FOR APPLICATIONS INVOLVING VIBRATION AND/OR THERMAL CYCLING, MOLEX STRONGLY RECOMMENDS THE USE OF NYE LUBRICANT (NYOGEL 7600) ON THE MATING SURFACES OF THE TERMINAL.
 - PARTS CONFORMS TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002
 - BOARD CLIP HOLE MAY OR MAY NOT BE PLATED. REFER TO CHART FOR PLATED / UNPLATED CLIPS.
 - REFER AS-42815-001 FOR TIN PLATED TERMINALS RECOMMENDED LUBRICATION PROCEDURE.

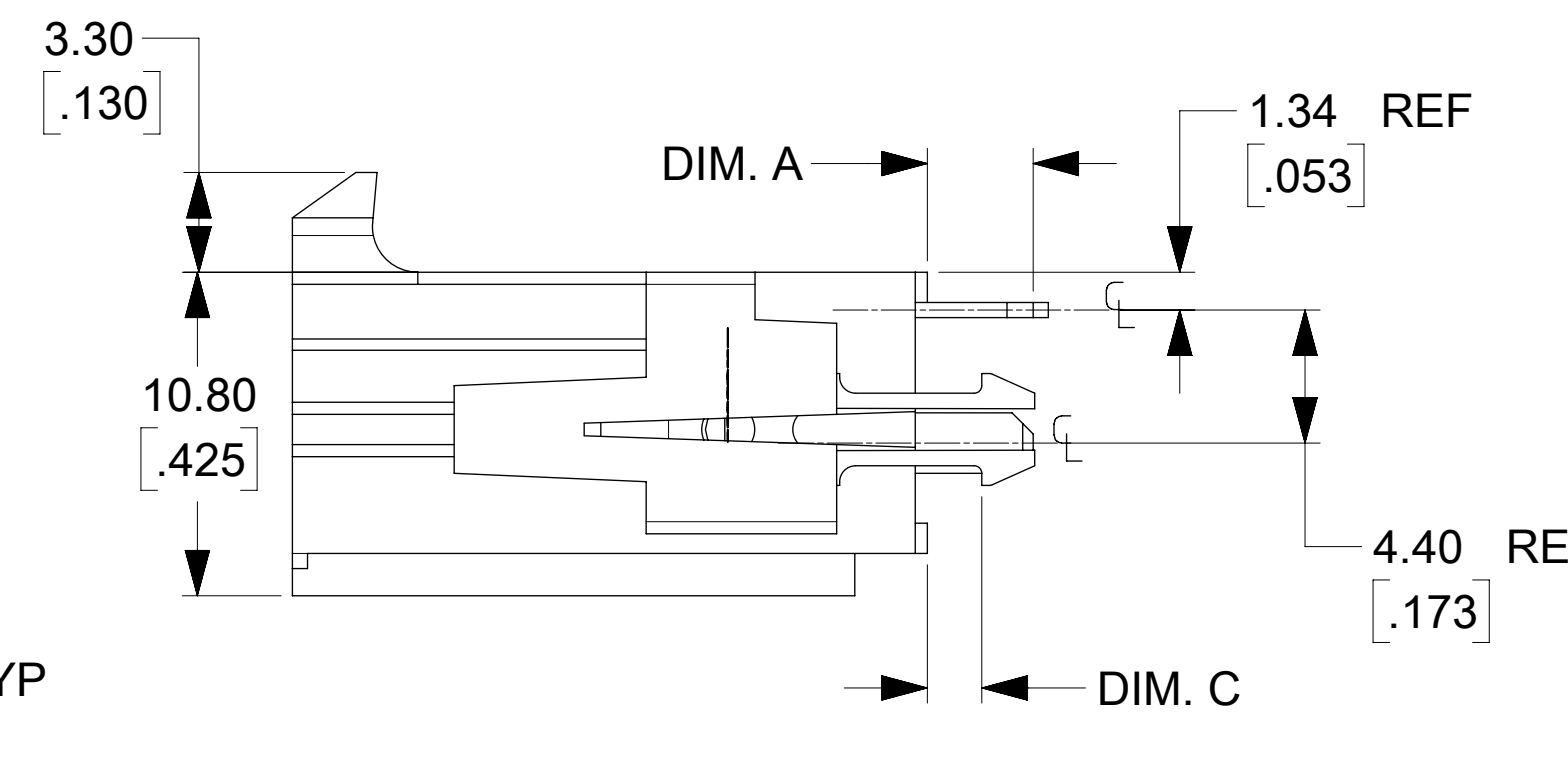

- LEGEND:
- A-42819 - ***
- CIRCUIT SIZE (2-6)
- MOUNTING OPTION
1 = FLANGES (SEE DWG. SDA-42819-1**
2 = RETENTION CLIP
- P.C.BOARD THICKNESS
1 = .062/(1.57) NOMINAL
2 = .093/(2.36) NOMINAL
3 = .125/(3.18) NOMINAL
4 = .250/(6.35) NOMINAL
- PLATING
2 OR 9 = OVERALL BRIGHT TIN OVER NICKEL
3 = SELECT GOLD IN CONTACT AREA
SELECT MATTE TIN ON SOLDER TAILS OVER NICKEL
4 = SELECT SILVER IN CONTACT AREA
SELECT MATTE TIN ON SOLDER TAILS OVER NICKEL

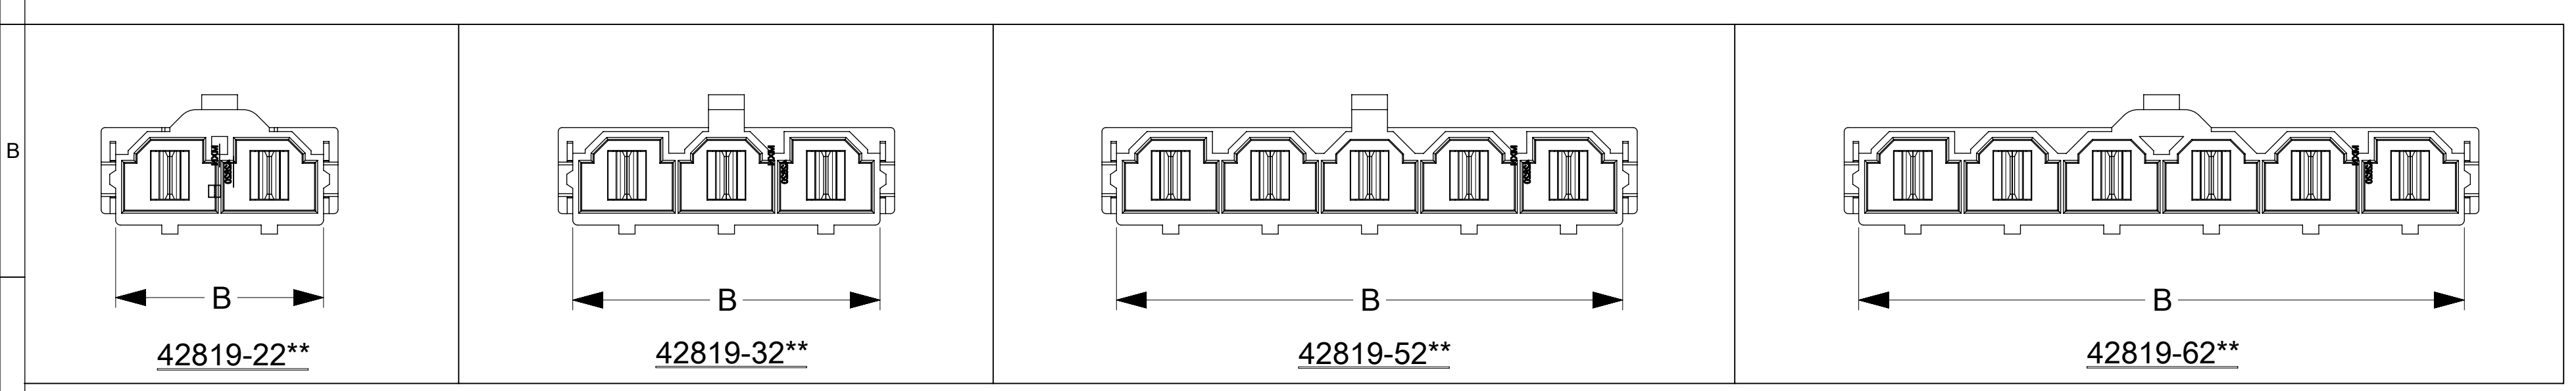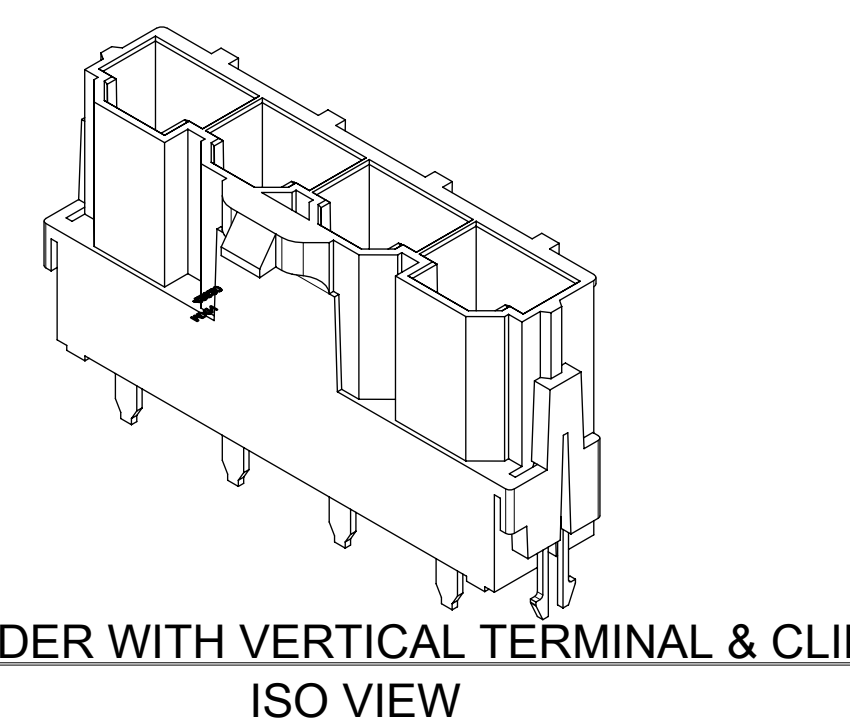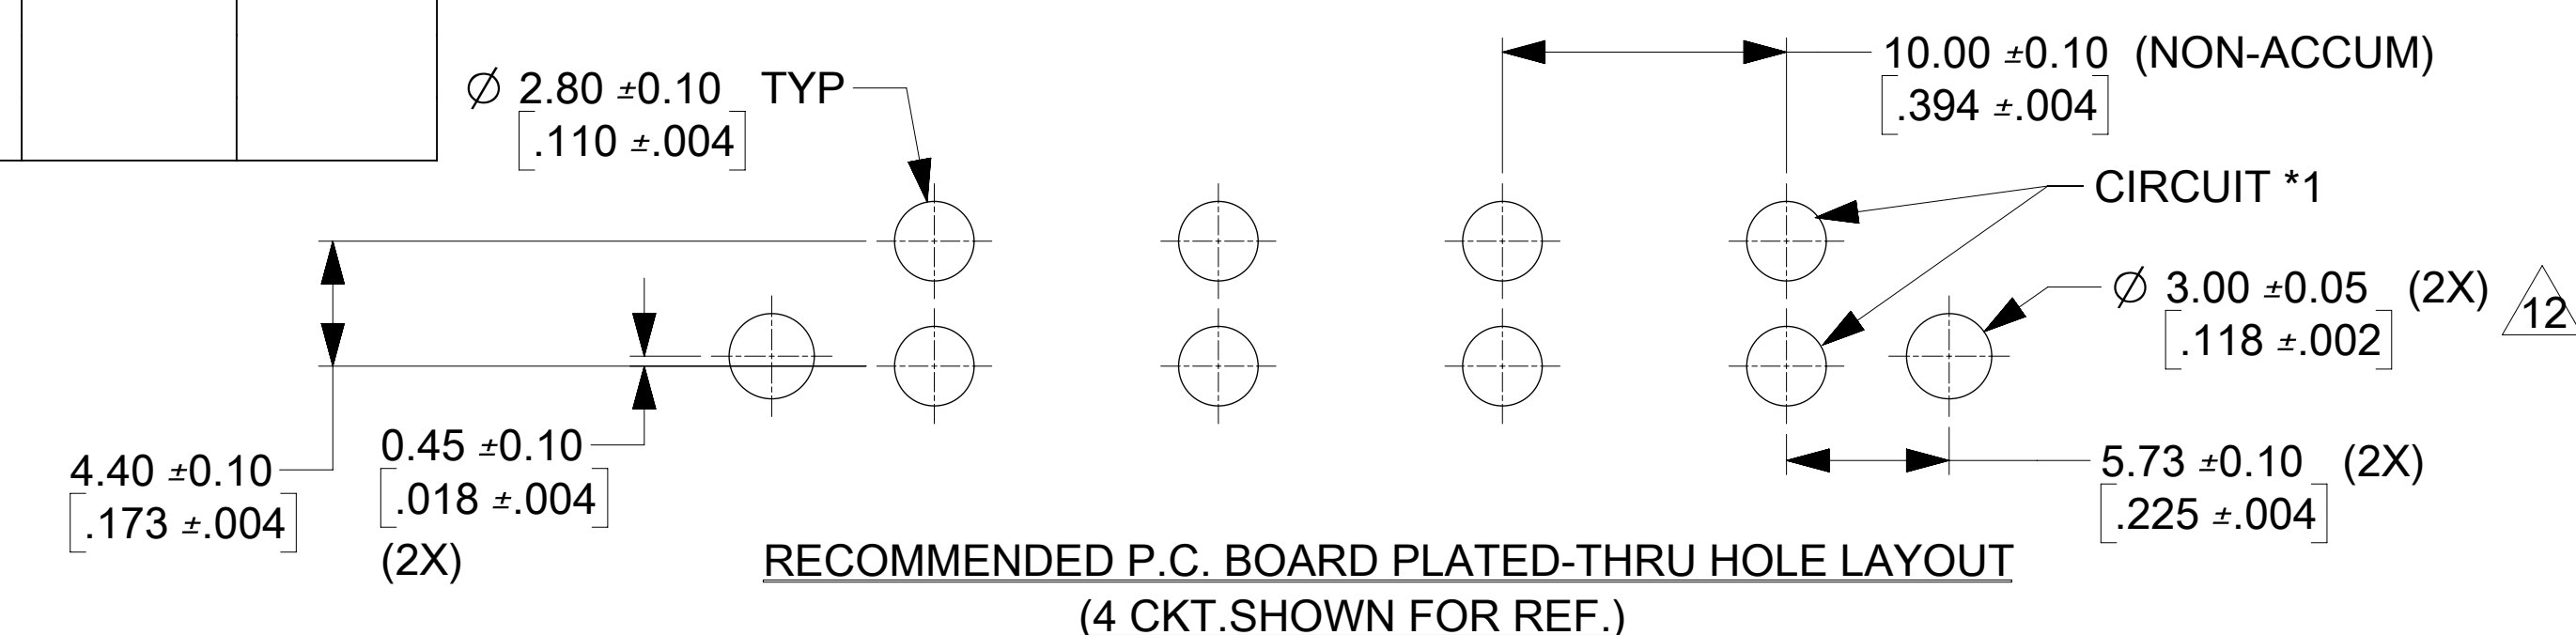

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS	SCALE	CURRENT REV DESC: DIMENSION & 2CKT VIEW UPDATE	
IN/MM	4:1		
GENERAL TOLERANCES (UNLESS SPECIFIED)			
4 PLACES ±	±	EC NO: 645165	
3 PLACES ±	±	DRWN: SCV	2020/08/25
2 PLACES ±	0.25 ±	CHK'D: KCHIKKANNA	2020/09/11
1 PLACE ±	0.4 ±	APPR: ISHWARG	2020/09/11
0 PLACES ±	±	INITIAL REVISION:	
ANGULAR TOL ±	0.5 °	DRWN: GES	2014/02/12
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPR: KPRASAD	2015/02/09
THIRD ANGLE PROJECTION		DRAWING	SERIES
D-SIZE		42819	
MATERIAL NUMBER		CUSTOMER	SHEET NUMBER
SEE CHART		GENERAL MARKET	1 OF 2

DOCUMENT NUMBER: SDA-42819-0002
DOC TYPE: PSD
DOC PART: 001
REVISION: F1

DOCUMENT STATUS: P1
RELEASE DATE: 2020/09/11 15:20:02



VERTICAL
HEADER ASSEMBLY MINIFIT SR. SERIES

PRODUCT CUSTOMER DRAWING

ITEM NUMBER	CKT. SIZE	DIM. A	DIM. B	DIM. C	TERMINAL PLATING	CLIP PLATING	STATUS
428192212	2	3.50 [.138]	20.90 [.823]	1.80 [.071]	OVERALL BRIGHT TIN	NONE	PLANNED FOR OBSOLESCENCE
428192222	2	5.10 [.201]	20.90 [.823]	2.60 [.102]			
428192229	2	5.10 [.201]	20.90 [.823]	2.60 [.102]			
428192232	2	5.10 [.201]	20.90 [.823]	3.40 [.134]			
428192242	2	8.30 [.327]	20.90 [.823]	6.58 [.259]			
428193212	3	3.50 [.138]	30.90 [1.216]	1.80 [.071]			
428193222	3	5.10 [.201]	30.90 [1.216]	2.60 [.102]			
428193232	3	5.10 [.201]	30.90 [1.216]	3.40 [.134]			
428193242	3	8.30 [.327]	30.90 [1.216]	6.58 [.259]			
428194212	4	3.50 [.138]	40.90 [1.610]	1.80 [.071]			
428194222	4	5.10 [.201]	40.90 [1.610]	2.60 [.102]			
428194232	4	5.10 [.201]	40.90 [1.610]	3.40 [.134]			
428194242	4	8.30 [.327]	40.90 [1.610]	6.58 [.259]			
428195212	5	3.50 [.138]	50.90 [2.004]	1.80 [.071]			
428195222	5	5.10 [.201]	50.90 [2.004]	2.60 [.102]			
428195232	5	5.10 [.201]	50.90 [2.004]	3.40 [.134]			
428195242	5	8.30 [.327]	50.90 [2.004]	6.58 [.259]			
428196212	6	3.50 [.138]	60.90 [2.398]	1.80 [.071]			
428196222	6	5.10 [.201]	60.90 [2.398]	2.60 [.102]			
428196232	6	5.10 [.201]	60.90 [2.398]	3.40 [.134]			
428196242	6	8.30 [.327]	60.90 [2.398]	6.58 [.259]			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS IN/MM		SCALE 1:2		CURRENT REV DESC: DIMENSION & 2CKT VIEW UPDATE				molex	
GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 645165		DRWN: SCV 2020/08/25			
		MM	INCH	3 PLACES ±		CHK'D: KCHIKKANNA 2020/09/11		VERTICAL HEADER ASSEMBLY MINIFIT SR. SERIES	
				2 PLACES ± 0.25 ±		APPR: ISHWARG 2020/09/11		PRODUCT CUSTOMER DRAWING	
				1 PLACE ± 0.4 ±		INITIAL REVISION:		DOCUMENT NUMBER	
				0 PLACES ±		DRWN: GES 2014/02/12		SDA-42819-0002	
				ANGULAR TOL ± 0.5 °		APPR: KPRASAD 2015/02/09		PSD 001 F1	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES	
						D-SIZE		42819	
DOCUMENT STATUS P1				RELEASE DATE 2020/09/11 15:20:02		MATERIAL NUMBER		CUSTOMER	
						SEE CHART		GENERAL MARKET	
								SHEET NUMBER	
								2 OF 2	