



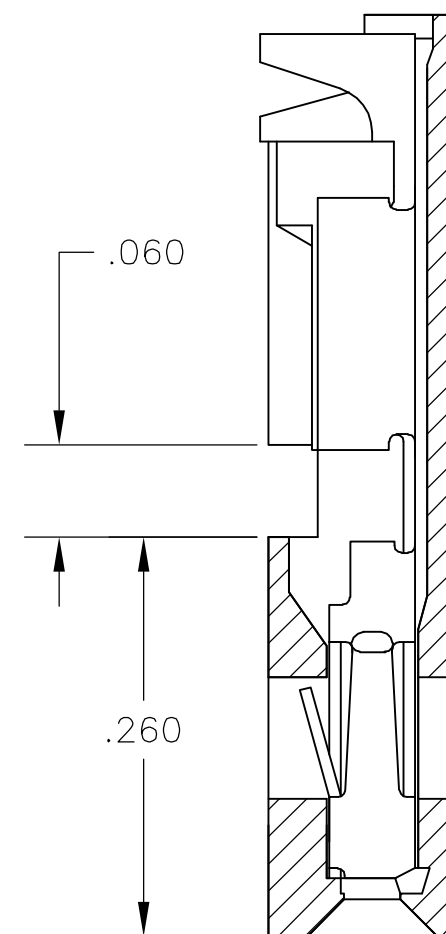

1	CAVITY LOCATION DIMENSIONS INCREASE INCREMENTS OF .100 TOLERANCE NON-CUMULATIVE.
2	.000030 GOLD IN CONTACT AREA, .000050-.000100 TIN-LEAD IN AREA D, ALL OVER .000050 NICKEL.
3	.000030 GOLD IN CONTACT AREA, .000050-.000100 TIN IN AREA D, ALL OVER .000050 NICKEL.
4	ROHS 2002/95/EC COMPLIANT.

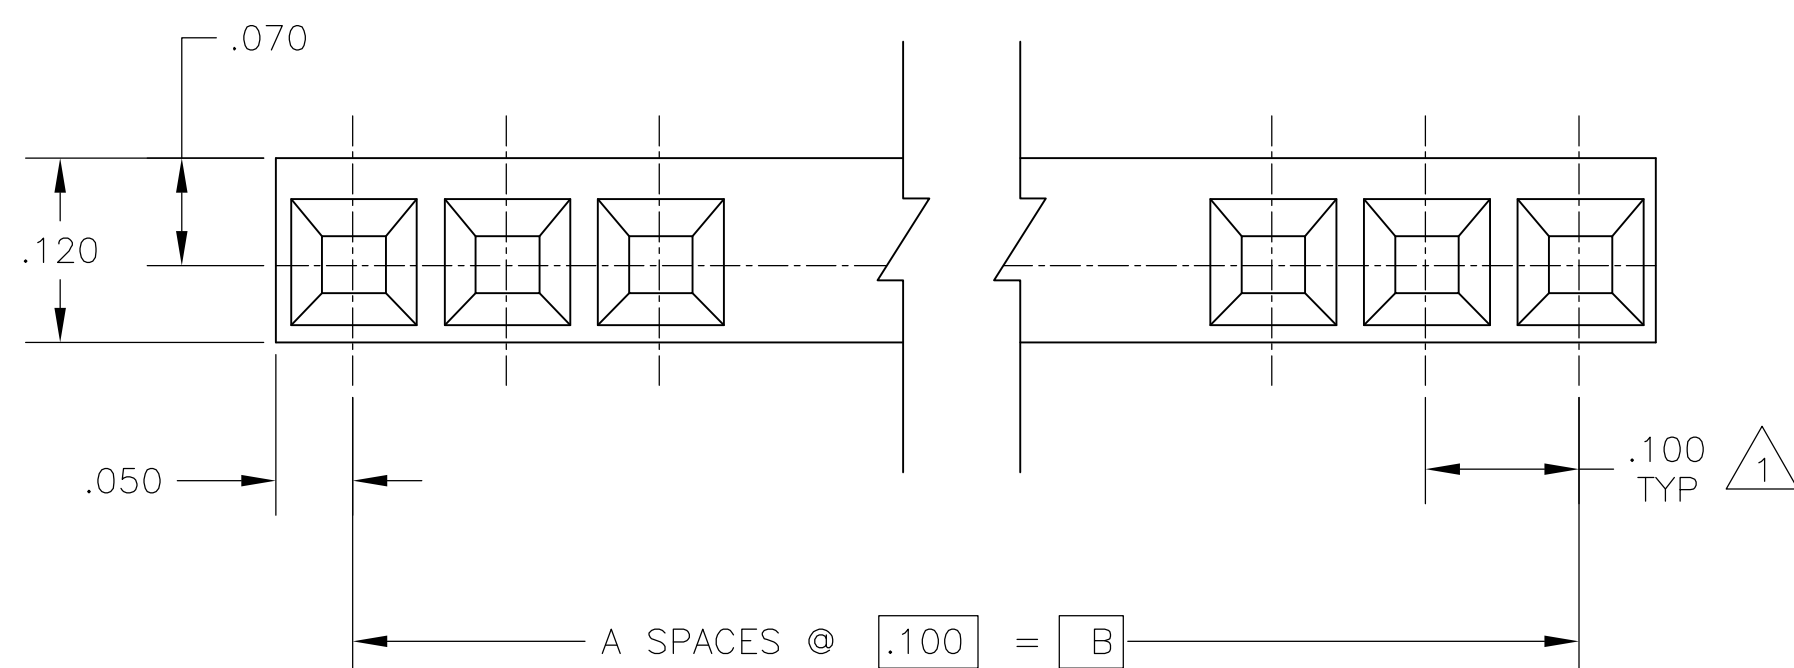

SECTION X-X

		1.700	1.600	16	17	6-102747-7
OBSOLETE		2.500	2.400	24	25	2-102747-5
		2.400	2.300	23	24	2-102747-4
		2.300	2.200	22	23	2-102747-3
		2.200	2.100	21	22	2-102747-2
		2.100	2.000	20	21	2-102747-1
		2.000	1.900	19	20	2-102747-0
		1.900	1.800	18	19	1-102747-9
		1.800	1.700	17	18	1-102747-8
		1.700	1.600	16	17	1-102747-7
OBSOLETE		1.600	1.500	15	16	1-102747-6
		1.500	1.400	14	15	1-102747-5
		1.400	1.300	13	14	1-102747-4
		1.300	1.200	12	13	1-102747-3
		1.200	1.100	11	12	1-102747-2
		1.100	1.000	10	11	1-102747-1
		1.000	.900	9	10	1-102747-0
		.900	.800	8	9	102747-9
		.800	.700	7	8	102747-8
		.700	.600	6	7	102747-7
		.600	.500	5	6	102747-6
		.500	.400	4	5	102747-5
		.400	.300	3	4	102747-4
		.300	.200	2	3	102747-3
		.200	.100	1	2	102747-2
			—	—	—	—
		C	B	A	NO.OF POS.	PART NO.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-102747-7](#)