

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0940304201

Status:


Active

Overview:

Standard Quick-Disconnect Terminals

Description:

Quick Disconnect, Female for (0.25-0.50mm²) 20-24 AWG Wire, Accepts 2.80 x 0.50mm Tab, Tin

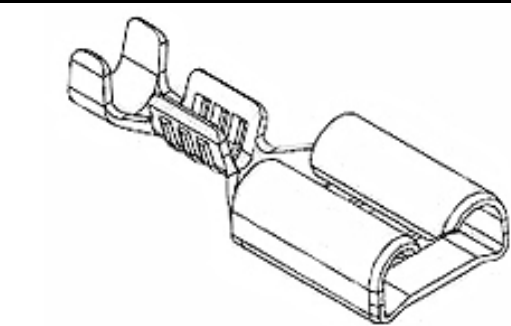

Series image - Reference only

Documents:

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

General	
Product Family	Quick Disconnects
Series	94030
Crimp Quality Equipment	Yes
Data Load Status	Collected FY08-Verified FY08
Doc Info - Component	CAT-94030-009_1, SD-94030-420X-M_A
Insulated	No
Made From	0940304209
Overview	Standard Quick-Disconnect Terminals
Product Name	N/A
Type	Quick Disconnect
UPC	800753536548
Physical	
Barrel Type	Open
Gender	Female
Glow-Wire Capable	No
Insulation	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Tin
Net Weight	0.250/g
Orientation	Straight
Packaging Type	Reel
Plating min - Mating	2.032µm
Polarized to Mating Part	Yes
Tab Thickness	0.81mm
Tab Width	2.79mm
Temperature Range - Operating	80°C
Temperature Range NonOperating	-25°C to +60°C
Wire Insulation Diameter	0.60-2.00mm
Wire Size AWG	20, 22, 24
Wire Size mm²	0.25-0.50
Electrical	
Voltage - Maximum	250V
Solder Process Data	
Lead-freeProcess Capability	N/A
Material Info	
Reference - Drawing Numbers	
Sales Drawing	SD-94030-420X-M

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per

-ED/01/2018 (15

January 2018)

Halogen-Free

Status

Not Relevant

Need more information on product

environmental compliance?

Email productcompliance@molex.com

Please visit the [Contact Us](#) section for any

non-product compliance questions.

China ROHS

Not Relevant

ELV

Compliant

RoHS Phthalates

Not Contained

Search Parts in this Series

94030 Series

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[94030-4201](#)